


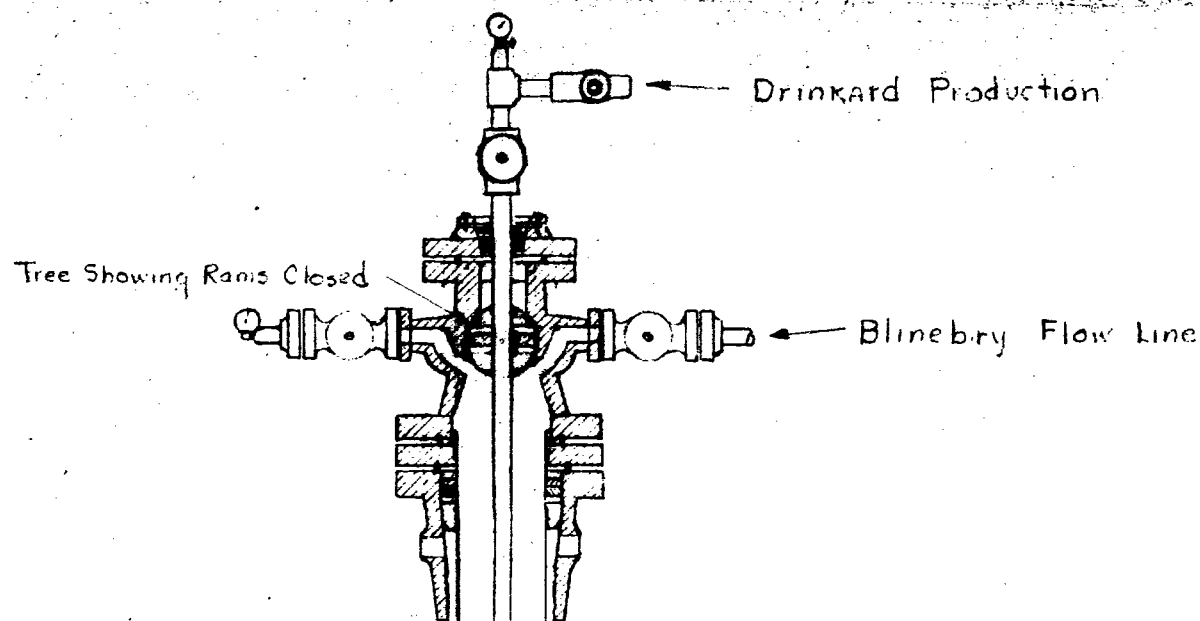

8 $\frac{5}{8}$ " Casing Cemented @ 2909
 Cement Circulated to surface w/ 1200
 sxs. 30' & 300 sxs. Neat.

5 $\frac{1}{2}$ " Casing Jet Perforated
 w/ 4-21 gram shots / foot
 From 5557' to 5670'.

Otis Side Door Choke
 Blanked Off
 @ 6360

Cameron Anchor Type
 Production Packer
 @ 6390

Baker Model "D" Retainer
 Production Packer
 set @ 6400

5 $\frac{1}{2}$ " Casing Cemented @ 6460 w/ 1000 sxs Neat
 Estimated Top Cement 900'

Tubing Perforations

TD - 6610

Detail of Mechanical Equipment To Be
 Installed In Dually Completed Drinkard And
 Blinebry Wells For Submission To Oil
 Conservation Commission