

Form 3160-3
(June 2015)FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: ☐ DRILL ☐ REENTER 1b. Type of Well: ☐ Oil Well ☐ Gas Well ☐ Other 1c. Type of Completion: ☐ Hydraulic Fracturing ☐ Single Zone ☐ Multiple Zone		5. Lease Serial No. 6. If Indian, Allottee or Tribe Name 7. If Unit or CA Agreement, Name and No. 8. Lease Name and Well No. 9. API Well No. 30 015 47664
2. Name of Operator		10. Field and Pool, or Exploratory
3a. Address	3b. Phone No. (include area code)	11. Sec., T. R. M. or Blk. and Survey or Area
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface At proposed prod. zone		12. County or Parish
14. Distance in miles and direction from nearest town or post office*		13. State
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)	16. No of acres in lease	17. Spacing Unit dedicated to this well
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.	19. Proposed Depth	20. BLM/BIA Bond No. in file
21. Elevations (Show whether DF, KDB, RT, GL, etc.)	22. Approximate date work will start*	23. Estimated duration
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

25. Signature	Name (Printed/Typed)	Date
Title		
Approved by (Signature)	Name (Printed/Typed)	Date
Title		
Office		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system
Will require a directional survey with the C-104

Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string

SL

(Continued on page 2)

KP 11/10/2020 GEO Review

*(Instructions on page 2)

APPROVED WITH CONDITIONS

Approval Date: 11/02/2020

Entered - KMS NMOCD

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

1 API Number 30-015 47664	2 Pool Code 98220	3 Pool Name Purple Sage; Wolfcamp (60s)
4 Property Code 329794	5 Property Name CABO WABO FEDERAL COM	
7 OGRID No. 217955	8 Operator Name COG PRODUCTION LLC	6 Well Number 702H
		9 Elevation 3146'

10 Surface Location									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	24	25-S	29-E		210'	NORTH	910'	EAST	EDDY

11 Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	25	25-S	29-E		200'	SOUTH	1310'	EAST	EDDY

12 Dedicated Acres 640	13 Joint or Infill	14 Consolidation Code	15 Order No.
----------------------------------	--------------------	-----------------------	--------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

	CORNER DATA NEW MEXICO EAST - NAD 83 A - FOUND IRON PIPE W/ BRASS CAP N:408605.21' E:661074.26' B - FOUND IRON PIPE W/ BRASS CAP N:408628.83' E:663731.32' C - FOUND IRON PIPE W/ BRASS. CAP N:408652.38' E:666389.05' D - FOUND IRON PIPE W/ BRASS CAP N:405993.34' E:666406.44' E - FOUND IRON PIPE W/ BRASS CAP N:403335.51' E:666423.34' F - FOUND IRON PIPE W/ BRASS CAP N:403316.17' E:663755.92' G - FOUND IRON PIPE W/ BRASS CAP N:403297.54' E:661087.89' H - FOUND IRON PIPE W/ BRASS CAP N:405951.58' E:661081.14' I - FOUND IRON PIPE W/ BRASS CAP N:400678.65' E:666440.96' J - FOUND BENT IRON PIPE W/ BRASS CAP N:398021.31' E:666458.45' K - FOUND IRON PIPE W/ BRASS CAP N:398004.27' E:663799.25' L - FOUND 5/8" IRON ROD N:397988.59' E:661140.90' M - FOUND IRON PIPE W/ BRASS CAP N:400643.27' E:661114.85'	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. <i>Stan Wagner</i> 6/1/20 Signature Date Stan Wagner Printed Name E-mail Address	
	SURFACE HOLE LOCATION (SHL) NEW MEXICO EAST - NAD 83 X=665480.43 Y=408434.25 LAT.= 32.12222978° N LONG.= 103.9332540° W 210' FNL, 910' FEL SECTION 24	FIRST TAKE POINT (FTP) NEW MEXICO EAST - NAD 83 X=665081.25 Y=408310.78 LAT.= 32.12189445° N LONG.= 103.93361626° W 330' FNL, 1310' FEL SECTION 24	18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.
	LAST TAKE POINT (LTP) NEW MEXICO EAST - NAD 83 X=665146.31 Y=398342.91 LAT.= 32.09449319° N LONG.= 103.93352555° W 330' FSL, 1310' FEL SECTION 25	BOTTOM HOLE LOCATION (BHL) NEW MEXICO EAST - NAD 83 X=665147.16 Y=398212.91 LAT.= 32.09413584° N LONG.= 103.93352434° W 200' FSL, 1310' FEL SECTION 25	Date of Survey 05/22/2020 Signature and Seal of Professional Surveyor GABRIEL J. SMELIER NEW MEXICO 25036 PROFESSIONAL SURVEYOR
	Certificate Number		

Intent ☒ As Drilled ☐

API #
30-015-

Operator Name:	Property Name:	Well Number
COG Production LLC	Cabo Wabo Federal Com	702H

Kick Off Point (KOP)

UL A	Section 24	Township 25S	Range 29E	Lot	Feet	From N/S	Feet	From E/W	County Eddy
Latitude					Longitude				NAD 83

First Take Point (FTP)

UL A	Section 24	Township 25S	Range 29E	Lot	Feet 330	From N/S North	Feet 1310	From E/W East	County Eddy
Latitude 32.12189445					Longitude -103.93361626				NAD NAD 83

Last Take Point (LTP)

UL P	Section 25	Township 25S	Range 29E	Lot	Feet 330	From N/S South	Feet 1310	From E/W East	County Eddy
Latitude 32.09449319					Longitude -103.93352555				NAD NAD 83

Is this well the defining well for the Horizontal Spacing Unit? ☒

Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #			
Operator Name:	Property Name:	Well Number	

KZ 06/29/2018

Additional Operator Remarks

Location of Well

0. SHL: NENE / 210 FNL / 910 FEL / TWSP: 25S / RANGE: 29E / SECTION: 24 / LAT: 32.1222297 / LONG: -103.9323254 (TVD: 0 feet, MD: 0 feet)

PPP: NENE / 330 FNL / 1310 FEL / TWSP: 25S / RANGE: 29E / SECTION: 24 / LAT: 32.1218944 / LONG: -103.9336162 (TVD: 10585 feet, MD: 10651 feet)

BHL: SESE / 200 FSL / 1310 FEL / TWSP: 25S / RANGE: 29E / SECTION: 25 / LAT: 32.0941358 / LONG: -103.9335243 (TVD: 10753 feet, MD: 20639 feet)

BLM Point of Contact

Name: Gavin Mickwee

Title: Land Law Examiner

Phone: (575) 234-5972

Email: gmickwee@blm.gov

CONFIDENTIAL

Pecos District
Application for Permit to Drill
Conditions of Approval

Geology Concerns

Potash	☒ None	☐ Secretary	☐ R-111-P
Cave/Karst	☐ Medium	☐ High	☐ Critical
H2S	☐ None	☐ Below 100 PPM	☐ Above 100 PPM
Other	☐ 4 String Area	☐ Capitan Reef	☐ SWD Well

Note: The geology of the area where the well is being drilled determines the COAs that apply, not the above table.

Additional Engineering Requirements

Surface casing must be set at: 825'

General Requirements

1. Changes to the approved APD casing program need prior approval.
2. The Bureau of Land Management (BLM) will be notified in advance to witness:
 - a. Well spudding (minimum 24 hours notice)
 - b. Setting and cementing of all casing strings (minimum 4 hours notice)
 - c. BOPE tests (minimum 4 hours notice)

Eddy County

620 East Greene Street, Carlsbad, NM 88220
(575) 361-2822

Lea County

414 West Taylor, Hobbs, NM 88240
(575) 393-3612

3. The initial wellhead installed on the well will remain on the well with spools used as needed.
4. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig:

- i. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with a Spudder Rig:
 - i. Notify the BLM when moving in and removing the Spudder Rig.
 - ii. Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - iii. BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
5. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller, and will always be operational during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the doghouse or stairway area.
6. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

Pressure Control

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. 5M or higher system requires an HCR valve, remote kill line, and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
3. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE, and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
 - b. The results of the test shall be reported to the appropriate BLM office.
 - c. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.

- d. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
 - e. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.
 - f. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - g. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, no tests shall commence until the cement has had a minimum of 24 hours setup time.
 - h. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
4. If the operator has proposed using a 5,000 (5M) Annular on a 10M BOP:
- a. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 10,000 (10M) psi.
5. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
- a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.

- c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
6. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply:
- a. The flex line must meet the requirements of API 16C.
 - b. Check condition of flexible line from BOP to choke manifold (replace if exterior is damaged or if line fails test).
 - c. Line is to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements.
 - d. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating.
 - e. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.

Casing and Cement

1. Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.).
2. On any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. The formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
3. Provide compressive strengths (including hours to reach required 500 pounds compressive strength) prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
4. The surface casing shall be set at a minimum of 25 feet into the Rustler Anhydrite and 80 feet above the salt and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. Wait on cement (WOC) time for a primary cement job will be a minimum of 8 hours (or 24 hours in the Potash Area) or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
- 5. Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.
- 6. Intermediate casing must be cemented to surface. For medium/high cave/karst, potash, and Capitan Reef, wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.
- 7. The production cement should tie-back at least 200 feet (500 feet in Secretary Potash, surface in R-111-P potash) into previous casing string. Operator shall provide method of verification.
- 8. Production liner cement should tie-back at least 100 feet into previous casing string. Operator shall provide verification of cement top.
- 9. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- 10. No pea gravel permitted for remedial cement or fall back remedial cement without prior authorization from a BLM petroleum engineer.
- 11. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
- 12. DV tools:
 - a. First stage to DV tool (The DV tool may be cancelled if cement circulates to surface on the first stage):
 - i. Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
 - b. Second stage above DV tool:
 - i. For intermediate casing, cement to surface.

- ii. For production casing, cement should tie-back at least 200 feet (500 feet in Secretary Potash, surface in R-111-P potash) into previous casing string. Operator shall provide method of verification.
- iii. If cement does not circulate, contact the appropriate BLM office.

13. Wait on cement (WOC) for Potash Areas:

- a. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.
- b. After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met:
 - i. Cement reaches a minimum compressive strength of 500 psi for all cement blends
 - ii. Until cement has been in place at least 24 hours.
- c. WOC time will be recorded in the driller's log.
- d. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

14. Wait on cement (WOC) for Water Basin:

- a. After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met:
 - i. Cement reaches a minimum compressive strength of 500 psi at the shoe
 - ii. Until cement has been in place at least 8 hours.
- b. WOC time will be recorded in the driller's log.

15. Wait on cement (WOC) for Medium and High Cave/Karst Areas:

- a. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.

16. If cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.

Drilling Mud

- 1. Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

Waste Material and Fluids

- 1. All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

2. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

Special Requirements

1. Communitization Agreement
 - a. The operator will submit a Communitization Agreement to the Carlsbad Field Office (620 E Greene St. Carlsbad, New Mexico 88220), at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division.
 - b. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
 - i. If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
 - c. In addition, the well sign shall include the surface and bottom hole lease numbers.
 - i. When the Communitization Agreement number is known, it shall also be on the sign.
2. Unit Wells
 - a. The well sign for a unit well shall include the unit number in addition to the surface and bottom hole lease numbers. This also applies to participating area numbers.
 - i. If a participating area has not been established, the operator can use the general unit designation, but will replace the unit number with the participating area number when the sign is replaced.
 - b. Commercial Well Determination
 - i. A commercial well determination shall be submitted after production has been established for at least six months (this is not necessary for secondary recovery unit wells).
3. Hydrogen Sulfide (H₂S)
 - a. If H₂S is encountered, provide measured values and formations to the BLM.
 - b. An H₂S area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items.
 - c. An H₂S Drilling Plan shall be activated 500 feet prior to drilling into the any formation designated as having H₂S.

- d. Hydrogen Sulfide monitors shall be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items.

4. Capitan Reef

- a. If lost circulation (50% or greater) occurs below the Base of the Salt, the operator shall do the following (Use this for 3 string wells in the Capitan Reef, if 4 string well ensure fresh water based mud used across the Capitan interval):
 - i. Switch to fresh water mud to protect the Capitan Reef and use fresh water mud until setting the intermediate casing. The appropriate BLM office is to be notified for a PET to witness the switch to fresh water.
 - ii. Daily drilling reports from the Base of the Salt to the setting of the intermediate casing are to be submitted to the BLM CFO engineering staff via e-mail by 0800 hours each morning. Any lost circulation encountered is to be recorded on these drilling reports.
 - iii. The daily drilling report should show mud volume per shift/tour.
 - iv. Failure to submit these reports will result in an Incidence of Non-Compliance being issued for failure to comply with the Conditions of Approval.
 - v. If not already planned, the operator shall run a caliper survey for the intermediate well bore and submit to the appropriate BLM office.

5. Salt Water Disposal Wells

- a. The operator shall supply the BLM with a copy of a mudlog over the permitted disposal interval and estimated in situ water salinity based on open-hole logs.
- b. If hydrocarbons are encountered while drilling, the operator shall notify the BLM.
- c. The operator shall provide to the BLM a summary of formation depth picks based on mudlog and geophysical logs along with a copy of the mudlog and open-hole logs from total depth to top of Devonian.
- d. An NOI sundry with the completion procedure for this well shall be submitted and approved prior to commencing completion work. The procedure will be reviewed to verify that the completion proposal will allow the operator to:
 - i. Properly evaluate the injection zone utilizing open-hole logs, swab testing and/or any other method to confirm that hydrocarbons cannot be produced in paying quantities. This evaluation shall be reviewed by the BLM prior to injection commencing.
 - ii. Restrict the injection fluid to the approved formation.
 - iii. If a step rate test will be run, an NOI sundry shall be submitted to the BLM for approval.
- e. If off-lease water will be disposed in this well, the operator shall provide proof of right-of-way approval.

COG Operating, LLC - Cabo Wabo Federal Com 702H

1. Geologic Formations

TVD of target	10,753' EOL	Pilot hole depth	NA
MD at TD:	20,639'	Deepest expected fresh water:	65'

Formation	Depth (TVD) from KB	Water/Mineral Bearing/ Target Zone?	Hazards*
Quaternary Fill	Surface	Water	
Rustler	1015	Water	
Top of Salt	1199	Salt	
Base of Salt	3272	Salt	
Lamar	3471	Salt Water	
Bell Canyon	3499	Salt Water	
Cherry Canyon	4358	Oil/Gas	
Brushy Canyon	5638	Oil/Gas	
Bone Spring Lime	7198	Oil/Gas	
1st Bone Spring Sand	8152	Oil/Gas	
2nd Bone Spring Sand	8996	Oil/Gas	
3rd Bone Spring Sand	10069	Oil/Gas	
Wolfcamp	10433	Target Oil/Gas	
Wolfcamp B	10910	Not Penetrated	
Wolfcamp C	11195	Not Penetrated	

2. Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Body	SF Joint
	From	To								
14.75"	0	1170	10.75"	45.5	N80	BTC	4.61	1.67	19.54	20.61
9.875"	0	8500	7.625"	29.7	HCL80	BTC	1.56	1.24	2.88	2.90
8.750"	8500	10050	7.625"	29.7	HCP110	TL-FJ	1.50	1.28	3.15	2.20
6.75"	0	9850	5.5"	20	P110	BTC	1.59	2.14	2.98	3.10
6.75"	9850	20,639	5.5"	20	P110	SF	1.59	2.14	2.98	3.10
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Surface burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface and
All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

The 5" casing will be run back 200' into the intermediate casing to ensure the coupling OD clearance is greater than .422" for the cement bond tie in.

COG Operating, LLC - Cabo Wabo Federal Com 702H

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	Y
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary?	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

COG Operating, LLC - Cabo Wabo Federal Com 702H

3. Cementing Program

Casing	# Sks	Wt. lb/ gal	Yld ft ³ / sack	H ₂ O gal/sk	500# Comp. Strength (hours)	Slurry Description
Surf.	558	13.5	1.75	9	12	Lead: Class C + 4% Gel + 1% CaCl ₂
	250	14.8	1.34	6.34	8	Tail: Class C + 2% CaCl ₂
Inter. Stage 1	770	10.3	3.3	22	24	Halliburton tunded light
	250	14.8	1.35	6.6	8	Tail: Class H
Prod	457	12.7	2	10.7	72	Lead: 50:50:10 H Blend
	1017	14.4	1.24	5.7	19	Tail: 50:50:2 Class H Blend

If losses are encountered in the intermediate section a DV/ECP tool will be run ~50' above the Lamar Lime top, cement will be adjusted accordingly if this contingency is necessary.

Volumes Subject to Observed Hole Conditions and/or Fluid Caliper Results

Lab reports with the 500 psi compressive strength time for the cement will be onsite for review.

Casing String	TOC	% Excess
Surface	0'	50%
1 st Intermediate	0'	50%
Production	8,000'	35% OH in Lateral (KOP to EOL)

4. Pressure Control Equipment

N	A variance is requested for the use of a diverter on the surface casing. See attached for schematic.
---	---

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	x	Tested to:
9-7/8"	13-5/8"	5M	Annular	x	2500psi
			Blind Ram	x	5000psi
			Pipe Ram	x	
			Double Ram	x	
			Other*		
6-3/4"	13-5/8"	10M	5M Annular	x	5000psi
			Blind Ram	x	10000psi
			Pipe Ram	x	
			Double Ram	x	
			Other*		

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

Y	Formation integrity test will be performed per Onshore Order #2.
Y	On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.
Y	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
N	Are anchors required by manufacturer?
Y	A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.

5. Mud Program

Depth		Type	Weight (ppg)	Viscosity	Water Loss
From	To				
0	Surf. Shoe	FW Gel	8.6 - 8.8	28-34	N/C
Surf csg	9-5/8" Int shoe	Brine Diesel Emulsion	8.4 - 9	28-34	N/C
7-5/8" Int shoe	Lateral TD	OBM	9.6 - 12.5	35-45	<20

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing.	
Y	Will run GR/CNL from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
Y	No Logs are planned based on well control or offset log information.
N	Drill stem test? If yes, explain.
N	Coring? If yes, explain.

Additional logs planned		Interval
N	Resistivity	Pilot Hole TD to ICP
N	Density	Pilot Hole TD to ICP
Y	CBL	Production casing (If cement not circulated to surface)
Y	Mud log	Intermediate shoe to TD
N	PEX	

COG Operating, LLC - Cabo Wabo Federal Com 702H

7. Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	6990 psi at 10753' TVD
Abnormal Temperature	NO 165 Deg. F.

No abnormal pressure or temperature conditions are anticipated. Sufficient mud materials to maintain mud properties and weight increase requirements will be kept on location at all times.

Sufficient supplies of Paper/LCM for periodic sweeps to control seepage and losses will be maintained on location.

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.	
N	H2S is present
Y	H2S Plan attached


8. Other Facets of Operation

Y	Is it a walking operation?
Y	Is casing pre-set?

x	H2S Plan.
x	BOP & Choke Schematics.
x	Directional Plan

COG Operating LLC
H₂S Equipment Schematic
Terrain: Shinnery sand hills.

Well pad will be 400' x 400'
with cellar in center of pad

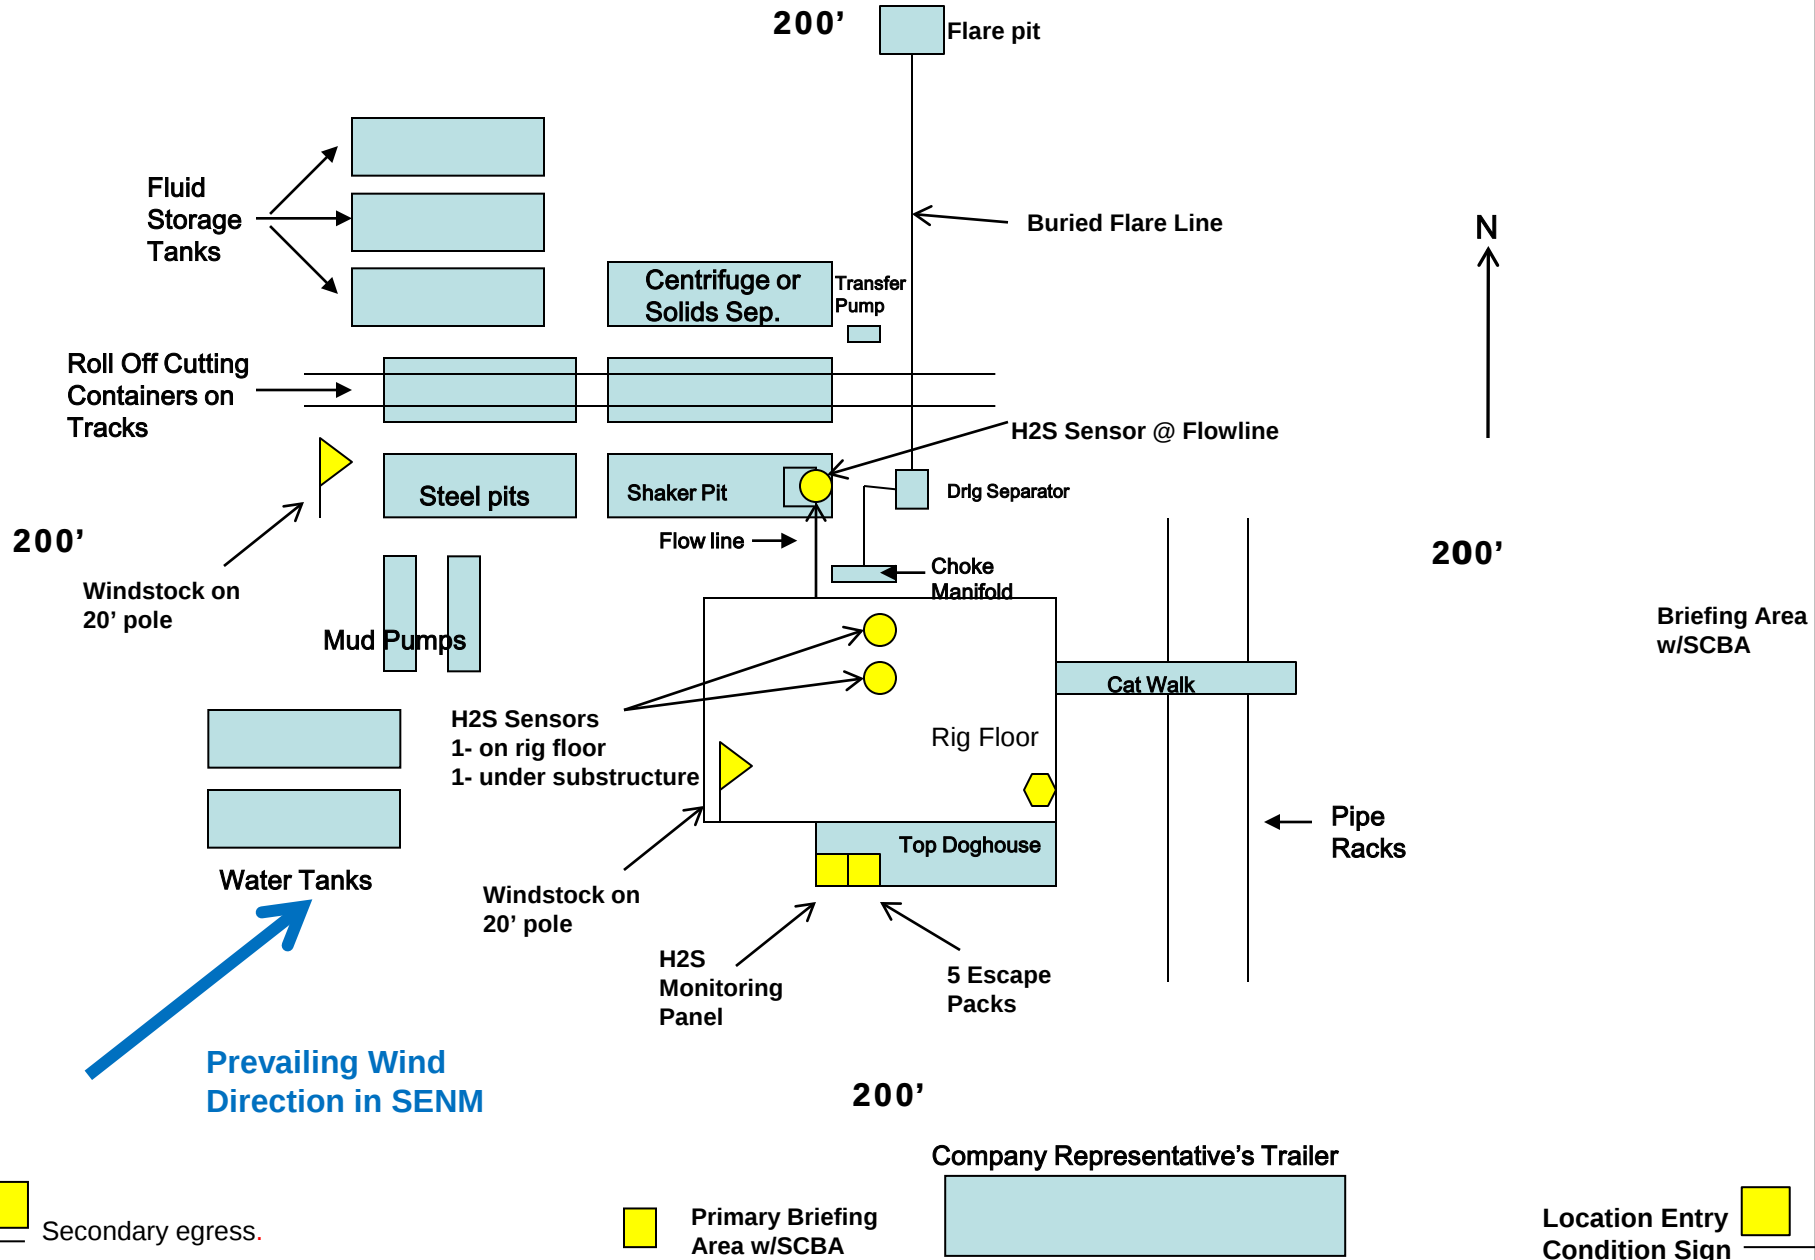

COG OPERATING LLC
HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. HYDROGEN SULFIDE TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- a. The hazards and characteristics of hydrogen sulfide (H₂S).
- b. The proper use and maintenance of personal protective equipment and life support systems.
- c. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
- d. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- a. The effects of H₂S on metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
- b. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
- c. The contents and requirements of the H₂S Drilling Operations Plan and the Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received the proper training.

2. H₂S SAFETY EQUIPMENT AND SYSTEMS

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S. If H₂S greater than 100 ppm is encountered in the gas stream we will shut in and install H₂S equipment.

- a. Well Control Equipment:
 - Flare line.
 - Choke manifold with remotely operated choke.
 - Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.
 - Auxiliary equipment to include: annular preventer, mud-gas separator, rotating head.

- b. Protective equipment for essential personnel:
Mark II Surviveair 30-minute units located in the dog house and at briefing areas.
- c. H2S detection and monitoring equipment:
2 - portable H2S monitor positioned on location for best coverage and response. These units have warning lights and audible sirens when H2S levels of 20 ppm are reached.
- d. Visual warning systems:
Caution/Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate. See example attached.
- e. Mud Program:
The mud program has been designed to minimize the volume of H2S circulated to the surface.
- f. Metallurgy:
All drill strings, casings, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
- g. Communication:
Company vehicles equipped with cellular telephone.

COG OPERATING LLC has conducted a review to determine if an H2S contingency plan is required for the above referenced well. We were able to conclude that any potential hazardous volume would be minimal. H2S concentrations of wells in this area from surface to TD are low enough; therefore, we do not believe that an H2S contingency plan is necessary.

W A R N I N G

**YOU ARE ENTERING AN H₂S AREA
AUTHORIZED PERSONNEL ONLY**

- 1. BEARDS OR CONTACT LENSES NOT ALLOWED***
- 2. HARD HATS REQUIRED***
- 3. SMOKING IN DESIGNATED AREAS ONLY***
- 4. BE WIND CONSCIOUS AT ALL TIMES***
- 5. CK WITH COG OPERATING LLC FOREMAN AT MAIN OFFICE***

COG OPERATING LLC

1-575-748-6940

EMERGENCY CALL LIST

	<u>OFFICE</u>	<u>MOBILE</u>
COG OPERATING LLC OFFICE	575-748-6940	
SETH WILD	432-683-7443	432-528-3633
WALTER ROYE	575-748-6940	432-934-1886

EMERGENCY RESPONSE NUMBERS

	<u>OFFICE</u>
STATE POLICE	575-748-9718
EDDY COUNTY SHERIFF	575-746-2701
EMERGENCY MEDICAL SERVICES (AMBULANCE)	911 or 575-746-2701
EDDY COUNTY EMERGENCY MANAGEMENT (HARRY BURGESS)	575-887-9511
STATE EMERGENCY RESPONSE CENTER (SERC)	575-476-9620
CARLSBAD POLICE DEPARTMENT	575-885-2111
CARLSBAD FIRE DEPARTMENT	575-885-3125
NEW MEXICO OIL CONSERVATION DIVISION	575-748-1283
INDIAN FIRE & SAFETY	800-530-8693
HALLIBURTON SERVICES	800-844-8451

DELAWARE BASIN WEST

ATLAS PROSPECT (NM-E)

CABO WABO FEDERAL PROJECT (ATLAS 2529)

CABO WABO FED COM #702H

OWB

PWP2

Anticollision Report

26 May, 2020

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Reference	PWP2
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria
Interpolation Method:	Stations
Depth Range:	Unlimited
Results Limited by:	Maximum ellipse separation of 1,000.0 usft
Warning Levels Evaluated at:	2.00 Sigma
Error Model:	ISCWSA
Scan Method:	Closest Approach 3D
Error Surface:	Pedal Curve
Casing Method:	Not applied

Survey Tool Program		Date	5/26/2020		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
0.0	20,639.0	PWP2 (OWB)	MWD+IFR1+FDIR	OWSG MWD + IFR1 + FDIR Correction	

Summary						
Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Offset Well - Wellbore - Design						
CABO WABO FEDERAL PROJECT (ATLAS 2529)						
CABO WABO FED COM #501H - OWB - PWP0	5,974.9	5,986.6	104.1	61.5	2.441	CC
CABO WABO FED COM #501H - OWB - PWP0	6,000.0	6,011.4	104.2	61.4	2.433	ES, SF
CABO WABO FED COM #502H - OWB - PWP0	2,414.2	2,421.2	352.6	334.7	19.700	CC
CABO WABO FED COM #502H - OWB - PWP0	2,500.0	2,506.5	352.6	334.1	19.083	ES
CABO WABO FED COM #502H - OWB - PWP0	8,700.0	8,658.6	550.0	488.6	8.960	SF
CABO WABO FED COM #701H - OWB - PWP1	2,416.3	2,417.3	30.0	12.1	1.673	Advise and Monitor, CC
CABO WABO FED COM #701H - OWB - PWP1	2,500.0	2,501.0	30.0	11.5	1.622	Advise and Monitor, ES, SF
CABO WABO FED COM #703H - OWB - PWP1	2,500.0	2,500.0	29.9	17.2	2.360	CC, ES, SF
CABO WABO FED COM #704H - OWB - PWP1						Out of range
CABO WABO FED COM #705H - OWB - PWP2						Out of range
CABO WABO FED COM #706H - OWB - PWP1						Out of range
CABO WABO FED COM #801H - OWB - PWP0	6,964.4	6,966.4	69.4	36.5	2.111	CC
CABO WABO FED COM #801H - OWB - PWP0	7,000.0	7,001.5	69.7	36.4	2.097	ES, SF
CABO WABO FED COM #802H - OWB - PWP0	10,087.7	10,080.9	249.1	177.6	3.482	CC
CABO WABO FED COM #802H - OWB - PWP0	10,200.0	10,192.9	249.3	176.9	3.446	ES, SF
CABO WABO FED COM #803H - OWB - PWP0	2,416.0	2,418.0	290.0	272.1	16.197	CC
CABO WABO FED COM #803H - OWB - PWP0	2,500.0	2,500.0	290.0	271.5	15.705	ES
CABO WABO FED COM #803H - OWB - PWP0	10,250.0	10,212.4	621.5	549.0	8.565	SF
CABO WABO FED COM #804H - OWB - PWP0						Out of range

CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #501H - OWB - PWP0											Offset Site Error:		3.0 usft
Survey Program: 0-MWD+IFR1+FDIR											Offset Well Error:		3.0 usft
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
0.0	0.0	1.0	1.0	3.0	3.0	-128.01	-202.1	-258.6	328.2				
100.0	100.0	101.0	101.0	3.0	3.0	-128.01	-202.1	-258.6	328.2	322.2	6.01	54.651	
200.0	200.0	201.0	201.0	3.0	3.0	-128.01	-202.1	-258.6	328.2	322.1	6.08	53.992	
300.0	300.0	301.0	301.0	3.1	3.1	-128.01	-202.1	-258.6	328.2	322.0	6.23	52.645	
400.0	400.0	401.0	401.0	3.2	3.2	-128.01	-202.1	-258.6	328.2	321.7	6.47	50.759	
500.0	500.0	501.0	501.0	3.4	3.4	-128.01	-202.1	-258.6	328.2	321.4	6.77	48.508	
600.0	600.0	601.0	601.0	3.6	3.6	-128.01	-202.1	-258.6	328.2	321.1	7.13	46.058	
700.0	700.0	701.0	701.0	3.8	3.8	-128.01	-202.1	-258.6	328.2	320.7	7.54	43.547	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #501H - OWB - PWP0													Offset Site Error:	3.0 usft
Survey Program: 0-MWD+IFR1+FDIR													Offset Well Error:	3.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Semi Major Axis	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
800.0	800.0	801.0	801.0	4.0	4.0	-128.01	-128.01	-202.1	-258.6	328.2	320.2	7.99	41.071	
900.0	900.0	901.0	901.0	4.2	4.2	-128.01	-128.01	-202.1	-258.6	328.2	319.7	8.48	38.695	
1,000.0	1,000.0	1,001.0	1,001.0	4.5	4.5	-128.01	-128.01	-202.1	-258.6	328.2	319.2	9.00	36.456	
1,100.0	1,100.0	1,101.0	1,101.0	4.8	4.8	-128.01	-128.01	-202.1	-258.6	328.2	318.7	9.55	34.370	
1,200.0	1,200.0	1,201.0	1,201.0	5.1	5.1	-128.01	-128.01	-202.1	-258.6	328.2	318.1	10.12	32.441	
1,300.0	1,300.0	1,301.0	1,301.0	5.4	5.4	-128.01	-128.01	-202.1	-258.6	328.2	317.5	10.70	30.665	
1,400.0	1,400.0	1,401.0	1,401.0	5.7	5.7	-128.01	-128.01	-202.1	-258.6	328.2	316.9	11.30	29.035	
1,500.0	1,500.0	1,501.0	1,501.0	6.0	6.0	-128.01	-128.01	-202.1	-258.6	328.2	316.3	11.92	27.540	
1,600.0	1,600.0	1,601.0	1,601.0	6.3	6.3	-128.01	-128.01	-202.1	-258.6	328.2	315.7	12.54	26.169	
1,700.0	1,700.0	1,701.0	1,701.0	6.6	6.6	-128.01	-128.01	-202.1	-258.6	328.2	315.0	13.18	24.909	
1,800.0	1,800.0	1,801.0	1,801.0	6.9	6.9	-128.01	-128.01	-202.1	-258.6	328.2	314.4	13.82	23.752	
1,900.0	1,900.0	1,901.0	1,901.0	7.2	7.2	-128.01	-128.01	-202.1	-258.6	328.2	313.7	14.47	22.686	
2,000.0	2,000.0	2,001.0	2,001.0	7.6	7.6	-128.01	-128.01	-202.1	-258.6	328.2	313.1	15.12	21.703	
2,100.0	2,100.0	2,101.0	2,101.0	7.9	7.9	-128.01	-128.01	-202.1	-258.6	328.2	312.4	15.78	20.795	
2,200.0	2,200.0	2,201.0	2,201.0	8.2	8.2	-128.01	-128.01	-202.1	-258.6	328.2	311.8	16.45	19.953	
2,300.0	2,300.0	2,301.0	2,301.0	8.6	8.6	-128.01	-128.01	-202.1	-258.6	328.2	311.1	17.12	19.173	
2,400.0	2,400.0	2,401.0	2,401.0	8.9	8.9	-128.01	-128.01	-202.1	-258.6	328.2	310.4	17.79	18.448	
2,500.0	2,500.0	2,501.1	2,501.1	9.2	9.2	-128.01	-128.01	-202.1	-258.6	328.2	309.7	18.47	17.771	
2,600.0	2,600.0	2,613.3	2,613.3	9.6	9.6	-128.14	-128.14	-201.4	-256.5	326.3	307.1	19.17	17.021	
2,700.0	2,700.0	2,725.1	2,724.9	9.9	10.0	-128.50	-128.50	-199.1	-250.3	320.7	300.9	19.85	16.159	
2,800.0	2,800.0	2,826.1	2,825.5	10.3	10.3	-128.99	-128.99	-196.3	-242.5	312.9	292.4	20.52	15.249	
2,900.0	2,900.0	2,925.7	2,924.8	10.6	10.7	-129.49	-129.49	-193.4	-234.7	305.1	283.9	21.20	14.393	
3,000.0	3,000.0	3,025.4	3,024.1	10.9	11.0	-130.03	-130.03	-190.6	-226.9	297.3	275.4	21.88	13.589	
3,100.0	3,100.0	3,125.1	3,123.5	11.3	11.3	-130.59	-130.59	-187.8	-219.2	289.5	266.9	22.56	12.834	
3,200.0	3,200.0	3,224.7	3,222.8	11.6	11.7	-131.18	-131.18	-185.0	-211.4	281.8	258.5	23.24	12.123	
3,300.0	3,300.0	3,324.4	3,322.1	12.0	12.0	-131.81	-131.81	-182.1	-203.7	274.1	250.1	23.93	11.453	
3,400.0	3,400.0	3,424.0	3,421.4	12.3	12.3	-132.47	-132.47	-179.3	-195.9	266.4	241.8	24.62	10.821	
3,500.0	3,500.0	3,523.7	3,520.7	12.7	12.7	-133.17	-133.17	-176.5	-188.2	258.7	233.4	25.31	10.224	
3,600.0	3,600.0	3,623.3	3,620.0	13.0	13.0	-133.91	-133.91	-173.7	-180.4	251.1	225.1	26.00	9.660	
3,700.0	3,700.0	3,723.0	3,719.3	13.4	13.4	-134.70	-134.70	-170.9	-172.7	243.6	216.9	26.69	9.125	
3,800.0	3,800.0	3,822.7	3,818.7	13.7	13.7	-135.54	-135.54	-168.0	-164.9	236.1	208.7	27.39	8.620	
3,900.0	3,900.0	3,922.3	3,918.0	14.1	14.1	-136.43	-136.43	-165.2	-157.1	228.6	200.6	28.09	8.141	
4,000.0	4,000.0	4,022.0	4,017.3	14.4	14.4	-137.39	-137.39	-162.4	-149.4	221.3	192.5	28.79	7.686	
4,100.0	4,100.0	4,121.6	4,116.6	14.8	14.8	-138.41	-138.41	-159.6	-141.6	213.9	184.4	29.48	7.256	
4,200.0	4,200.0	4,221.3	4,215.9	15.1	15.1	-139.50	-139.50	-156.7	-133.9	206.7	176.5	30.19	6.847	
4,300.0	4,300.0	4,320.9	4,315.2	15.5	15.5	-140.67	-140.67	-153.9	-126.1	199.5	168.6	30.89	6.459	
4,400.0	4,400.0	4,420.6	4,414.5	15.8	15.8	-141.92	-141.92	-151.1	-118.4	192.4	160.8	31.59	6.091	
4,500.0	4,500.0	4,520.2	4,513.9	16.2	16.2	-143.27	-143.27	-148.3	-110.6	185.4	153.1	32.30	5.742	
4,600.0	4,600.0	4,619.9	4,613.2	16.5	16.5	-144.73	-144.73	-145.5	-102.9	178.6	145.6	33.00	5.411	
4,700.0	4,700.0	4,719.6	4,712.5	16.9	16.9	-146.30	-146.30	-142.6	-95.1	171.8	138.1	33.71	5.097	
4,800.0	4,800.0	4,819.2	4,811.8	17.2	17.2	-148.00	-148.00	-139.8	-87.4	165.2	130.8	34.41	4.800	
4,900.0	4,900.0	4,918.9	4,911.1	17.6	17.6	-149.84	-149.84	-137.0	-79.6	158.8	123.6	35.12	4.520	
5,000.0	5,000.0	5,018.5	5,010.4	17.9	17.9	-151.83	-151.83	-134.2	-71.8	152.5	116.6	35.83	4.255	
5,100.0	5,100.0	5,118.2	5,109.7	18.3	18.3	-153.99	-153.99	-131.3	-64.1	146.4	109.9	36.54	4.006	
5,200.0	5,200.0	5,217.8	5,209.1	18.7	18.6	-156.33	-156.33	-128.5	-56.3	140.6	103.3	37.25	3.773	
5,300.0	5,300.0	5,317.5	5,308.4	19.0	19.0	-158.87	-158.87	-125.7	-48.6	135.0	97.0	37.96	3.555	
5,400.0	5,400.0	5,417.2	5,407.7	19.4	19.3	-161.62	-161.62	-122.9	-40.8	129.6	91.0	38.68	3.352	
5,500.0	5,500.0	5,516.8	5,507.0	19.7	19.7	-164.60	-164.60	-120.0	-33.1	124.7	85.3	39.39	3.165	
5,600.0	5,600.0	5,616.3	5,606.1	20.1	20.0	-63.64	-63.64	-117.2	-25.3	119.3	79.2	40.09	2.975	
5,700.0	5,699.8	5,715.4	5,704.9	20.4	20.4	-69.66	-69.66	-114.4	-17.6	113.2	72.4	40.78	2.776	
5,730.0	5,729.8	5,745.0	5,734.4	20.5	20.5	-71.90	-71.90	-113.6	-15.3	111.4	70.5	40.99	2.719	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #501H - OWB - PWP0													Offset Site Error:	3.0 usft
Survey Program: 0-MWD+IFR1+FDIR													Offset Well Error:	3.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Semi Major Axis	Highside Toolface (°)	Offset Wellbore Centre	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
								+N/-S (usft)	+E/-W (usft)					
5,800.0	5,799.5	5,814.1	5,803.2	20.7	20.7	-77.49		-111.6	-9.9	107.9	66.4	41.47	2.602	
5,900.0	5,899.2	5,912.8	5,901.6	21.1	21.1	-85.97		-108.8	-2.3	104.8	62.7	42.15	2.487	
5,974.9	5,973.8	5,986.6	5,975.2	21.3	21.4	-92.54		-106.7	3.5	104.1	61.5	42.66	2.441 CC	
6,000.0	5,998.9	6,011.4	5,999.9	21.4	21.5	-94.76		-106.0	5.4	104.2	61.4	42.83	2.433 ES, SF	
6,100.0	6,098.6	6,110.1	6,098.3	21.7	21.8	-103.44		-103.2	13.1	106.1	62.6	43.50	2.438	
6,200.0	6,198.2	6,208.8	6,196.6	22.1	22.2	-111.65		-100.5	20.8	110.3	66.2	44.17	2.498	
6,300.0	6,297.9	6,307.5	6,294.9	22.4	22.5	-119.12		-97.7	28.4	116.7	71.9	44.84	2.603	
6,400.0	6,397.6	6,406.1	6,393.3	22.8	22.9	-125.73		-94.9	36.1	124.9	79.4	45.51	2.744	
6,500.0	6,497.3	6,504.8	6,491.6	23.1	23.2	-131.48		-92.1	43.8	134.5	88.4	46.18	2.913	
6,600.0	6,597.0	6,603.5	6,589.9	23.4	23.6	-136.43		-89.3	51.5	145.4	98.5	46.86	3.102	
6,700.0	6,696.6	6,702.2	6,688.3	23.8	23.9	-140.67		-86.5	59.2	157.1	109.6	47.54	3.305	
6,800.0	6,796.3	6,800.8	6,786.6	24.1	24.3	-144.32		-83.7	66.8	169.6	121.4	48.22	3.518	
6,900.0	6,896.0	6,899.5	6,884.9	24.5	24.6	-147.45		-80.9	74.5	182.7	133.8	48.91	3.736	
7,000.0	6,995.7	6,998.2	6,983.3	24.8	25.0	-150.17		-78.1	82.2	196.3	146.7	49.59	3.957	
7,100.0	7,095.3	7,096.8	7,081.6	25.1	25.3	-152.53		-75.3	89.9	210.2	159.9	50.28	4.180	
7,200.0	7,195.0	7,195.5	7,179.9	25.5	25.7	-154.60		-72.5	97.6	224.4	173.5	50.97	4.403	
7,300.0	7,294.7	7,294.2	7,278.3	25.8	26.0	-156.42		-69.7	105.2	238.9	187.3	51.67	4.625	
7,400.0	7,394.4	7,392.9	7,376.6	26.2	26.4	-158.03		-66.9	112.9	253.7	201.3	52.36	4.845	
7,500.0	7,494.1	7,491.5	7,474.9	26.5	26.7	-159.46		-64.1	120.6	268.5	215.5	53.05	5.062	
7,600.0	7,593.7	7,590.2	7,573.3	26.9	27.1	-160.75		-61.3	128.3	283.6	229.8	53.75	5.276	
7,700.0	7,693.4	7,688.9	7,671.6	27.2	27.5	-161.90		-58.5	135.9	298.7	244.3	54.44	5.487	
7,800.0	7,793.1	7,787.6	7,769.9	27.6	27.8	-162.94		-55.7	143.6	314.0	258.9	55.14	5.694	
7,900.0	7,892.8	7,886.2	7,868.3	27.9	28.2	-163.89		-52.9	151.3	329.3	273.5	55.84	5.898	
8,000.0	7,992.4	7,984.9	7,966.6	28.3	28.5	-164.75		-50.1	159.0	344.8	288.3	56.53	6.099	
8,100.0	8,092.1	8,083.6	8,065.0	28.6	28.9	-165.54		-47.4	166.7	360.3	303.1	57.23	6.295	
8,200.0	8,191.8	8,182.3	8,163.3	29.0	29.2	-166.26		-44.6	174.3	375.9	317.9	57.93	6.488	
8,300.0	8,291.5	8,280.9	8,261.6	29.3	29.6	-166.93		-41.8	182.0	391.5	332.9	58.63	6.677	
8,400.0	8,391.2	8,379.6	8,360.0	29.7	29.9	-167.54		-39.0	189.7	407.2	347.8	59.33	6.862	
8,500.0	8,490.8	8,478.3	8,458.3	30.0	30.3	-168.11		-36.2	197.4	422.9	362.8	60.03	7.044	
8,600.0	8,590.5	8,577.6	8,557.3	30.4	30.7	-168.62		-33.5	205.1	438.6	377.9	60.74	7.221	
8,700.0	8,690.2	8,680.5	8,659.3	30.7	31.0	-167.63		-42.4	213.1	453.7	392.3	61.46	7.383	
8,800.0	8,789.9	8,777.9	8,753.0	31.1	31.3	-164.67		-67.6	220.6	468.8	406.8	62.09	7.551	
8,900.0	8,889.5	8,865.3	8,832.4	31.4	31.6	-160.57		-103.4	226.9	486.2	423.7	62.53	7.775	
9,000.0	8,989.2	8,940.8	8,895.9	31.8	31.8	-156.11		-143.9	232.1	508.6	446.0	62.65	8.118	
9,100.0	9,088.9	9,000.0	8,941.7	32.1	31.9	-152.17		-181.2	235.9	538.2	476.0	62.20	8.653	
9,200.0	9,188.6	9,058.0	8,982.5	32.5	32.0	-148.03		-222.2	239.3	576.2	514.7	61.41	9.383	
9,300.0	9,288.3	9,100.0	9,009.4	32.8	32.1	-144.94		-254.3	241.5	622.6	562.6	60.03	10.371	
9,400.0	9,387.9	9,140.0	9,032.8	33.2	32.2	-141.97		-286.6	243.5	676.9	618.4	58.51	11.569	
9,500.0	9,487.6	9,171.5	9,049.6	33.5	32.3	-139.62		-313.3	244.9	738.1	681.3	56.82	12.992	
9,600.0	9,587.3	9,200.0	9,063.5	33.9	32.3	-137.52		-338.1	246.1	805.3	750.1	55.19	14.590	
9,700.0	9,687.0	9,221.3	9,073.1	34.2	32.4	-135.97		-357.1	247.0	877.3	823.7	53.59	16.370	
9,800.0	9,786.6	9,250.0	9,084.9	34.6	32.4	-133.91		-383.3	248.0	953.5	901.1	52.37	18.207	

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #502H - OWB - PWP0													Offset Site Error:	3.0 usft
Survey Program: 0-MWD+IFR1+FDIR													Offset Well Error:	3.0 usft
Reference		Offset		Semi Major Axis		Distance								Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore +N/-S (usft)	Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
0.0	0.0	7.0	7.0	3.0	3.0	-125.06	-202.6	-288.6	352.6					
100.0	100.0	107.0	107.0	3.0	3.0	-125.06	-202.6	-288.6	352.6	346.6	6.01	58.704		
200.0	200.0	207.0	207.0	3.0	3.0	-125.06	-202.6	-288.6	352.6	346.5	6.08	57.984		
300.0	300.0	307.0	307.0	3.1	3.1	-125.06	-202.6	-288.6	352.6	346.3	6.24	56.527		
400.0	400.0	407.0	407.0	3.2	3.2	-125.06	-202.6	-288.6	352.6	346.1	6.47	54.493		
500.0	500.0	507.0	507.0	3.4	3.4	-125.06	-202.6	-288.6	352.6	345.8	6.77	52.071		
600.0	600.0	607.0	607.0	3.6	3.6	-125.06	-202.6	-288.6	352.6	345.5	7.13	49.438		
700.0	700.0	707.0	707.0	3.8	3.8	-125.06	-202.6	-288.6	352.6	345.0	7.54	46.739		
800.0	800.0	807.0	807.0	4.0	4.0	-125.06	-202.6	-288.6	352.6	344.6	8.00	44.081		
900.0	900.0	907.0	907.0	4.2	4.2	-125.06	-202.6	-288.6	352.6	344.1	8.49	41.531		
1,000.0	1,000.0	1,007.0	1,007.0	4.5	4.5	-125.06	-202.6	-288.6	352.6	343.6	9.01	39.127		
1,100.0	1,100.0	1,107.0	1,107.0	4.8	4.8	-125.06	-202.6	-288.6	352.6	343.0	9.56	36.889		
1,200.0	1,200.0	1,207.0	1,207.0	5.1	5.1	-125.06	-202.6	-288.6	352.6	342.5	10.13	34.819		
1,300.0	1,300.0	1,307.0	1,307.0	5.4	5.4	-125.06	-202.6	-288.6	352.6	341.9	10.71	32.915		
1,400.0	1,400.0	1,407.0	1,407.0	5.7	5.7	-125.06	-202.6	-288.6	352.6	341.3	11.31	31.166		
1,500.0	1,500.0	1,507.0	1,507.0	6.0	6.0	-125.06	-202.6	-288.6	352.6	340.7	11.93	29.562		
1,600.0	1,600.0	1,607.0	1,607.0	6.3	6.3	-125.06	-202.6	-288.6	352.6	340.0	12.55	28.090		
1,700.0	1,700.0	1,707.0	1,707.0	6.6	6.6	-125.06	-202.6	-288.6	352.6	339.4	13.19	26.739		
1,800.0	1,800.0	1,807.0	1,807.0	6.9	6.9	-125.06	-202.6	-288.6	352.6	338.8	13.83	25.497		
1,900.0	1,900.0	1,907.0	1,907.0	7.2	7.2	-125.06	-202.6	-288.6	352.6	338.1	14.48	24.354		
2,000.0	2,000.0	2,007.0	2,007.0	7.6	7.6	-125.06	-202.6	-288.6	352.6	337.5	15.13	23.299		
2,100.0	2,100.0	2,107.0	2,107.0	7.9	7.9	-125.06	-202.6	-288.6	352.6	336.8	15.79	22.324		
2,200.0	2,200.0	2,207.0	2,207.0	8.2	8.2	-125.06	-202.6	-288.6	352.6	336.1	16.46	21.422		
2,300.0	2,300.0	2,307.0	2,307.0	8.6	8.6	-125.06	-202.6	-288.6	352.6	335.5	17.13	20.584		
2,400.0	2,400.0	2,407.0	2,407.0	8.9	8.9	-125.06	-202.6	-288.6	352.6	334.8	17.80	19.806		
2,414.2	2,414.2	2,421.2	2,421.2	8.9	9.0	-125.06	-202.6	-288.6	352.6	334.7	17.90	19.700 CC		
2,500.0	2,500.0	2,506.5	2,506.5	9.2	9.2	-125.06	-202.6	-288.6	352.6	334.1	18.48	19.083 ES		
2,600.0	2,600.0	2,600.0	2,600.0	9.6	9.6	-124.83	-202.0	-290.2	353.7	334.5	19.13	18.491		
2,700.0	2,700.0	2,693.1	2,692.9	9.9	9.9	-124.21	-200.3	-294.7	356.6	336.9	19.76	18.044		
2,800.0	2,800.0	2,788.6	2,788.1	10.3	10.2	-123.21	-197.7	-302.0	361.4	341.0	20.41	17.706		
2,900.0	2,900.0	2,888.2	2,887.3	10.6	10.5	-122.12	-194.7	-310.2	366.7	345.6	21.09	17.392		
3,000.0	3,000.0	2,987.8	2,986.6	10.9	10.9	-121.06	-191.7	-318.3	372.2	350.4	21.76	17.101		
3,100.0	3,100.0	3,087.4	3,085.8	11.3	11.2	-120.04	-188.8	-326.5	377.7	355.3	22.44	16.830		
3,200.0	3,200.0	3,187.0	3,185.0	11.6	11.5	-119.04	-185.8	-334.6	383.4	360.3	23.12	16.580		
3,300.0	3,300.0	3,286.6	3,284.3	12.0	11.9	-118.07	-182.8	-342.8	389.2	365.4	23.81	16.347		
3,400.0	3,400.0	3,386.3	3,383.5	12.3	12.2	-117.14	-179.9	-350.9	395.0	370.6	24.49	16.130		
3,500.0	3,500.0	3,485.9	3,482.8	12.7	12.6	-116.23	-176.9	-359.1	401.0	375.9	25.18	15.928		
3,600.0	3,600.0	3,585.5	3,582.0	13.0	12.9	-115.34	-173.9	-367.3	407.1	381.3	25.87	15.739		
3,700.0	3,700.0	3,685.1	3,681.3	13.4	13.2	-114.48	-171.0	-375.4	413.3	386.8	26.56	15.563		
3,800.0	3,800.0	3,784.7	3,780.5	13.7	13.6	-113.65	-168.0	-383.6	419.6	392.3	27.25	15.398		
3,900.0	3,900.0	3,884.4	3,879.7	14.1	13.9	-112.84	-165.0	-391.7	425.9	398.0	27.94	15.244		
4,000.0	4,000.0	3,984.0	3,979.0	14.4	14.3	-112.06	-162.0	-399.9	432.4	403.8	28.64	15.099		
4,100.0	4,100.0	4,083.6	4,078.2	14.8	14.6	-111.30	-159.1	-408.1	438.9	409.6	29.33	14.964		
4,200.0	4,200.0	4,183.2	4,177.5	15.1	15.0	-110.56	-156.1	-416.2	445.5	415.5	30.03	14.837		
4,300.0	4,300.0	4,282.8	4,276.7	15.5	15.3	-109.84	-153.1	-424.4	452.2	421.5	30.72	14.717		
4,400.0	4,400.0	4,382.5	4,375.9	15.8	15.7	-109.15	-150.2	-432.5	458.9	427.5	31.42	14.604		
4,500.0	4,500.0	4,482.1	4,475.2	16.2	16.0	-108.47	-147.2	-440.7	465.7	433.6	32.12	14.498		
4,600.0	4,600.0	4,581.7	4,574.4	16.5	16.4	-107.81	-144.2	-448.8	472.6	439.8	32.82	14.398		
4,700.0	4,700.0	4,681.3	4,673.7	16.9	16.7	-107.18	-141.3	-457.0	479.5	446.0	33.52	14.304		
4,800.0	4,800.0	4,780.9	4,772.9	17.2	17.1	-106.56	-138.3	-465.2	486.5	452.3	34.22	14.215		
4,900.0	4,900.0	4,880.6	4,872.1	17.6	17.4	-105.95	-135.3	-473.3	493.5	458.6	34.93	14.130		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #502H - OWB - PWP0													Offset Site Error:	3.0 usft
Survey Program: 0-MWD+IFR1+FDIR													Offset Well Error:	3.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Semi Major Axis	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
5,000.0	5,000.0	4,980.2	4,971.4	17.9	17.8	-105.37	-105.37	-132.4	-481.5	500.6	465.0	35.63	14.051	
5,100.0	5,100.0	5,079.8	5,070.6	18.3	18.1	-104.80	-104.80	-129.4	-489.6	507.8	471.4	36.33	13.975	
5,200.0	5,200.0	5,179.4	5,169.9	18.7	18.5	-104.25	-104.25	-126.4	-497.8	514.9	477.9	37.04	13.904	
5,300.0	5,300.0	5,279.0	5,269.1	19.0	18.8	-103.71	-103.71	-123.4	-506.0	522.2	484.4	37.74	13.836	
5,400.0	5,400.0	5,378.7	5,368.3	19.4	19.2	-103.19	-103.19	-120.5	-514.1	529.5	491.0	38.45	13.771	
5,500.0	5,500.0	5,478.3	5,467.6	19.7	19.6	-102.68	-102.68	-117.5	-522.3	536.8	497.6	39.15	13.710	
5,600.0	5,600.0	5,578.0	5,566.9	20.1	19.9	2.82	2.82	-114.5	-530.4	542.4	502.6	39.85	13.612	
5,700.0	5,699.8	5,677.9	5,666.4	20.4	20.3	3.33	3.33	-111.6	-538.6	544.6	504.1	40.53	13.436	
5,730.0	5,729.8	5,707.8	5,696.2	20.5	20.4	3.49	3.49	-110.7	-541.1	544.6	503.8	40.74	13.368	
5,800.0	5,799.5	5,777.7	5,765.9	20.7	20.6	3.86	3.86	-108.6	-546.8	544.2	503.0	41.22	13.203	
5,900.0	5,899.2	5,877.6	5,865.4	21.1	21.0	4.39	4.39	-105.6	-555.0	543.7	501.8	41.90	12.974	
6,000.0	5,998.9	5,977.5	5,964.9	21.4	21.3	4.92	4.92	-102.6	-563.2	543.2	500.6	42.59	12.753	
6,100.0	6,098.6	6,077.3	6,064.4	21.7	21.7	5.46	5.46	-99.6	-571.3	542.8	499.5	43.28	12.541	
6,200.0	6,198.2	6,177.2	6,163.9	22.1	22.1	5.99	5.99	-96.7	-579.5	542.4	498.5	43.97	12.335	
6,300.0	6,297.9	6,277.1	6,263.3	22.4	22.4	6.53	6.53	-93.7	-587.7	542.1	497.4	44.67	12.137	
6,400.0	6,397.6	6,377.0	6,362.8	22.8	22.8	7.06	7.06	-90.7	-595.9	541.8	496.5	45.36	11.945	
6,500.0	6,497.3	6,476.8	6,462.3	23.1	23.1	7.60	7.60	-87.7	-604.1	541.6	495.5	46.05	11.760	
6,600.0	6,597.0	6,576.7	6,561.8	23.4	23.5	8.13	8.13	-84.8	-612.2	541.4	494.7	46.75	11.582	
6,700.0	6,696.6	6,676.6	6,661.3	23.8	23.8	8.67	8.67	-81.8	-620.4	541.3	493.8	47.44	11.409	
6,800.0	6,796.3	6,776.4	6,760.8	24.1	24.2	9.20	9.20	-78.8	-628.6	541.2	493.1	48.14	11.242	
6,900.0	6,896.0	6,876.3	6,860.3	24.5	24.6	9.74	9.74	-75.8	-636.8	541.2	492.3	48.84	11.081	
6,930.7	6,926.5	6,906.9	6,890.8	24.6	24.7	9.91	9.91	-74.9	-639.3	541.2	492.1	49.05	11.032	
7,000.0	6,995.7	6,976.2	6,959.8	24.8	24.9	10.28	10.28	-72.9	-645.0	541.2	491.6	49.54	10.924	
7,100.0	7,095.3	7,076.0	7,059.3	25.1	25.3	10.81	10.81	-69.9	-653.1	541.2	491.0	50.24	10.773	
7,200.0	7,195.0	7,175.9	7,158.8	25.5	25.6	11.35	11.35	-66.9	-661.3	541.3	490.4	50.94	10.627	
7,300.0	7,294.7	7,275.8	7,258.3	25.8	26.0	11.89	11.89	-63.9	-669.5	541.5	489.8	51.64	10.486	
7,400.0	7,394.4	7,375.7	7,357.7	26.2	26.4	12.42	12.42	-60.9	-677.7	541.7	489.3	52.34	10.349	
7,500.0	7,494.1	7,475.5	7,457.2	26.5	26.7	12.96	12.96	-58.0	-685.9	541.9	488.9	53.04	10.217	
7,600.0	7,593.7	7,575.4	7,556.7	26.9	27.1	13.49	13.49	-55.0	-694.0	542.2	488.5	53.75	10.089	
7,700.0	7,693.4	7,675.3	7,656.2	27.2	27.4	14.03	14.03	-52.0	-702.2	542.6	488.1	54.45	9.964	
7,800.0	7,793.1	7,775.1	7,755.7	27.6	27.8	14.56	14.56	-49.0	-710.4	543.0	487.8	55.15	9.844	
7,900.0	7,892.8	7,875.0	7,855.2	27.9	28.2	15.09	15.09	-46.1	-718.6	543.4	487.5	55.86	9.728	
8,000.0	7,992.4	7,974.9	7,954.7	28.3	28.5	15.62	15.62	-43.1	-726.8	543.9	487.3	56.57	9.615	
8,100.0	8,092.1	8,074.8	8,054.2	28.6	28.9	16.16	16.16	-40.1	-734.9	544.4	487.1	57.27	9.505	
8,200.0	8,191.8	8,174.6	8,153.7	29.0	29.2	16.69	16.69	-37.1	-743.1	545.0	487.0	57.98	9.399	
8,300.0	8,291.5	8,274.5	8,253.2	29.3	29.6	17.21	17.21	-34.2	-751.3	545.6	486.9	58.69	9.297	
8,400.0	8,391.2	8,374.4	8,352.7	29.7	30.0	17.74	17.74	-31.2	-759.5	546.3	486.9	59.40	9.197	
8,500.0	8,490.8	8,474.2	8,452.1	30.0	30.3	18.27	18.27	-28.2	-767.6	547.0	486.9	60.10	9.101	
8,600.0	8,590.5	8,572.0	8,549.5	30.4	30.7	18.78	18.78	-25.3	-775.7	547.8	487.0	60.80	9.009	
8,700.0	8,690.2	8,658.6	8,635.5	30.7	31.0	18.56	18.56	-29.0	-784.4	550.0	488.6	61.38	8.960 SF	
8,800.0	8,789.9	8,740.8	8,715.5	31.1	31.2	17.14	17.14	-44.2	-795.5	555.2	493.4	61.86	8.975	
8,900.0	8,889.5	8,817.6	8,787.2	31.4	31.5	14.80	14.80	-68.3	-808.3	564.5	502.3	62.16	9.081	
9,000.0	8,989.2	8,886.9	8,848.4	31.8	31.7	11.95	11.95	-98.0	-821.5	579.1	517.0	62.16	9.317	
9,100.0	9,088.9	8,950.0	8,900.3	32.1	31.9	8.84	8.84	-131.2	-834.8	600.6	538.8	61.81	9.716	
9,200.0	9,188.6	9,000.0	8,938.6	32.5	32.0	6.11	6.11	-161.3	-846.1	629.8	568.9	60.92	10.338	
9,300.0	9,288.3	9,050.0	8,973.9	32.8	32.1	3.21	3.21	-194.6	-858.0	667.1	607.3	59.81	11.152	
9,400.0	9,387.9	9,087.3	8,998.2	33.2	32.2	0.97	0.97	-221.4	-867.1	712.2	653.9	58.26	12.224	
9,500.0	9,487.6	9,121.6	9,018.9	33.5	32.3	-1.11	-1.11	-247.4	-875.8	764.6	707.9	56.62	13.504	
9,600.0	9,587.3	9,150.0	9,034.7	33.9	32.4	-2.84	-2.84	-269.8	-883.0	823.4	768.5	54.90	14.998	
9,700.0	9,687.0	9,177.2	9,048.8	34.2	32.4	-4.50	-4.50	-292.0	-890.1	887.8	834.5	53.32	16.652	
9,800.0	9,786.6	9,200.0	9,059.7	34.6	32.5	-5.87	-5.87	-311.1	-896.0	957.0	905.2	51.81	18.471	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #701H - OWB - PWP1													Offset Site Error:	3.0 usft
Survey Program: 0-MWD+IFR1+FDIR													Offset Well Error:	3.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Semi Major Axis	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
0.0	0.0	1.0	1.0	3.0	3.0	89.56		0.2	30.0	30.0				
100.0	100.0	101.0	101.0	3.0	3.0	89.56		0.2	30.0	30.0	24.0	6.01	4.989	
200.0	200.0	201.0	201.0	3.0	3.0	89.56		0.2	30.0	30.0	23.9	6.08	4.928	
300.0	300.0	301.0	301.0	3.1	3.1	89.56		0.2	30.0	30.0	23.7	6.24	4.805	
400.0	400.0	401.0	401.0	3.2	3.2	89.56		0.2	30.0	30.0	23.5	6.47	4.632	
500.0	500.0	501.0	501.0	3.4	3.4	89.56		0.2	30.0	30.0	23.2	6.77	4.426	
600.0	600.0	601.0	601.0	3.6	3.6	89.56		0.2	30.0	30.0	22.8	7.13	4.203	
700.0	700.0	701.0	701.0	3.8	3.8	89.56		0.2	30.0	30.0	22.4	7.54	3.973	
800.0	800.0	801.0	801.0	4.0	4.0	89.56		0.2	30.0	30.0	22.0	7.99	3.747	
900.0	900.0	901.0	901.0	4.2	4.2	89.56		0.2	30.0	30.0	21.5	8.49	3.531	
1,000.0	1,000.0	1,001.0	1,001.0	4.5	4.5	89.56		0.2	30.0	30.0	21.0	9.01	3.326	
1,100.0	1,100.0	1,101.0	1,101.0	4.8	4.8	89.56		0.2	30.0	30.0	20.4	9.55	3.136	
1,200.0	1,200.0	1,201.0	1,201.0	5.1	5.1	89.56		0.2	30.0	30.0	19.8	10.12	2.960	
1,300.0	1,300.0	1,301.0	1,301.0	5.4	5.4	89.56		0.2	30.0	30.0	19.3	10.71	2.798	
1,400.0	1,400.0	1,401.0	1,401.0	5.7	5.7	89.56		0.2	30.0	30.0	18.7	11.31	2.649	
1,500.0	1,500.0	1,501.0	1,501.0	6.0	6.0	89.56		0.2	30.0	30.0	18.0	11.92	2.513	
1,600.0	1,600.0	1,601.0	1,601.0	6.3	6.3	89.56		0.2	30.0	30.0	17.4	12.55	2.388	
1,700.0	1,700.0	1,701.0	1,701.0	6.6	6.6	89.56		0.2	30.0	30.0	16.8	13.18	2.273	
1,800.0	1,800.0	1,801.0	1,801.0	6.9	6.9	89.56		0.2	30.0	30.0	16.1	13.82	2.167	
1,900.0	1,900.0	1,901.0	1,901.0	7.2	7.2	89.56		0.2	30.0	30.0	15.5	14.47	2.070	
2,000.0	2,000.0	2,001.0	2,001.0	7.6	7.6	89.56		0.2	30.0	30.0	14.8	15.13	1.981 Advise and Monitor	
2,100.0	2,100.0	2,101.0	2,101.0	7.9	7.9	89.56		0.2	30.0	30.0	14.2	15.79	1.898 Advise and Monitor	
2,200.0	2,200.0	2,201.0	2,201.0	8.2	8.2	89.56		0.2	30.0	30.0	13.5	16.45	1.821 Advise and Monitor	
2,300.0	2,300.0	2,301.0	2,301.0	8.6	8.6	89.56		0.2	30.0	30.0	12.8	17.12	1.750 Advise and Monitor	
2,400.0	2,400.0	2,401.0	2,401.0	8.9	8.9	89.56		0.2	30.0	30.0	12.2	17.80	1.683 Advise and Monitor	
2,416.3	2,416.3	2,417.3	2,417.3	9.0	9.0	89.56		0.2	30.0	30.0	12.1	17.91	1.673 Advise and Monitor, CC	
2,500.0	2,500.0	2,501.0	2,501.0	9.2	9.2	89.56		0.2	30.0	30.0	11.5	18.47	1.622 Advise and Monitor, ES, SF	
2,600.0	2,600.0	2,600.0	2,600.0	9.6	9.6	88.50		0.8	31.6	31.6	12.5	19.14	1.653 Advise and Monitor	
2,700.0	2,700.0	2,699.2	2,699.0	9.9	9.9	86.02		2.5	36.3	36.4	16.6	19.79	1.839 Advise and Monitor	
2,800.0	2,800.0	2,799.0	2,798.7	10.3	10.2	83.87		4.5	41.6	41.9	21.5	20.46	2.048	
2,900.0	2,900.0	2,898.8	2,898.4	10.6	10.6	82.22		6.4	47.0	47.5	26.3	21.13	2.246	
3,000.0	3,000.0	2,998.7	2,998.0	10.9	10.9	80.92		8.4	52.3	53.1	31.2	21.81	2.432	
3,100.0	3,100.0	3,098.5	3,097.7	11.3	11.2	79.86		10.3	57.7	58.7	36.2	22.49	2.608	
3,200.0	3,200.0	3,198.3	3,197.4	11.6	11.6	78.99		12.3	63.0	64.3	41.1	23.18	2.774	
3,300.0	3,300.0	3,298.2	3,297.1	12.0	11.9	78.26		14.2	68.4	69.9	46.1	23.86	2.931	
3,400.0	3,400.0	3,398.0	3,396.7	12.3	12.3	77.64		16.2	73.7	75.6	51.0	24.55	3.079	
3,500.0	3,500.0	3,497.8	3,496.4	12.7	12.6	77.10		18.1	79.1	81.2	56.0	25.24	3.219	
3,600.0	3,600.0	3,597.7	3,596.1	13.0	12.9	76.64		20.1	84.4	86.9	61.0	25.93	3.352	
3,700.0	3,700.0	3,697.5	3,695.8	13.4	13.3	76.23		22.0	89.8	92.6	66.0	26.62	3.477	
3,800.0	3,800.0	3,797.4	3,795.4	13.7	13.6	75.87		23.9	95.1	98.2	70.9	27.31	3.597	
3,900.0	3,900.0	3,897.2	3,895.1	14.1	14.0	75.55		25.9	100.5	103.9	75.9	28.01	3.710	
4,000.0	4,000.0	3,997.0	3,994.8	14.4	14.3	75.26		27.8	105.8	109.6	80.9	28.70	3.818	
4,100.0	4,100.0	4,096.9	4,094.4	14.8	14.7	75.00		29.8	111.2	115.3	85.9	29.40	3.921	
4,200.0	4,200.0	4,196.7	4,194.1	15.1	15.0	74.76		31.7	116.5	121.0	90.9	30.10	4.019	
4,300.0	4,300.0	4,296.5	4,293.8	15.5	15.4	74.55		33.7	121.9	126.7	95.9	30.80	4.112	
4,400.0	4,400.0	4,396.4	4,393.5	15.8	15.7	74.35		35.6	127.2	132.3	100.8	31.50	4.202	
4,500.0	4,500.0	4,496.2	4,493.1	16.2	16.1	74.17		37.6	132.6	138.0	105.8	32.20	4.287	
4,600.0	4,600.0	4,596.1	4,592.8	16.5	16.4	74.01		39.5	137.9	143.7	110.8	32.90	4.368	
4,700.0	4,700.0	4,695.9	4,692.5	16.9	16.8	73.86		41.5	143.3	149.4	115.8	33.60	4.446	
4,800.0	4,800.0	4,795.7	4,792.2	17.2	17.1	73.71		43.4	148.6	155.1	120.8	34.30	4.521	
4,900.0	4,900.0	4,895.6	4,891.8	17.6	17.5	73.58		45.4	154.0	160.8	125.8	35.01	4.593	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #701H - OWB - PWP1													Offset Site Error:	3.0 usft
Survey Program: 0-MWD+IFR1+FDIR													Offset Well Error:	3.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Semi Major Axis	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
5,000.0	5,000.0	4,995.4	4,991.5	17.9	17.8	73.46		47.3	159.3	166.5	130.8	35.71	4.662	
5,100.0	5,100.0	5,095.2	5,091.2	18.3	18.2	73.35		49.3	164.7	172.2	135.8	36.42	4.728	
5,200.0	5,200.0	5,195.1	5,190.9	18.7	18.5	73.24		51.2	170.0	177.9	140.8	37.12	4.792	
5,300.0	5,300.0	5,294.9	5,290.5	19.0	18.9	73.14		53.2	175.4	183.6	145.7	37.83	4.853	
5,400.0	5,400.0	5,394.8	5,390.2	19.4	19.2	73.04		55.1	180.7	189.3	150.7	38.53	4.912	
5,500.0	5,500.0	5,494.6	5,489.9	19.7	19.6	72.95		57.1	186.1	195.0	155.7	39.24	4.969	
5,600.0	5,600.0	5,594.3	5,589.4	20.1	19.9	177.88		59.0	191.4	202.4	162.5	39.93	5.068	
5,700.0	5,699.8	5,693.7	5,688.7	20.4	20.3	177.85		60.9	196.8	213.3	172.7	40.62	5.252	
5,730.0	5,729.8	5,723.4	5,718.4	20.5	20.4	177.85		61.5	198.4	217.3	176.4	40.82	5.322	
5,800.0	5,799.5	5,792.8	5,787.6	20.7	20.6	177.85		62.9	202.1	226.8	185.5	41.30	5.493	
5,900.0	5,899.2	5,891.8	5,886.5	21.1	21.0	177.85		64.8	207.4	240.5	198.5	41.98	5.729	
6,000.0	5,998.9	5,990.9	5,985.4	21.4	21.3	177.86		66.7	212.7	254.2	211.5	42.66	5.958	
6,100.0	6,098.6	6,090.0	6,084.3	21.7	21.7	177.86		68.7	218.0	267.9	224.5	43.35	6.180	
6,200.0	6,198.2	6,189.0	6,183.2	22.1	22.0	177.86		70.6	223.3	281.6	237.5	44.03	6.395	
6,300.0	6,297.9	6,288.1	6,282.1	22.4	22.4	177.87		72.5	228.6	295.2	250.5	44.72	6.602	
6,400.0	6,397.6	6,387.1	6,381.0	22.8	22.7	177.87		74.5	233.9	308.9	263.5	45.40	6.804	
6,500.0	6,497.3	6,486.2	6,479.9	23.1	23.1	177.87		76.4	239.2	322.6	276.5	46.09	6.999	
6,600.0	6,597.0	6,585.3	6,578.8	23.4	23.5	177.87		78.3	244.6	336.3	289.5	46.78	7.188	
6,700.0	6,696.6	6,684.3	6,677.7	23.8	23.8	177.87		80.3	249.9	350.0	302.5	47.47	7.372	
6,800.0	6,796.3	6,783.4	6,776.6	24.1	24.2	177.88		82.2	255.2	363.6	315.5	48.16	7.550	
6,900.0	6,896.0	6,882.4	6,875.5	24.5	24.5	177.88		84.1	260.5	377.3	328.5	48.85	7.724	
7,000.0	6,995.7	6,981.5	6,974.4	24.8	24.9	177.88		86.1	265.8	391.0	341.4	49.54	7.892	
7,100.0	7,095.3	7,080.6	7,073.3	25.1	25.2	177.88		88.0	271.1	404.7	354.4	50.24	8.055	
7,200.0	7,195.0	7,179.6	7,172.2	25.5	25.6	177.88		89.9	276.4	418.4	367.4	50.93	8.214	
7,300.0	7,294.7	7,278.7	7,271.1	25.8	25.9	177.88		91.9	281.7	432.0	380.4	51.62	8.369	
7,400.0	7,394.4	7,377.7	7,370.0	26.2	26.3	177.88		93.8	287.0	445.7	393.4	52.32	8.519	
7,500.0	7,494.1	7,476.8	7,468.9	26.5	26.6	177.88		95.7	292.3	459.4	406.4	53.01	8.665	
7,600.0	7,593.7	7,575.9	7,567.8	26.9	27.0	177.88		97.7	297.7	473.1	419.4	53.71	8.808	
7,700.0	7,693.4	7,674.9	7,666.7	27.2	27.3	177.89		99.6	303.0	486.8	432.3	54.41	8.946	
7,800.0	7,793.1	7,774.0	7,765.6	27.6	27.7	177.89		101.5	308.3	500.4	445.3	55.10	9.081	
7,900.0	7,892.8	7,873.0	7,864.5	27.9	28.0	177.89		103.5	313.6	514.1	458.3	55.80	9.213	
8,000.0	7,992.4	7,972.1	7,963.4	28.3	28.4	177.89		105.4	318.9	527.8	471.3	56.50	9.341	
8,100.0	8,092.1	8,071.2	8,062.3	28.6	28.8	177.89		107.3	324.2	541.5	484.3	57.20	9.466	
8,200.0	8,191.8	8,170.2	8,161.2	29.0	29.1	177.89		109.3	329.5	555.2	497.3	57.90	9.588	
8,300.0	8,291.5	8,269.3	8,260.1	29.3	29.5	177.89		111.2	334.8	568.8	510.2	58.60	9.707	
8,400.0	8,391.2	8,368.3	8,359.0	29.7	29.8	177.89		113.1	340.1	582.5	523.2	59.30	9.823	
8,500.0	8,490.8	8,467.4	8,457.9	30.0	30.2	177.89		115.1	345.4	596.2	536.2	60.00	9.936	
8,600.0	8,590.5	8,566.5	8,556.8	30.4	30.5	177.89		117.0	350.7	609.9	549.2	60.70	10.047	
8,700.0	8,690.2	8,665.5	8,655.7	30.7	30.9	177.89		118.9	356.1	623.6	562.1	61.40	10.155	
8,800.0	8,789.9	8,764.6	8,754.6	31.1	31.2	177.89		120.9	361.4	637.2	575.1	62.11	10.260	
8,900.0	8,889.5	8,863.6	8,853.5	31.4	31.6	177.89		122.8	366.7	650.9	588.1	62.81	10.364	
9,000.0	8,989.2	8,962.7	8,952.4	31.8	31.9	177.89		124.7	372.0	664.6	601.1	63.51	10.464	
9,100.0	9,088.9	9,061.8	9,051.3	32.1	32.3	177.89		126.7	377.3	678.3	614.1	64.21	10.563	
9,200.0	9,188.6	9,160.8	9,150.2	32.5	32.7	177.90		128.6	382.6	692.0	627.0	64.92	10.659	
9,300.0	9,288.3	9,259.9	9,249.1	32.8	33.0	177.90		130.5	387.9	705.6	640.0	65.62	10.753	
9,400.0	9,387.9	9,358.9	9,348.0	33.2	33.4	177.90		132.4	393.2	719.3	653.0	66.33	10.845	
9,500.0	9,487.6	9,458.0	9,446.9	33.5	33.7	177.90		134.4	398.5	733.0	666.0	67.03	10.935	
9,600.0	9,587.3	9,557.1	9,545.8	33.9	34.1	177.90		136.3	403.8	746.7	678.9	67.74	11.023	
9,700.0	9,687.0	9,656.1	9,644.6	34.2	34.4	177.90		138.2	409.2	760.4	691.9	68.44	11.110	
9,800.0	9,786.6	9,755.2	9,743.5	34.6	34.8	177.90		140.2	414.5	774.0	704.9	69.15	11.194	
9,900.0	9,886.3	9,854.2	9,842.4	34.9	35.1	177.90		142.1	419.8	787.7	717.9	69.85	11.277	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #701H - OWB - PWP1													Offset Site Error:	3.0 usft
Survey Program: 0-MWD+IFR1+FDIR													Offset Well Error:	3.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Semi Major Axis	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
10,000.0	9,986.0	9,953.3	9,941.3	35.3	35.5	177.90		144.0	425.1	801.4	730.8	70.56	11.358	
10,100.0	10,085.7	10,052.4	10,040.2	35.7	35.9	177.90		146.0	430.4	815.1	743.8	71.27	11.437	
10,197.9	10,183.3	10,149.4	10,137.1	36.0	36.2	177.90		147.9	435.6	828.5	756.5	71.96	11.513	
10,200.0	10,185.4	10,151.4	10,139.1	36.0	36.2	-179.62		147.9	435.7	828.8	756.8	71.97	11.515	
10,250.0	10,235.1	10,206.3	10,193.9	36.2	36.4	-141.18		148.8	438.6	836.2	763.9	72.36	11.557	
10,300.0	10,284.3	10,292.5	10,279.7	36.4	36.7	-127.17		142.1	443.3	843.5	770.7	72.88	11.575	
10,350.0	10,332.7	10,379.6	10,364.3	36.5	37.0	-120.30		122.3	448.0	849.8	776.5	73.28	11.597	
10,400.0	10,379.8	10,466.4	10,444.6	36.7	37.2	-115.92		90.0	452.5	855.0	781.5	73.58	11.620	
10,450.0	10,425.4	10,551.7	10,518.0	36.8	37.5	-112.59		46.8	456.7	859.2	785.4	73.82	11.639	
10,500.0	10,469.1	10,634.6	10,582.3	37.0	37.7	-109.76		-5.2	460.5	862.4	788.4	74.04	11.649	
10,550.0	10,510.4	10,714.3	10,636.6	37.1	37.8	-107.21		-63.5	463.8	864.8	790.5	74.26	11.646	
10,600.0	10,549.2	10,790.5	10,680.3	37.3	38.0	-104.84		-125.6	466.6	866.4	791.9	74.51	11.628	
10,650.0	10,585.2	10,862.7	10,713.9	37.4	38.1	-102.61		-189.5	468.8	867.5	792.7	74.80	11.598	
10,700.0	10,618.0	10,931.2	10,738.1	37.5	38.2	-100.50		-253.5	470.5	868.1	793.0	75.11	11.558	
10,750.0	10,647.3	10,996.0	10,753.8	37.6	38.3	-98.50		-316.3	471.8	868.4	793.0	75.42	11.513	
10,800.0	10,673.1	11,057.4	10,762.1	37.7	38.4	-96.61		-377.1	472.6	868.4	792.7	75.73	11.468	
10,850.0	10,695.1	11,113.2	10,764.0	37.8	38.5	-94.89		-432.9	473.1	868.4	792.4	76.00	11.426	
10,851.1	10,695.5	11,114.2	10,764.0	37.8	38.5	-94.86		-433.9	473.1	868.4	792.4	76.00	11.426	
10,900.0	10,713.0	11,159.8	10,764.1	37.9	38.5	-93.61		-479.5	473.4	868.6	792.3	76.22	11.395	
10,950.0	10,726.9	11,207.8	10,764.1	38.0	38.6	-92.58		-527.5	473.7	868.9	792.5	76.40	11.373	
11,000.0	10,736.5	11,256.9	10,764.2	38.1	38.6	-91.84		-576.6	474.0	869.3	792.8	76.56	11.354	
11,050.0	10,741.8	11,306.6	10,764.2	38.2	38.7	-91.42		-626.3	474.3	869.6	792.9	76.70	11.337	
11,085.7	10,743.0	11,342.3	10,764.2	38.2	38.8	-91.34		-662.0	474.5	869.7	792.9	76.80	11.324	
11,100.0	10,743.0	11,356.6	10,764.3	38.2	38.8	-91.34		-676.3	474.6	869.7	792.8	76.83	11.319	
11,200.0	10,743.1	11,456.6	10,764.4	38.4	38.9	-91.34		-776.3	475.3	869.7	792.6	77.11	11.279	
11,300.0	10,743.2	11,556.6	10,764.5	38.5	39.1	-91.34		-876.2	475.9	869.7	792.3	77.42	11.234	
11,400.0	10,743.3	11,656.6	10,764.6	38.7	39.3	-91.34		-976.2	476.6	869.7	791.9	77.77	11.184	
11,500.0	10,743.4	11,756.6	10,764.7	38.9	39.5	-91.34		-1,076.2	477.2	869.7	791.6	78.15	11.129	
11,600.0	10,743.5	11,856.6	10,764.8	39.1	39.7	-91.34		-1,176.2	477.9	869.7	791.1	78.57	11.069	
11,700.0	10,743.6	11,956.6	10,764.9	39.3	39.9	-91.33		-1,276.2	478.5	869.7	790.7	79.03	11.005	
11,800.0	10,743.7	12,056.6	10,765.0	39.6	40.2	-91.33		-1,376.2	479.2	869.7	790.2	79.52	10.937	
11,900.0	10,743.8	12,156.6	10,765.1	39.8	40.4	-91.33		-1,476.2	479.8	869.7	789.7	80.04	10.866	
12,000.0	10,743.9	12,256.6	10,765.2	40.1	40.7	-91.33		-1,576.2	480.5	869.7	789.1	80.60	10.791	
12,100.0	10,744.0	12,356.6	10,765.3	40.4	41.0	-91.33		-1,676.2	481.1	869.7	788.5	81.19	10.712	
12,200.0	10,744.1	12,456.6	10,765.4	40.7	41.3	-91.33		-1,776.2	481.8	869.7	787.9	81.82	10.630	
12,300.0	10,744.2	12,556.6	10,765.5	41.0	41.7	-91.33		-1,876.2	482.4	869.7	787.3	82.47	10.546	
12,400.0	10,744.3	12,656.6	10,765.6	41.4	42.0	-91.33		-1,976.2	483.1	869.8	786.6	83.16	10.459	
12,500.0	10,744.4	12,756.6	10,765.7	41.7	42.4	-91.33		-2,076.2	483.7	869.8	785.9	83.87	10.370	
12,600.0	10,744.6	12,856.6	10,765.8	42.1	42.8	-91.33		-2,176.2	484.4	869.8	785.1	84.61	10.279	
12,700.0	10,744.7	12,956.6	10,765.9	42.5	43.2	-91.33		-2,276.2	485.0	869.8	784.4	85.39	10.186	
12,800.0	10,744.8	13,056.6	10,766.0	42.9	43.6	-91.33		-2,376.2	485.7	869.8	783.6	86.19	10.092	
12,900.0	10,744.9	13,156.6	10,766.1	43.3	44.0	-91.33		-2,476.2	486.3	869.8	782.8	87.01	9.996	
13,000.0	10,745.0	13,256.6	10,766.2	43.7	44.4	-91.33		-2,576.2	486.9	869.8	781.9	87.87	9.899	
13,100.0	10,745.1	13,356.6	10,766.3	44.2	44.8	-91.33		-2,676.2	487.6	869.8	781.0	88.75	9.801	
13,200.0	10,745.2	13,456.6	10,766.4	44.6	45.3	-91.33		-2,776.2	488.2	869.8	780.2	89.65	9.702	
13,300.0	10,745.3	13,556.6	10,766.5	45.1	45.8	-91.33		-2,876.2	488.9	869.8	779.2	90.57	9.603	
13,400.0	10,745.4	13,656.6	10,766.6	45.5	46.2	-91.33		-2,976.2	489.5	869.8	778.3	91.52	9.504	
13,500.0	10,745.5	13,756.6	10,766.7	46.0	46.7	-91.33		-3,076.2	490.2	869.8	777.3	92.50	9.404	
13,600.0	10,745.6	13,856.6	10,766.8	46.5	47.2	-91.33		-3,176.2	490.8	869.8	776.3	93.49	9.304	
13,700.0	10,745.7	13,956.6	10,766.9	47.0	47.7	-91.33		-3,276.2	491.5	869.8	775.3	94.51	9.204	
13,800.0	10,745.8	14,056.6	10,767.0	47.5	48.2	-91.33		-3,376.2	492.1	869.8	774.3	95.54	9.104	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #701H - OWB - PWP1												Offset Site Error:	3.0 usft
Survey Program: 0-MWD+IFR1+FDIR												Offset Well Error:	3.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Semi Major Axis	Highside Toolface (°)	Offset Wellbore Centre	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
								+N/-S (usft)	+E/-W (usft)				
13,900.0	10,745.9	14,156.6	10,767.1	48.1	48.8	-91.33	-3,476.2	492.8	869.8	773.2	96.60	9.005	
14,000.0	10,746.0	14,256.6	10,767.2	48.6	49.3	-91.33	-3,576.2	493.4	869.8	772.2	97.67	8.906	
14,100.0	10,746.1	14,356.6	10,767.3	49.1	49.9	-91.33	-3,676.2	494.1	869.9	771.1	98.76	8.808	
14,200.0	10,746.2	14,456.6	10,767.4	49.7	50.4	-91.33	-3,776.2	494.7	869.9	770.0	99.87	8.710	
14,300.0	10,746.3	14,556.6	10,767.5	50.3	51.0	-91.33	-3,876.2	495.4	869.9	768.9	101.00	8.613	
14,400.0	10,746.4	14,656.6	10,767.6	50.8	51.6	-91.33	-3,976.2	496.0	869.9	767.7	102.14	8.516	
14,500.0	10,746.5	14,756.6	10,767.7	51.4	52.1	-91.33	-4,076.2	496.7	869.9	766.6	103.30	8.421	
14,600.0	10,746.7	14,856.6	10,767.8	52.0	52.7	-91.33	-4,176.2	497.3	869.9	765.4	104.48	8.326	
14,700.0	10,746.8	14,956.6	10,767.9	52.6	53.3	-91.33	-4,276.2	498.0	869.9	764.2	105.67	8.232	
14,800.0	10,746.9	15,056.6	10,768.0	53.2	53.9	-91.33	-4,376.2	498.6	869.9	763.0	106.87	8.139	
14,900.0	10,747.0	15,156.6	10,768.1	53.8	54.5	-91.33	-4,476.2	499.3	869.9	761.8	108.09	8.048	
15,000.0	10,747.1	15,256.6	10,768.2	54.4	55.1	-91.33	-4,576.2	499.9	869.9	760.6	109.33	7.957	
15,100.0	10,747.2	15,356.6	10,768.3	55.0	55.8	-91.33	-4,676.2	500.5	869.9	759.3	110.57	7.867	
15,200.0	10,747.3	15,456.6	10,768.4	55.6	56.4	-91.33	-4,776.2	501.2	869.9	758.1	111.83	7.779	
15,300.0	10,747.4	15,556.6	10,768.5	56.3	57.0	-91.33	-4,876.2	501.8	869.9	756.8	113.10	7.691	
15,400.0	10,747.5	15,656.6	10,768.6	56.9	57.7	-91.33	-4,976.2	502.5	869.9	755.5	114.39	7.605	
15,500.0	10,747.6	15,756.6	10,768.7	57.6	58.3	-91.33	-5,076.2	503.1	869.9	754.3	115.68	7.520	
15,600.0	10,747.7	15,856.6	10,768.8	58.2	59.0	-91.33	-5,176.2	503.8	869.9	753.0	116.99	7.436	
15,700.0	10,747.8	15,956.6	10,768.9	58.9	59.6	-91.33	-5,276.2	504.4	869.9	751.6	118.30	7.354	
15,800.0	10,747.9	16,056.6	10,769.1	59.5	60.3	-91.33	-5,376.2	505.1	869.9	750.3	119.63	7.272	
15,900.0	10,748.0	16,156.6	10,769.2	60.2	61.0	-91.33	-5,476.2	505.7	870.0	749.0	120.97	7.192	
16,000.0	10,748.1	16,256.6	10,769.3	60.9	61.6	-91.33	-5,576.1	506.4	870.0	747.6	122.31	7.113	
16,100.0	10,748.2	16,356.6	10,769.4	61.6	62.3	-91.33	-5,676.1	507.0	870.0	746.3	123.67	7.035	
16,200.0	10,748.3	16,456.6	10,769.5	62.2	63.0	-91.33	-5,776.1	507.7	870.0	744.9	125.03	6.958	
16,300.0	10,748.4	16,556.6	10,769.6	62.9	63.7	-91.33	-5,876.1	508.3	870.0	743.6	126.41	6.882	
16,400.0	10,748.5	16,656.6	10,769.7	63.6	64.4	-91.33	-5,976.1	509.0	870.0	742.2	127.79	6.808	
16,500.0	10,748.6	16,756.6	10,769.8	64.3	65.1	-91.33	-6,076.1	509.6	870.0	740.8	129.18	6.735	
16,600.0	10,748.8	16,856.6	10,769.9	65.0	65.8	-91.33	-6,176.1	510.3	870.0	739.4	130.58	6.663	
16,700.0	10,748.9	16,956.6	10,770.0	65.7	66.5	-91.32	-6,276.1	510.9	870.0	738.0	131.98	6.592	
16,800.0	10,749.0	17,056.6	10,770.1	66.4	67.2	-91.32	-6,376.1	511.6	870.0	736.6	133.40	6.522	
16,900.0	10,749.1	17,156.6	10,770.2	67.1	67.9	-91.32	-6,476.1	512.2	870.0	735.2	134.82	6.453	
17,000.0	10,749.2	17,256.6	10,770.3	67.8	68.6	-91.32	-6,576.1	512.9	870.0	733.8	136.24	6.386	
17,100.0	10,749.3	17,356.6	10,770.4	68.5	69.3	-91.32	-6,676.1	513.5	870.0	732.3	137.68	6.319	
17,200.0	10,749.4	17,456.6	10,770.5	69.3	70.0	-91.32	-6,776.1	514.2	870.0	730.9	139.12	6.254	
17,300.0	10,749.5	17,556.6	10,770.6	70.0	70.8	-91.32	-6,876.1	514.8	870.0	729.5	140.57	6.190	
17,400.0	10,749.6	17,656.6	10,770.7	70.7	71.5	-91.32	-6,976.1	515.4	870.0	728.0	142.02	6.126	
17,500.0	10,749.7	17,756.6	10,770.8	71.4	72.2	-91.32	-7,076.1	516.1	870.0	726.6	143.48	6.064	
17,600.0	10,749.8	17,856.6	10,770.9	72.2	72.9	-91.32	-7,176.1	516.7	870.1	725.1	144.94	6.003	
17,700.0	10,749.9	17,956.6	10,771.0	72.9	73.7	-91.32	-7,276.1	517.4	870.1	723.6	146.42	5.942	
17,800.0	10,750.0	18,056.6	10,771.1	73.6	74.4	-91.32	-7,376.1	518.0	870.1	722.2	147.89	5.883	
17,900.0	10,750.1	18,156.6	10,771.2	74.4	75.2	-91.32	-7,476.1	518.7	870.1	720.7	149.37	5.825	
18,000.0	10,750.2	18,256.6	10,771.3	75.1	75.9	-91.32	-7,576.1	519.3	870.1	719.2	150.86	5.767	
18,100.0	10,750.3	18,356.6	10,771.4	75.9	76.6	-91.32	-7,676.1	520.0	870.1	717.7	152.35	5.711	
18,200.0	10,750.4	18,456.6	10,771.5	76.6	77.4	-91.32	-7,776.1	520.6	870.1	716.2	153.85	5.655	
18,300.0	10,750.5	18,556.6	10,771.6	77.4	78.1	-91.32	-7,876.1	521.3	870.1	714.7	155.35	5.601	
18,400.0	10,750.6	18,656.6	10,771.7	78.1	78.9	-91.32	-7,976.1	521.9	870.1	713.2	156.86	5.547	
18,500.0	10,750.8	18,756.6	10,771.8	78.9	79.7	-91.32	-8,076.1	522.6	870.1	711.7	158.37	5.494	
18,600.0	10,750.9	18,856.6	10,771.9	79.6	80.4	-91.32	-8,176.1	523.2	870.1	710.2	159.88	5.442	
18,700.0	10,751.0	18,956.6	10,772.0	80.4	81.2	-91.32	-8,276.1	523.9	870.1	708.7	161.40	5.391	
18,800.0	10,751.1	19,056.6	10,772.1	81.2	81.9	-91.32	-8,376.1	524.5	870.1	707.2	162.92	5.341	
18,900.0	10,751.2	19,156.6	10,772.2	81.9	82.7	-91.32	-8,476.1	525.2	870.1	705.7	164.45	5.291	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #701H - OWB - PWP1													Offset Site Error:	3.0 usft
Survey Program: 0-MWD+IFR1+FDIR													Offset Well Error:	3.0 usft
Reference		Offset		Semi Major Axis			Distance						Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
19,000.0	10,751.3	19,256.6	10,772.3	82.7	83.5	-91.32	-8,576.1	525.8	870.1	704.2	165.98	5.242		
19,100.0	10,751.4	19,356.6	10,772.4	83.4	84.2	-91.32	-8,676.1	526.5	870.1	702.6	167.52	5.194		
19,200.0	10,751.5	19,456.6	10,772.5	84.2	85.0	-91.32	-8,776.1	527.1	870.1	701.1	169.06	5.147		
19,300.0	10,751.6	19,556.6	10,772.6	85.0	85.8	-91.32	-8,876.1	527.8	870.2	699.6	170.60	5.101		
19,400.0	10,751.7	19,656.6	10,772.7	85.8	86.5	-91.32	-8,976.1	528.4	870.2	698.0	172.14	5.055		
19,500.0	10,751.8	19,756.6	10,772.8	86.5	87.3	-91.32	-9,076.1	529.0	870.2	696.5	173.69	5.010		
19,600.0	10,751.9	19,856.6	10,772.9	87.3	88.1	-91.32	-9,176.1	529.7	870.2	694.9	175.24	4.965		
19,700.0	10,752.0	19,956.6	10,773.0	88.1	88.9	-91.32	-9,276.1	530.3	870.2	693.4	176.80	4.922		
19,800.0	10,752.1	20,056.6	10,773.1	88.9	89.6	-91.32	-9,376.1	531.0	870.2	691.8	178.36	4.879		
19,900.0	10,752.2	20,156.6	10,773.2	89.6	90.4	-91.32	-9,476.1	531.6	870.2	690.3	179.92	4.837		
20,000.0	10,752.3	20,256.6	10,773.3	90.4	91.2	-91.32	-9,576.1	532.3	870.2	688.7	181.48	4.795		
20,100.0	10,752.4	20,356.6	10,773.4	91.2	92.0	-91.32	-9,676.1	532.9	870.2	687.1	183.05	4.754		
20,200.0	10,752.5	20,456.6	10,773.6	92.0	92.8	-91.32	-9,776.1	533.6	870.2	685.6	184.62	4.713		
20,300.0	10,752.6	20,556.6	10,773.7	92.8	93.6	-91.32	-9,876.1	534.2	870.2	684.0	186.19	4.674		
20,400.0	10,752.7	20,656.6	10,773.8	93.6	94.3	-91.32	-9,976.1	534.9	870.2	682.4	187.77	4.635		
20,500.0	10,752.9	20,756.6	10,773.9	94.3	95.1	-91.32	-10,076.1	535.5	870.2	680.9	189.35	4.596		
20,600.0	10,753.0	20,856.6	10,774.0	95.1	95.9	-91.32	-10,176.0	536.2	870.2	679.3	190.93	4.558		
20,639.4	10,753.0	20,896.0	10,774.0	95.4	96.2	-91.32	-10,215.5	536.4	870.2	678.8	191.46	4.545		
20,639.8	10,753.0	20,896.1	10,774.0	95.4	96.2	-91.32	-10,215.5	536.4	870.2	678.8	191.46	4.545		

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #703H - OWB - PWP1												Offset Site Error: 3.0 usft	
Survey Program: 0-Standard Keeper 104, 10239-MWD+IFR1+FDIR												Offset Well Error: 3.0 usft	
Reference		Offset		Semi Major Axis				Distance				Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)		Separation Factor
0.0	0.0	0.0	0.0	3.0	3.0	-90.46	-0.2	-29.9	29.9				
100.0	100.0	100.0	100.0	3.0	3.0	-90.46	-0.2	-29.9	29.9	23.9	6.00	4.986	
200.0	200.0	200.0	200.0	3.0	3.0	-90.46	-0.2	-29.9	29.9	23.9	6.04	4.955	
300.0	300.0	300.0	300.0	3.1	3.0	-90.46	-0.2	-29.9	29.9	23.8	6.12	4.889	
400.0	400.0	400.0	400.0	3.2	3.0	-90.46	-0.2	-29.9	29.9	23.7	6.24	4.795	
500.0	500.0	500.0	500.0	3.4	3.1	-90.46	-0.2	-29.9	29.9	23.5	6.40	4.677	
600.0	600.0	600.0	600.0	3.6	3.1	-90.46	-0.2	-29.9	29.9	23.3	6.59	4.544	
700.0	700.0	700.0	700.0	3.8	3.1	-90.46	-0.2	-29.9	29.9	23.1	6.80	4.400	
800.0	800.0	800.0	800.0	4.0	3.2	-90.46	-0.2	-29.9	29.9	22.9	7.04	4.252	
900.0	900.0	900.0	900.0	4.2	3.2	-90.46	-0.2	-29.9	29.9	22.6	7.30	4.101	
1,000.0	1,000.0	1,000.0	1,000.0	4.5	3.2	-90.46	-0.2	-29.9	29.9	22.4	7.57	3.953	
1,100.0	1,100.0	1,100.0	1,100.0	4.8	3.3	-90.46	-0.2	-29.9	29.9	22.1	7.86	3.807	
1,200.0	1,200.0	1,200.0	1,200.0	5.1	3.4	-90.46	-0.2	-29.9	29.9	21.8	8.16	3.667	
1,300.0	1,300.0	1,300.0	1,300.0	5.4	3.4	-90.46	-0.2	-29.9	29.9	21.5	8.47	3.532	
1,400.0	1,400.0	1,400.0	1,400.0	5.7	3.5	-90.46	-0.2	-29.9	29.9	21.1	8.79	3.403	
1,500.0	1,500.0	1,500.0	1,500.0	6.0	3.5	-90.46	-0.2	-29.9	29.9	20.8	9.12	3.281	
1,600.0	1,600.0	1,600.0	1,600.0	6.3	3.6	-90.46	-0.2	-29.9	29.9	20.5	9.46	3.165	
1,700.0	1,700.0	1,700.0	1,700.0	6.6	3.7	-90.46	-0.2	-29.9	29.9	20.1	9.80	3.054	
1,800.0	1,800.0	1,800.0	1,800.0	6.9	3.8	-90.46	-0.2	-29.9	29.9	19.8	10.15	2.950	
1,900.0	1,900.0	1,900.0	1,900.0	7.2	3.9	-90.46	-0.2	-29.9	29.9	19.4	10.50	2.851	
2,000.0	2,000.0	2,000.0	2,000.0	7.6	3.9	-90.46	-0.2	-29.9	29.9	19.1	10.85	2.758	
2,100.0	2,100.0	2,100.0	2,100.0	7.9	4.0	-90.46	-0.2	-29.9	29.9	18.7	11.21	2.669	
2,200.0	2,200.0	2,200.0	2,200.0	8.2	4.1	-90.46	-0.2	-29.9	29.9	18.4	11.58	2.586	
2,300.0	2,300.0	2,300.0	2,300.0	8.6	4.2	-90.46	-0.2	-29.9	29.9	18.0	11.94	2.506	
2,400.0	2,400.0	2,400.0	2,400.0	8.9	4.3	-90.46	-0.2	-29.9	29.9	17.6	12.31	2.431	
2,500.0	2,500.0	2,500.0	2,500.0	9.2	4.4	-90.46	-0.2	-29.9	29.9	17.2	12.68	2.360 CC, ES, SF	
2,600.0	2,600.0	2,599.0	2,599.0	9.6	4.4	-91.50	-0.8	-31.5	31.6	18.5	13.05	2.418	
2,700.0	2,700.0	2,697.7	2,697.6	9.9	4.5	-94.05	-2.6	-36.3	36.5	23.1	13.41	2.722	
2,800.0	2,800.0	2,796.0	2,795.5	10.3	4.5	-97.04	-5.5	-44.3	44.9	31.1	13.77	3.258	
2,900.0	2,900.0	2,895.4	2,894.3	10.6	4.5	-99.47	-9.0	-54.0	55.1	40.9	14.14	3.895	
3,000.0	3,000.0	2,994.9	2,993.2	10.9	4.5	-101.15	-12.6	-63.8	65.4	50.9	14.52	4.502	
3,100.0	3,100.0	3,094.3	3,092.2	11.3	4.5	-102.36	-16.1	-73.6	75.7	60.8	14.91	5.081	
3,200.0	3,200.0	3,193.8	3,191.1	11.6	4.6	-103.29	-19.7	-83.4	86.1	70.8	15.29	5.631	
3,300.0	3,300.0	3,293.2	3,290.0	12.0	4.6	-104.01	-23.2	-93.1	96.5	80.8	15.68	6.154	
3,400.0	3,400.0	3,392.7	3,388.9	12.3	4.6	-104.60	-26.8	-102.9	106.9	90.8	16.07	6.651	
3,500.0	3,500.0	3,492.1	3,487.8	12.7	4.7	-105.08	-30.4	-112.7	117.3	100.8	16.47	7.124	
3,600.0	3,600.0	3,591.6	3,586.7	13.0	4.7	-105.48	-33.9	-122.4	127.7	110.9	16.87	7.574	
3,700.0	3,700.0	3,691.0	3,685.6	13.4	4.7	-105.82	-37.5	-132.2	138.2	120.9	17.27	8.001	
3,800.0	3,800.0	3,790.5	3,784.5	13.7	4.8	-106.12	-41.0	-142.0	148.6	130.9	17.67	8.408	
3,900.0	3,900.0	3,889.9	3,883.4	14.1	4.9	-106.37	-44.6	-151.7	159.0	140.9	18.08	8.795	
4,000.0	4,000.0	3,989.4	3,982.3	14.4	4.9	-106.59	-48.1	-161.5	169.4	151.0	18.49	9.163	
4,100.0	4,100.0	4,088.8	4,081.2	14.8	5.0	-106.79	-51.7	-171.3	179.9	161.0	18.91	9.514	
4,200.0	4,200.0	4,188.3	4,180.1	15.1	5.0	-106.97	-55.2	-181.0	190.3	171.0	19.33	9.848	
4,300.0	4,300.0	4,287.7	4,279.0	15.5	5.1	-107.13	-58.8	-190.8	200.8	181.0	19.75	10.167	
4,400.0	4,400.0	4,387.2	4,377.9	15.8	5.2	-107.27	-62.4	-200.6	211.2	191.0	20.17	10.472	
4,500.0	4,500.0	4,486.6	4,476.9	16.2	5.2	-107.40	-65.9	-210.3	221.6	201.0	20.59	10.762	
4,600.0	4,600.0	4,586.1	4,575.8	16.5	5.3	-107.51	-69.5	-220.1	232.1	211.1	21.02	11.039	
4,700.0	4,700.0	4,685.5	4,674.7	16.9	5.4	-107.62	-73.0	-229.9	242.5	221.1	21.45	11.305	
4,800.0	4,800.0	4,785.0	4,773.6	17.2	5.5	-107.72	-76.6	-239.7	253.0	231.1	21.89	11.558	
4,900.0	4,900.0	4,884.5	4,872.5	17.6	5.5	-107.81	-80.1	-249.4	263.4	241.1	22.32	11.801	
5,000.0	5,000.0	4,983.9	4,971.4	17.9	5.6	-107.89	-83.7	-259.2	273.9	251.1	22.76	12.033	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #703H - OWB - PWP1												Offset Site Error:	3.0 usft
Survey Program: 0-Standard Keeper 104, 10239-MWD+IFR1+FDIR												Offset Well Error:	3.0 usft
Reference	Offset	Semi Major Axis		Distance									
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
5,100.0	5,100.0	5,083.4	5,070.3	18.3	5.7	-107.97	-87.2	-269.0	284.3	261.1	23.20	12.255	
5,200.0	5,200.0	5,182.8	5,169.2	18.7	5.8	-108.04	-90.8	-278.7	294.8	271.1	23.64	12.468	
5,300.0	5,300.0	5,282.3	5,268.1	19.0	5.9	-108.11	-94.4	-288.5	305.2	281.1	24.08	12.673	
5,400.0	5,400.0	5,381.7	5,367.0	19.4	6.0	-108.17	-97.9	-298.3	315.7	291.1	24.53	12.869	
5,500.0	5,500.0	5,481.2	5,465.9	19.7	6.1	-108.23	-101.5	-308.0	326.1	301.1	24.97	13.058	
5,600.0	5,600.0	5,580.8	5,565.0	20.1	6.2	-3.29	-105.0	-317.8	334.8	309.4	25.41	13.176	
5,700.0	5,699.8	5,680.6	5,664.3	20.4	6.3	-3.39	-108.6	-327.6	340.0	314.2	25.84	13.162	
5,730.0	5,729.8	5,710.6	5,694.1	20.5	6.3	-3.43	-109.7	-330.6	340.9	315.0	25.96	13.131	
5,800.0	5,799.5	5,780.6	5,763.7	20.7	6.4	-3.52	-112.2	-337.4	342.7	316.4	26.26	13.047	
5,900.0	5,899.2	5,880.6	5,863.1	21.1	6.5	-3.64	-115.7	-347.3	345.1	318.4	26.69	12.928	
6,000.0	5,998.9	5,980.5	5,962.6	21.4	6.6	-3.77	-119.3	-357.1	347.6	320.4	27.13	12.813	
6,100.0	6,098.6	6,080.5	6,062.0	21.7	6.7	-3.89	-122.9	-366.9	350.0	322.5	27.56	12.700	
6,200.0	6,198.2	6,180.5	6,161.4	22.1	6.8	-4.01	-126.5	-376.7	352.5	324.5	28.00	12.590	
6,300.0	6,297.9	6,280.4	6,260.8	22.4	6.9	-4.13	-130.0	-386.5	355.0	326.5	28.44	12.483	
6,400.0	6,397.6	6,380.4	6,360.2	22.8	7.0	-4.25	-133.6	-396.4	357.4	328.5	28.88	12.378	
6,500.0	6,497.3	6,480.4	6,459.7	23.1	7.1	-4.36	-137.2	-406.2	359.9	330.6	29.32	12.276	
6,600.0	6,597.0	6,580.3	6,559.1	23.4	7.2	-4.48	-140.8	-416.0	362.4	332.6	29.76	12.176	
6,700.0	6,696.6	6,680.3	6,658.5	23.8	7.3	-4.59	-144.3	-425.8	364.8	334.6	30.20	12.079	
6,800.0	6,796.3	6,780.3	6,757.9	24.1	7.4	-4.70	-147.9	-435.6	367.3	336.6	30.65	11.984	
6,900.0	6,896.0	6,880.2	6,857.3	24.5	7.5	-4.81	-151.5	-445.5	369.8	338.7	31.10	11.891	
7,000.0	6,995.7	6,980.2	6,956.8	24.8	7.6	-4.92	-155.1	-455.3	372.2	340.7	31.54	11.800	
7,100.0	7,095.3	7,080.2	7,056.2	25.1	7.7	-5.03	-158.6	-465.1	374.7	342.7	31.99	11.712	
7,200.0	7,195.0	7,180.1	7,155.6	25.5	7.8	-5.14	-162.2	-474.9	377.2	344.7	32.44	11.626	
7,300.0	7,294.7	7,280.1	7,255.0	25.8	7.9	-5.24	-165.8	-484.7	379.7	346.8	32.90	11.541	
7,400.0	7,394.4	7,380.1	7,354.4	26.2	8.0	-5.34	-169.3	-494.6	382.1	348.8	33.35	11.459	
7,500.0	7,494.1	7,480.0	7,453.8	26.5	8.2	-5.45	-172.9	-504.4	384.6	350.8	33.80	11.378	
7,600.0	7,593.7	7,580.0	7,553.3	26.9	8.3	-5.55	-176.5	-514.2	387.1	352.8	34.26	11.300	
7,700.0	7,693.4	7,680.0	7,652.7	27.2	8.4	-5.65	-180.1	-524.0	389.6	354.9	34.71	11.223	
7,800.0	7,793.1	7,779.9	7,752.1	27.6	8.5	-5.74	-183.6	-533.8	392.1	356.9	35.17	11.148	
7,900.0	7,892.8	7,879.9	7,851.5	27.9	8.6	-5.84	-187.2	-543.6	394.5	358.9	35.63	11.074	
8,000.0	7,992.4	7,979.9	7,950.9	28.3	8.7	-5.94	-190.8	-553.5	397.0	360.9	36.08	11.003	
8,100.0	8,092.1	8,079.8	8,050.4	28.6	8.8	-6.03	-194.4	-563.3	399.5	363.0	36.54	10.932	
8,200.0	8,191.8	8,179.8	8,149.8	29.0	9.0	-6.12	-197.9	-573.1	402.0	365.0	37.00	10.864	
8,300.0	8,291.5	8,279.8	8,249.2	29.3	9.1	-6.21	-201.5	-582.9	404.5	367.0	37.46	10.796	
8,400.0	8,391.2	8,379.7	8,348.6	29.7	9.2	-6.31	-205.1	-592.7	407.0	369.0	37.93	10.731	
8,500.0	8,490.8	8,479.7	8,448.0	30.0	9.3	-6.40	-208.7	-602.6	409.5	371.1	38.39	10.666	
8,600.0	8,590.5	8,579.7	8,547.5	30.4	9.4	-6.48	-212.2	-612.4	412.0	373.1	38.85	10.603	
8,700.0	8,690.2	8,679.6	8,646.9	30.7	9.6	-6.57	-215.8	-622.2	414.4	375.1	39.31	10.542	
8,800.0	8,789.9	8,779.6	8,746.3	31.1	9.7	-6.66	-219.4	-632.0	416.9	377.2	39.78	10.481	
8,900.0	8,889.5	8,879.6	8,845.7	31.4	9.8	-6.74	-223.0	-641.8	419.4	379.2	40.24	10.422	
9,000.0	8,989.2	8,979.5	8,945.1	31.8	9.9	-6.83	-226.5	-651.7	421.9	381.2	40.71	10.365	
9,100.0	9,088.9	9,079.5	9,044.6	32.1	10.0	-6.91	-230.1	-661.5	424.4	383.2	41.17	10.308	
9,200.0	9,188.6	9,179.5	9,144.0	32.5	10.2	-6.99	-233.7	-671.3	426.9	385.3	41.64	10.252	
9,300.0	9,288.3	9,279.4	9,243.4	32.8	10.3	-7.08	-237.3	-681.1	429.4	387.3	42.11	10.198	
9,400.0	9,387.9	9,379.4	9,342.8	33.2	10.4	-7.16	-240.8	-690.9	431.9	389.3	42.57	10.145	
9,500.0	9,487.6	9,479.4	9,442.2	33.5	10.5	-7.24	-244.4	-700.8	434.4	391.4	43.04	10.092	
9,600.0	9,587.3	9,579.3	9,541.7	33.9	10.7	-7.32	-248.0	-710.6	436.9	393.4	43.51	10.041	
9,700.0	9,687.0	9,679.3	9,641.1	34.2	10.8	-7.39	-251.5	-720.4	439.4	395.4	43.98	9.991	
9,800.0	9,786.6	9,779.3	9,740.5	34.6	10.9	-7.47	-255.1	-730.2	441.9	397.5	44.45	9.942	
9,900.0	9,886.3	9,879.2	9,839.9	34.9	11.0	-7.55	-258.7	-740.0	444.4	399.5	44.92	9.894	
10,000.0	9,986.0	9,979.2	9,939.3	35.3	11.2	-7.62	-262.3	-749.9	446.9	401.5	45.39	9.846	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #703H - OWB - PWP1													Offset Site Error:	3.0 usft
Survey Program: 0-Standard Keeper 104, 10239-MWD+IFR1+FDIR													Offset Well Error:	3.0 usft
Reference	Offset	Semi Major Axis		Distance										Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
10,100.0	10,085.7	10,079.2	10,038.8	35.7	11.3	-7.70	-265.8	-759.7	449.4	403.6	45.86	9.800		
10,197.9	10,183.3	10,177.1	10,136.1	36.0	11.4	-7.77	-269.3	-769.3	451.9	405.6	46.32	9.755		
10,200.0	10,185.4	10,179.1	10,138.2	36.0	11.4	-5.32	-269.4	-769.5	451.9	405.6	46.33	9.754		
10,250.0	10,235.1	10,229.1	10,187.8	36.2	11.5	32.78	-271.2	-774.4	452.3	405.7	46.56	9.715		
10,300.0	10,284.3	10,264.5	10,223.0	36.4	11.5	46.82	-273.0	-778.1	451.7	405.0	46.69	9.673		
10,350.0	10,332.7	10,300.0	10,258.0	36.5	11.5	53.63	-276.7	-782.6	451.5	404.6	46.83	9.640		
10,354.9	10,337.3	10,300.0	10,258.0	36.5	11.5	54.05	-276.7	-782.6	451.4	404.6	46.83	9.639		
10,400.0	10,379.8	10,328.1	10,285.5	36.7	11.5	57.67	-281.1	-786.8	451.7	404.8	46.96	9.619		
10,450.0	10,425.4	10,359.9	10,316.1	36.8	11.5	60.64	-287.5	-792.1	452.6	405.5	47.11	9.607		
10,500.0	10,469.1	10,400.0	10,354.1	37.0	11.5	63.31	-297.8	-799.8	454.2	406.9	47.31	9.602		
10,550.0	10,510.4	10,423.3	10,375.7	37.1	11.5	65.04	-305.0	-804.7	456.4	409.0	47.45	9.619		
10,600.0	10,549.2	10,450.0	10,400.1	37.3	11.6	66.63	-314.1	-810.7	459.7	412.0	47.62	9.652		
10,650.0	10,585.2	10,486.6	10,432.6	37.4	11.6	68.53	-328.4	-819.6	463.8	415.9	47.84	9.694		
10,700.0	10,618.0	10,518.2	10,459.7	37.5	11.6	70.07	-342.3	-827.9	469.0	421.0	48.05	9.761		
10,750.0	10,647.3	10,550.0	10,486.1	37.6	11.6	71.52	-357.6	-836.7	475.4	427.2	48.27	9.849		
10,800.0	10,673.1	10,581.4	10,511.2	37.7	11.6	72.82	-374.1	-846.0	483.1	434.6	48.50	9.960		
10,850.0	10,695.1	10,613.0	10,535.4	37.8	11.7	74.03	-392.0	-855.7	492.1	443.3	48.74	10.096		
10,900.0	10,713.0	10,650.0	10,562.2	37.9	11.7	75.44	-414.4	-867.7	502.4	453.4	48.99	10.256		
10,950.0	10,726.9	10,676.6	10,580.4	38.0	11.7	76.07	-431.6	-876.7	514.1	464.9	49.21	10.446		
11,000.0	10,736.5	10,708.6	10,601.2	38.1	11.8	76.90	-453.3	-887.8	527.2	477.7	49.44	10.663		
11,050.0	10,741.8	10,740.9	10,620.7	38.2	11.8	77.58	-476.2	-899.4	541.6	492.0	49.66	10.907		
11,085.7	10,743.0	10,764.2	10,633.8	38.2	11.9	77.99	-493.4	-908.0	552.8	503.0	49.81	11.098		
11,100.0	10,743.0	10,773.6	10,638.9	38.2	11.9	78.61	-500.6	-911.5	557.4	507.6	49.87	11.178		
11,200.0	10,743.1	10,846.0	10,673.7	38.4	12.1	82.75	-557.7	-939.2	593.5	543.2	50.28	11.804		
11,300.0	10,743.2	10,929.1	10,703.4	38.5	12.3	86.08	-627.8	-972.1	633.2	582.5	50.71	12.486		
11,400.0	10,743.3	11,021.2	10,722.9	38.7	12.5	88.13	-709.6	-1,009.3	674.2	623.0	51.20	13.167		
11,500.0	10,743.4	11,123.5	10,728.0	38.9	12.9	88.69	-803.2	-1,050.2	714.8	663.0	51.77	13.808		
11,600.0	10,743.5	11,248.1	10,728.2	39.1	13.4	88.77	-918.9	-1,096.3	752.4	699.9	52.49	14.333		
11,700.0	10,743.6	11,376.9	10,728.3	39.3	14.0	88.85	-1,040.6	-1,138.6	785.8	732.5	53.30	14.742		
11,800.0	10,743.7	11,509.7	10,728.4	39.6	14.7	88.90	-1,167.8	-1,176.5	814.9	760.7	54.19	15.038		
11,900.0	10,743.8	11,646.0	10,728.6	39.8	15.4	88.95	-1,300.1	-1,209.1	839.5	784.4	55.15	15.224		
12,000.0	10,743.9	11,785.3	10,728.7	40.1	16.2	88.98	-1,436.8	-1,236.0	859.4	803.3	56.15	15.307		
12,100.0	10,744.0	11,927.0	10,728.9	40.4	17.0	89.01	-1,577.1	-1,256.4	874.5	817.3	57.18	15.294		
12,200.0	10,744.1	12,070.6	10,729.0	40.7	17.9	89.02	-1,720.0	-1,270.1	884.6	826.4	58.23	15.192		
12,300.0	10,744.2	12,215.3	10,729.2	41.0	18.8	89.03	-1,864.5	-1,276.5	889.8	830.5	59.28	15.008		
12,400.0	10,744.3	12,338.4	10,729.3	41.4	19.5	89.03	-1,987.6	-1,276.7	890.4	830.1	60.31	14.765		
12,500.0	10,744.4	12,438.4	10,729.4	41.7	20.2	89.03	-2,087.6	-1,276.1	890.4	829.1	61.32	14.520		
12,600.0	10,744.6	12,538.4	10,729.5	42.1	20.8	89.03	-2,187.6	-1,275.4	890.4	828.0	62.37	14.276		
12,700.0	10,744.7	12,638.4	10,729.6	42.5	21.5	89.03	-2,287.6	-1,274.8	890.4	827.0	63.44	14.034		
12,800.0	10,744.8	12,738.4	10,729.8	42.9	22.2	89.03	-2,387.6	-1,274.1	890.4	825.9	64.55	13.795		
12,900.0	10,744.9	12,838.4	10,729.9	43.3	22.9	89.03	-2,487.6	-1,273.5	890.4	824.7	65.67	13.559		
13,000.0	10,745.0	12,938.4	10,730.0	43.7	23.6	89.03	-2,587.6	-1,272.8	890.4	823.6	66.82	13.325		
13,100.0	10,745.1	13,038.4	10,730.1	44.2	24.3	89.03	-2,687.6	-1,272.2	890.4	822.4	67.99	13.096		
13,200.0	10,745.2	13,138.4	10,730.2	44.6	25.0	89.03	-2,787.6	-1,271.6	890.4	821.2	69.18	12.870		
13,300.0	10,745.3	13,238.4	10,730.3	45.1	25.8	89.03	-2,887.6	-1,270.9	890.4	820.0	70.39	12.649		
13,400.0	10,745.4	13,338.4	10,730.4	45.5	26.5	89.03	-2,987.6	-1,270.3	890.4	818.8	71.62	12.432		
13,500.0	10,745.5	13,438.4	10,730.5	46.0	27.3	89.03	-3,087.6	-1,269.6	890.4	817.5	72.87	12.219		
13,600.0	10,745.6	13,538.4	10,730.6	46.5	28.0	89.03	-3,187.6	-1,269.0	890.4	816.2	74.13	12.011		
13,700.0	10,745.7	13,638.4	10,730.7	47.0	28.8	89.03	-3,287.6	-1,268.3	890.4	815.0	75.41	11.807		
13,800.0	10,745.8	13,738.4	10,730.8	47.5	29.5	89.03	-3,387.6	-1,267.7	890.4	813.7	76.71	11.608		
13,900.0	10,745.9	13,838.4	10,730.9	48.1	30.3	89.03	-3,487.6	-1,267.0	890.4	812.4	78.01	11.413		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #703H - OWB - PWP1													Offset Site Error:	3.0 usft
Survey Program: 0-Standard Keeper 104, 10239-MWD+IFR1+FDIR													Offset Well Error:	3.0 usft
Reference	Offset	Semi Major Axis		Distance										Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
14,000.0	10,746.0	13,938.4	10,731.0	48.6	31.1	89.03	-3,587.6	-1,266.4	890.4	811.0	79.34	11.222		
14,100.0	10,746.1	14,038.4	10,731.1	49.1	31.9	89.03	-3,687.6	-1,265.7	890.4	809.7	80.67	11.037		
14,200.0	10,746.2	14,138.4	10,731.2	49.7	32.7	89.03	-3,787.6	-1,265.1	890.4	808.3	82.02	10.855		
14,300.0	10,746.3	14,238.4	10,731.3	50.3	33.4	89.03	-3,887.6	-1,264.4	890.4	807.0	83.38	10.678		
14,400.0	10,746.4	14,338.4	10,731.4	50.8	34.2	89.03	-3,987.6	-1,263.8	890.3	805.6	84.75	10.505		
14,500.0	10,746.5	14,438.4	10,731.5	51.4	35.0	89.03	-4,087.6	-1,263.2	890.3	804.2	86.14	10.336		
14,600.0	10,746.7	14,538.4	10,731.6	52.0	35.8	89.03	-4,187.6	-1,262.5	890.3	802.8	87.53	10.172		
14,700.0	10,746.8	14,638.4	10,731.8	52.6	36.6	89.03	-4,287.6	-1,261.9	890.3	801.4	88.94	10.011		
14,800.0	10,746.9	14,738.4	10,731.9	53.2	37.4	89.03	-4,387.6	-1,261.2	890.3	800.0	90.35	9.854		
14,900.0	10,747.0	14,838.4	10,732.0	53.8	38.3	89.03	-4,487.6	-1,260.6	890.3	798.6	91.77	9.702		
15,000.0	10,747.1	14,938.4	10,732.1	54.4	39.1	89.03	-4,587.6	-1,259.9	890.3	797.1	93.20	9.553		
15,100.0	10,747.2	15,038.4	10,732.2	55.0	39.9	89.03	-4,687.6	-1,259.3	890.3	795.7	94.64	9.407		
15,200.0	10,747.3	15,138.4	10,732.3	55.6	40.7	89.03	-4,787.6	-1,258.6	890.3	794.2	96.09	9.265		
15,300.0	10,747.4	15,238.4	10,732.4	56.3	41.5	89.03	-4,887.6	-1,258.0	890.3	792.8	97.55	9.127		
15,400.0	10,747.5	15,338.4	10,732.5	56.9	42.3	89.03	-4,987.6	-1,257.3	890.3	791.3	99.01	8.992		
15,500.0	10,747.6	15,438.4	10,732.6	57.6	43.1	89.03	-5,087.6	-1,256.7	890.3	789.8	100.48	8.860		
15,600.0	10,747.7	15,538.4	10,732.7	58.2	44.0	89.03	-5,187.6	-1,256.1	890.3	788.3	101.96	8.732		
15,700.0	10,747.8	15,638.4	10,732.8	58.9	44.8	89.03	-5,287.6	-1,255.4	890.3	786.9	103.44	8.606		
15,800.0	10,747.9	15,738.4	10,732.9	59.5	45.6	89.03	-5,387.6	-1,254.8	890.3	785.4	104.94	8.484		
15,900.0	10,748.0	15,838.4	10,733.0	60.2	46.4	89.03	-5,487.6	-1,254.1	890.3	783.9	106.43	8.365		
16,000.0	10,748.1	15,938.4	10,733.1	60.9	47.3	89.03	-5,587.6	-1,253.5	890.3	782.3	107.94	8.248		
16,100.0	10,748.2	16,038.4	10,733.2	61.6	48.1	89.03	-5,687.6	-1,252.8	890.3	780.8	109.45	8.134		
16,200.0	10,748.3	16,138.4	10,733.3	62.2	48.9	89.03	-5,787.6	-1,252.2	890.3	779.3	110.96	8.023		
16,300.0	10,748.4	16,238.4	10,733.4	62.9	49.8	89.03	-5,887.6	-1,251.5	890.3	777.8	112.48	7.915		
16,400.0	10,748.5	16,338.4	10,733.5	63.6	50.6	89.03	-5,987.6	-1,250.9	890.3	776.3	114.01	7.809		
16,500.0	10,748.6	16,438.4	10,733.6	64.3	51.4	89.03	-6,087.6	-1,250.2	890.3	774.7	115.54	7.705		
16,600.0	10,748.8	16,538.4	10,733.8	65.0	52.3	89.03	-6,187.6	-1,249.6	890.3	773.2	117.07	7.604		
16,700.0	10,748.9	16,638.4	10,733.9	65.7	53.1	89.03	-6,287.6	-1,249.0	890.3	771.6	118.61	7.506		
16,800.0	10,749.0	16,738.4	10,734.0	66.4	53.9	89.03	-6,387.5	-1,248.3	890.3	770.1	120.16	7.409		
16,900.0	10,749.1	16,838.4	10,734.1	67.1	54.8	89.03	-6,487.5	-1,247.7	890.3	768.5	121.71	7.315		
17,000.0	10,749.2	16,938.4	10,734.2	67.8	55.6	89.03	-6,587.5	-1,247.0	890.2	767.0	123.26	7.223		
17,100.0	10,749.3	17,038.4	10,734.3	68.5	56.4	89.03	-6,687.5	-1,246.4	890.2	765.4	124.82	7.132		
17,200.0	10,749.4	17,138.4	10,734.4	69.3	57.3	89.03	-6,787.5	-1,245.7	890.2	763.9	126.38	7.044		
17,300.0	10,749.5	17,238.4	10,734.5	70.0	58.1	89.03	-6,887.5	-1,245.1	890.2	762.3	127.94	6.958		
17,400.0	10,749.6	17,338.4	10,734.6	70.7	59.0	89.03	-6,987.5	-1,244.4	890.2	760.7	129.51	6.874		
17,500.0	10,749.7	17,438.4	10,734.7	71.4	59.8	89.03	-7,087.5	-1,243.8	890.2	759.1	131.08	6.791		
17,600.0	10,749.8	17,538.4	10,734.8	72.2	60.6	89.03	-7,187.5	-1,243.1	890.2	757.6	132.66	6.711		
17,700.0	10,749.9	17,638.4	10,734.9	72.9	61.5	89.03	-7,287.5	-1,242.5	890.2	756.0	134.24	6.632		
17,800.0	10,750.0	17,738.4	10,735.0	73.6	62.3	89.03	-7,387.5	-1,241.9	890.2	754.4	135.82	6.554		
17,900.0	10,750.1	17,838.4	10,735.1	74.4	63.2	89.03	-7,487.5	-1,241.2	890.2	752.8	137.40	6.479		
18,000.0	10,750.2	17,938.4	10,735.2	75.1	64.0	89.03	-7,587.5	-1,240.6	890.2	751.2	138.99	6.405		
18,100.0	10,750.3	18,038.4	10,735.3	75.9	64.8	89.03	-7,687.5	-1,239.9	890.2	749.6	140.58	6.332		
18,200.0	10,750.4	18,138.4	10,735.4	76.6	65.7	89.03	-7,787.5	-1,239.3	890.2	748.0	142.18	6.261		
18,300.0	10,750.5	18,238.4	10,735.5	77.4	66.5	89.03	-7,887.5	-1,238.6	890.2	746.4	143.77	6.192		
18,400.0	10,750.6	18,338.4	10,735.6	78.1	67.4	89.03	-7,987.5	-1,238.0	890.2	744.8	145.37	6.123		
18,500.0	10,750.8	18,438.4	10,735.7	78.9	68.2	89.03	-8,087.5	-1,237.3	890.2	743.2	146.98	6.057		
18,600.0	10,750.9	18,538.4	10,735.9	79.6	69.1	89.03	-8,187.5	-1,236.7	890.2	741.6	148.58	5.991		
18,700.0	10,751.0	18,638.4	10,736.0	80.4	69.9	89.03	-8,287.5	-1,236.0	890.2	740.0	150.19	5.927		
18,800.0	10,751.1	18,738.4	10,736.1	81.2	70.8	89.03	-8,387.5	-1,235.4	890.2	738.4	151.80	5.864		
18,900.0	10,751.2	18,838.4	10,736.2	81.9	71.6	89.03	-8,487.5	-1,234.7	890.2	736.8	153.41	5.803		
19,000.0	10,751.3	18,938.4	10,736.3	82.7	72.5	89.03	-8,587.5	-1,234.1	890.2	735.2	155.02	5.742		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #703H - OWB - PWP1												Offset Site Error:	3.0 usft
Survey Program: 0-Standard Keeper 104, 10239-MWD+IFR1+FDIR												Offset Well Error:	3.0 usft
Reference		Offset		Semi Major Axis		Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
19,100.0	10,751.4	19,038.4	10,736.4	83.4	73.3	89.03	-8,687.5	-1,233.5	890.2	733.5	156.64	5.683	
19,200.0	10,751.5	19,138.4	10,736.5	84.2	74.2	89.03	-8,787.5	-1,232.8	890.2	731.9	158.26	5.625	
19,300.0	10,751.6	19,238.4	10,736.6	85.0	75.0	89.03	-8,887.5	-1,232.2	890.2	730.3	159.88	5.568	
19,400.0	10,751.7	19,338.4	10,736.7	85.8	75.9	89.03	-8,987.5	-1,231.5	890.2	728.7	161.50	5.512	
19,500.0	10,751.8	19,438.4	10,736.8	86.5	76.7	89.03	-9,087.5	-1,230.9	890.2	727.0	163.12	5.457	
19,600.0	10,751.9	19,538.4	10,736.9	87.3	77.6	89.03	-9,187.5	-1,230.2	890.2	725.4	164.75	5.403	
19,700.0	10,752.0	19,638.4	10,737.0	88.1	78.4	89.03	-9,287.5	-1,229.6	890.1	723.8	166.38	5.350	
19,800.0	10,752.1	19,738.4	10,737.1	88.9	79.3	89.03	-9,387.5	-1,228.9	890.1	722.1	168.01	5.298	
19,900.0	10,752.2	19,838.4	10,737.2	89.6	80.1	89.03	-9,487.5	-1,228.3	890.1	720.5	169.64	5.247	
20,000.0	10,752.3	19,938.4	10,737.3	90.4	81.0	89.03	-9,587.5	-1,227.6	890.1	718.9	171.27	5.197	
20,100.0	10,752.4	20,038.4	10,737.4	91.2	81.8	89.03	-9,687.5	-1,227.0	890.1	717.2	172.91	5.148	
20,200.0	10,752.5	20,138.4	10,737.5	92.0	82.7	89.03	-9,787.5	-1,226.4	890.1	715.6	174.54	5.100	
20,300.0	10,752.6	20,238.4	10,737.6	92.8	83.5	89.03	-9,887.5	-1,225.7	890.1	713.9	176.18	5.052	
20,400.0	10,752.7	20,338.4	10,737.7	93.6	84.4	89.03	-9,987.5	-1,225.1	890.1	712.3	177.82	5.006	
20,500.0	10,752.9	20,438.4	10,737.9	94.3	85.2	89.03	-10,087.5	-1,224.4	890.1	710.7	179.46	4.960	
20,600.0	10,753.0	20,538.4	10,738.0	95.1	86.1	89.03	-10,187.5	-1,223.8	890.1	709.0	181.11	4.915	
20,634.3	10,753.0	20,572.8	10,738.0	95.3	86.3	89.03	-10,221.8	-1,223.6	890.1	708.5	181.59	4.902	
20,639.4	10,753.0	20,577.8	10,738.0	95.4	86.4	89.03	-10,226.8	-1,223.5	890.1	708.4	181.67	4.900	
20,639.8	10,753.0	20,577.8	10,738.0	95.4	86.4	89.03	-10,226.8	-1,223.5	890.1	708.4	181.67	4.900	

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #801H - OWB - PWP0												Offset Site Error:	3.0 usft
Survey Program: 0-Standard Keeper 104, 10877-MWD+IFR1+FDIR												Offset Well Error:	3.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Semi Major Axis Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
0.0	0.0	2.0	2.0	3.0	3.0	-90.48	-1.9	-230.0	230.0				
100.0	100.0	102.0	102.0	3.0	3.0	-90.48	-1.9	-230.0	230.0	224.0	6.00	38.321	
200.0	200.0	202.0	202.0	3.0	3.0	-90.48	-1.9	-230.0	230.0	224.0	6.04	38.078	
300.0	300.0	302.0	302.0	3.1	3.0	-90.48	-1.9	-230.0	230.0	223.9	6.12	37.575	
400.0	400.0	402.0	402.0	3.2	3.0	-90.48	-1.9	-230.0	230.0	223.8	6.24	36.849	
500.0	500.0	502.0	502.0	3.4	3.1	-90.48	-1.9	-230.0	230.0	223.6	6.40	35.949	
600.0	600.0	602.0	602.0	3.6	3.1	-90.48	-1.9	-230.0	230.0	223.5	6.59	34.924	
700.0	700.0	702.0	702.0	3.8	3.1	-90.48	-1.9	-230.0	230.0	223.2	6.80	33.820	
800.0	800.0	802.0	802.0	4.0	3.2	-90.48	-1.9	-230.0	230.0	223.0	7.04	32.675	
900.0	900.0	902.0	902.0	4.2	3.2	-90.48	-1.9	-230.0	230.0	222.7	7.30	31.520	
1,000.0	1,000.0	1,002.0	1,002.0	4.5	3.2	-90.48	-1.9	-230.0	230.0	222.5	7.57	30.377	
1,100.0	1,100.0	1,102.0	1,102.0	4.8	3.3	-90.48	-1.9	-230.0	230.0	222.2	7.86	29.261	
1,200.0	1,200.0	1,202.0	1,202.0	5.1	3.4	-90.48	-1.9	-230.0	230.0	221.9	8.16	28.182	
1,300.0	1,300.0	1,302.0	1,302.0	5.4	3.4	-90.48	-1.9	-230.0	230.0	221.6	8.47	27.146	
1,400.0	1,400.0	1,402.0	1,402.0	5.7	3.5	-90.48	-1.9	-230.0	230.0	221.2	8.79	26.157	
1,500.0	1,500.0	1,502.0	1,502.0	6.0	3.5	-90.48	-1.9	-230.0	230.0	220.9	9.12	25.215	
1,600.0	1,600.0	1,602.0	1,602.0	6.3	3.6	-90.48	-1.9	-230.0	230.0	220.6	9.46	24.322	
1,700.0	1,700.0	1,702.0	1,702.0	6.6	3.7	-90.48	-1.9	-230.0	230.0	220.2	9.80	23.475	
1,800.0	1,800.0	1,802.0	1,802.0	6.9	3.8	-90.48	-1.9	-230.0	230.0	219.9	10.15	22.673	
1,900.0	1,900.0	1,902.0	1,902.0	7.2	3.9	-90.48	-1.9	-230.0	230.0	219.5	10.50	21.914	
2,000.0	2,000.0	2,002.0	2,002.0	7.6	3.9	-90.48	-1.9	-230.0	230.0	219.2	10.85	21.196	
2,100.0	2,100.0	2,102.0	2,102.0	7.9	4.0	-90.48	-1.9	-230.0	230.0	218.8	11.21	20.516	
2,200.0	2,200.0	2,202.0	2,202.0	8.2	4.1	-90.48	-1.9	-230.0	230.0	218.5	11.58	19.872	
2,300.0	2,300.0	2,302.0	2,302.0	8.6	4.2	-90.48	-1.9	-230.0	230.0	218.1	11.94	19.262	
2,400.0	2,400.0	2,402.0	2,402.0	8.9	4.3	-90.48	-1.9	-230.0	230.0	217.7	12.31	18.684	
2,500.0	2,500.0	2,502.0	2,502.0	9.2	4.4	-90.48	-1.9	-230.0	230.0	217.4	12.68	18.136	
2,600.0	2,600.0	2,602.0	2,602.0	9.6	4.5	-90.48	-1.9	-230.0	230.0	217.0	13.06	17.616	
2,700.0	2,700.0	2,702.0	2,702.0	9.9	4.6	-90.48	-1.9	-230.0	230.0	216.6	13.44	17.121	
2,800.0	2,800.0	2,802.0	2,802.0	10.3	4.7	-90.48	-1.9	-230.0	230.0	216.2	13.81	16.651	
2,900.0	2,900.0	2,902.0	2,902.0	10.6	4.8	-90.48	-1.9	-230.0	230.0	215.8	14.20	16.204	
3,000.0	3,000.0	3,002.0	3,002.0	10.9	4.9	-90.48	-1.9	-230.0	230.0	215.5	14.58	15.778	
3,100.0	3,100.0	3,102.0	3,102.0	11.3	5.0	-90.48	-1.9	-230.0	230.0	215.1	14.96	15.372	
3,200.0	3,200.0	3,202.0	3,202.0	11.6	5.1	-90.48	-1.9	-230.0	230.0	214.7	15.35	14.985	
3,300.0	3,300.0	3,302.0	3,302.0	12.0	5.2	-90.48	-1.9	-230.0	230.0	214.3	15.74	14.615	
3,400.0	3,400.0	3,402.0	3,402.0	12.3	5.3	-90.48	-1.9	-230.0	230.0	213.9	16.13	14.262	
3,500.0	3,500.0	3,502.0	3,502.0	12.7	5.4	-90.48	-1.9	-230.0	230.0	213.5	16.52	13.924	
3,600.0	3,600.0	3,602.0	3,602.0	13.0	5.5	-90.48	-1.9	-230.0	230.0	213.1	16.91	13.601	
3,700.0	3,700.0	3,702.0	3,702.0	13.4	5.7	-90.48	-1.9	-230.0	230.0	212.7	17.31	13.292	
3,800.0	3,800.0	3,802.0	3,802.0	13.7	5.8	-90.48	-1.9	-230.0	230.0	212.3	17.70	12.995	
3,900.0	3,900.0	3,902.0	3,902.0	14.1	5.9	-90.48	-1.9	-230.0	230.0	211.9	18.10	12.711	
4,000.0	4,000.0	4,002.0	4,002.0	14.4	6.0	-90.48	-1.9	-230.0	230.0	211.5	18.50	12.438	
4,100.0	4,100.0	4,102.0	4,102.0	14.8	6.1	-90.48	-1.9	-230.0	230.0	211.1	18.89	12.175	
4,200.0	4,200.0	4,202.0	4,202.0	15.1	6.2	-90.48	-1.9	-230.0	230.0	210.7	19.29	11.923	
4,300.0	4,300.0	4,302.0	4,302.0	15.5	6.3	-90.48	-1.9	-230.0	230.0	210.3	19.69	11.681	
4,400.0	4,400.0	4,402.0	4,402.0	15.8	6.5	-90.48	-1.9	-230.0	230.0	209.9	20.09	11.448	
4,500.0	4,500.0	4,502.0	4,502.0	16.2	6.6	-90.48	-1.9	-230.0	230.0	209.5	20.50	11.223	
4,600.0	4,600.0	4,602.0	4,602.0	16.5	6.7	-90.48	-1.9	-230.0	230.0	209.1	20.90	11.007	
4,700.0	4,700.0	4,702.0	4,702.0	16.9	6.8	-90.48	-1.9	-230.0	230.0	208.7	21.30	10.798	
4,800.0	4,800.0	4,802.0	4,802.0	17.2	6.9	-90.48	-1.9	-230.0	230.0	208.3	21.71	10.597	
4,900.0	4,900.0	4,902.0	4,902.0	17.6	7.0	-90.48	-1.9	-230.0	230.0	207.9	22.11	10.403	
5,000.0	5,000.0	5,002.0	5,002.0	17.9	7.2	-90.48	-1.9	-230.0	230.0	207.5	22.52	10.216	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #801H - OWB - PWP0												Offset Site Error:	3.0 usft
Survey Program: 0-Standard Keeper 104, 10877-MWD+IFR1+FDIR												Offset Well Error:	3.0 usft
Reference	Offset	Semi Major Axis		Distance									
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
5,100.0	5,100.0	5,102.0	5,102.0	18.3	7.3	-90.48	-1.9	-230.0	230.0	207.1	22.92	10.035	
5,200.0	5,200.0	5,202.0	5,202.0	18.7	7.4	-90.48	-1.9	-230.0	230.0	206.7	23.33	9.860	
5,300.0	5,300.0	5,302.0	5,302.0	19.0	7.5	-90.48	-1.9	-230.0	230.0	206.3	23.74	9.690	
5,400.0	5,400.0	5,402.0	5,402.0	19.4	7.6	-90.48	-1.9	-230.0	230.0	205.9	24.15	9.526	
5,500.0	5,500.0	5,502.2	5,502.2	19.7	7.8	-90.48	-1.9	-230.0	230.0	205.5	24.56	9.368	
5,600.0	5,600.0	5,610.1	5,610.1	20.1	7.9	14.85	-1.2	-228.1	226.5	201.6	24.95	9.078	
5,700.0	5,699.8	5,717.3	5,717.1	20.4	7.9	15.87	1.0	-222.3	216.2	190.8	25.33	8.535	
5,730.0	5,729.8	5,748.3	5,748.0	20.5	8.0	16.32	1.9	-220.0	211.8	186.3	25.44	8.324	
5,800.0	5,799.5	5,817.3	5,816.8	20.7	8.0	17.39	4.0	-214.7	201.1	175.4	25.71	7.822	
5,900.0	5,899.2	5,916.0	5,915.1	21.1	8.1	19.13	6.9	-207.1	186.0	159.9	26.09	7.126	
6,000.0	5,998.9	6,014.7	6,013.5	21.4	8.1	21.18	9.8	-199.5	171.0	144.5	26.48	6.458	
6,100.0	6,098.6	6,113.4	6,111.8	21.7	8.2	23.61	12.7	-191.8	156.4	129.5	26.88	5.816	
6,200.0	6,198.2	6,212.1	6,210.2	22.1	8.3	26.54	15.7	-184.2	142.0	114.7	27.30	5.202	
6,300.0	6,297.9	6,310.7	6,308.5	22.4	8.4	30.10	18.6	-176.6	128.1	100.4	27.74	4.619	
6,400.0	6,397.6	6,409.4	6,406.8	22.8	8.4	34.51	21.5	-169.0	114.8	86.6	28.22	4.070	
6,500.0	6,497.3	6,508.1	6,505.2	23.1	8.5	40.01	24.4	-161.4	102.4	73.6	28.77	3.560	
6,600.0	6,597.0	6,606.8	6,603.5	23.4	8.6	46.93	27.3	-153.8	91.1	61.7	29.42	3.098	
6,700.0	6,696.6	6,705.5	6,701.9	23.8	8.7	55.60	30.3	-146.2	81.6	51.4	30.23	2.699	
6,800.0	6,796.3	6,804.1	6,800.2	24.1	8.8	66.20	33.2	-138.6	74.4	43.2	31.19	2.384	
6,900.0	6,896.0	6,902.8	6,898.5	24.5	8.8	78.51	36.1	-130.9	70.2	38.0	32.24	2.177	
6,964.4	6,960.2	6,966.4	6,961.9	24.7	8.9	86.94	38.0	-126.0	69.4	36.5	32.89	2.111 CC	
7,000.0	6,995.7	7,001.5	6,996.9	24.8	8.9	91.63	39.0	-123.3	69.7	36.4	33.22	2.097 ES, SF	
7,100.0	7,095.3	7,100.2	7,095.2	25.1	9.0	104.29	42.0	-115.7	72.8	38.8	34.00	2.142	
7,200.0	7,195.0	7,198.8	7,193.6	25.5	9.1	115.44	44.9	-108.1	79.2	44.7	34.55	2.294	
7,300.0	7,294.7	7,297.5	7,291.9	25.8	9.2	124.65	47.8	-100.5	88.2	53.3	34.93	2.525	
7,400.0	7,394.4	7,396.2	7,390.3	26.2	9.3	132.04	50.7	-92.9	99.0	63.8	35.25	2.809	
7,500.0	7,494.1	7,494.9	7,488.6	26.5	9.3	137.92	53.6	-85.3	111.2	75.6	35.53	3.128	
7,600.0	7,593.7	7,593.6	7,586.9	26.9	9.4	142.61	56.6	-77.7	124.2	88.4	35.82	3.468	
7,700.0	7,693.4	7,692.2	7,685.3	27.2	9.5	146.40	59.5	-70.0	138.0	101.8	36.13	3.819	
7,800.0	7,793.1	7,790.9	7,783.6	27.6	9.6	149.49	62.4	-62.4	152.2	115.7	36.45	4.175	
7,900.0	7,892.8	7,889.6	7,882.0	27.9	9.7	152.06	65.3	-54.8	166.8	130.0	36.79	4.533	
8,000.0	7,992.4	7,988.3	7,980.3	28.3	9.8	154.20	68.3	-47.2	181.6	144.5	37.14	4.890	
8,100.0	8,092.1	8,086.9	8,078.6	28.6	9.9	156.03	71.2	-39.6	196.7	159.2	37.51	5.244	
8,200.0	8,191.8	8,185.6	8,177.0	29.0	10.0	157.59	74.1	-32.0	211.9	174.1	37.89	5.594	
8,300.0	8,291.5	8,284.3	8,275.3	29.3	10.1	158.94	77.0	-24.4	227.3	189.0	38.28	5.939	
8,400.0	8,391.2	8,383.0	8,373.7	29.7	10.2	160.12	79.9	-16.8	242.8	204.1	38.68	6.278	
8,500.0	8,490.8	8,481.7	8,472.0	30.0	10.3	161.16	82.9	-9.1	258.4	219.3	39.08	6.611	
8,600.0	8,590.5	8,580.3	8,570.3	30.4	10.4	162.08	85.8	-1.5	274.0	234.5	39.49	6.939	
8,700.0	8,690.2	8,679.0	8,668.7	30.7	10.5	162.90	88.7	6.1	289.7	249.8	39.91	7.260	
8,800.0	8,789.9	8,777.7	8,767.0	31.1	10.6	163.64	91.6	13.7	305.5	265.2	40.33	7.575	
8,900.0	8,889.5	8,876.4	8,865.4	31.4	10.7	164.30	94.6	21.3	321.3	280.5	40.76	7.883	
9,000.0	8,989.2	8,975.0	8,963.7	31.8	10.8	164.91	97.5	28.9	337.1	296.0	41.19	8.186	
9,100.0	9,088.9	9,073.7	9,062.0	32.1	10.9	165.46	100.4	36.5	353.0	311.4	41.62	8.482	
9,200.0	9,188.6	9,172.4	9,160.4	32.5	11.0	165.96	103.3	44.1	368.9	326.9	42.06	8.772	
9,300.0	9,288.3	9,271.1	9,258.7	32.8	11.1	166.42	106.2	51.8	384.8	342.4	42.49	9.056	
9,400.0	9,387.9	9,369.8	9,357.1	33.2	11.2	166.84	109.2	59.4	400.8	357.9	42.94	9.335	
9,500.0	9,487.6	9,468.4	9,455.4	33.5	11.3	167.23	112.1	67.0	416.8	373.4	43.38	9.607	
9,600.0	9,587.3	9,567.1	9,553.7	33.9	11.4	167.59	115.0	74.6	432.8	388.9	43.83	9.875	
9,700.0	9,687.0	9,665.8	9,652.1	34.2	11.5	167.93	117.9	82.2	448.8	404.5	44.27	10.136	
9,800.0	9,786.6	9,764.5	9,750.4	34.6	11.6	168.24	120.9	89.8	464.8	420.1	44.72	10.393	
9,900.0	9,886.3	9,863.1	9,848.8	34.9	11.7	168.53	123.8	97.4	480.8	435.6	45.17	10.644	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #801H - OWB - PWP0													Offset Site Error:	3.0 usft
Survey Program: 0-Standard Keeper 104, 10877-MWD+IFR1+FDIR													Offset Well Error:	3.0 usft
Reference		Offset		Semi Major Axis			Distance						Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
10,000.0	9,986.0	9,961.8	9,947.1	35.3	11.8	168.81	126.7	105.0	496.9	451.2	45.63	10.890		
10,100.0	10,085.7	10,060.5	10,045.4	35.7	11.9	169.06	129.6	112.7	512.9	466.8	46.08	11.131		
10,197.9	10,183.3	10,157.1	10,141.8	36.0	12.1	169.30	132.5	120.1	528.6	482.1	46.53	11.362		
10,200.0	10,185.4	10,159.2	10,143.8	36.0	12.1	171.78	132.5	120.3	529.0	482.4	46.54	11.367		
10,250.0	10,235.1	10,208.3	10,192.8	36.2	12.1	-149.60	134.0	124.1	538.0	491.2	46.78	11.502		
10,300.0	10,284.3	10,256.9	10,241.1	36.4	12.2	-135.61	135.4	127.8	548.8	501.8	47.04	11.668		
10,350.0	10,332.7	10,304.5	10,288.6	36.5	12.2	-129.21	136.8	131.5	561.4	514.1	47.32	11.866		
10,400.0	10,379.8	10,350.7	10,334.6	36.7	12.3	-125.68	138.2	135.0	576.0	528.4	47.61	12.098		
10,450.0	10,425.4	10,395.2	10,379.0	36.8	12.3	-123.48	139.5	138.5	592.5	544.6	47.91	12.367		
10,500.0	10,469.1	10,437.8	10,421.4	37.0	12.4	-121.94	140.8	141.8	611.1	562.9	48.21	12.677		
10,550.0	10,510.4	10,478.0	10,461.5	37.1	12.4	-120.70	142.0	144.9	632.0	583.5	48.50	13.031		
10,600.0	10,549.2	10,515.5	10,498.9	37.3	12.5	-119.53	143.1	147.8	655.3	606.5	48.78	13.432		
10,650.0	10,585.2	10,550.1	10,533.3	37.4	12.5	-118.24	144.1	150.4	680.9	631.8	49.05	13.881		
10,700.0	10,618.0	10,581.4	10,564.6	37.5	12.5	-116.68	145.1	152.8	708.9	659.6	49.29	14.382		
10,750.0	10,647.3	10,609.4	10,592.4	37.6	12.6	-114.72	145.9	155.0	739.2	689.7	49.50	14.933		
10,800.0	10,673.1	10,633.6	10,616.6	37.7	12.6	-112.23	146.6	156.9	771.8	722.1	49.69	15.533		
10,850.0	10,695.1	10,654.1	10,637.0	37.8	12.6	-109.08	147.2	158.4	806.5	756.6	49.84	16.180		
10,900.0	10,713.0	10,670.5	10,653.4	37.9	12.6	-105.16	147.7	159.7	843.0	793.0	49.97	16.870		
10,950.0	10,726.9	10,682.8	10,665.6	38.0	12.6	-100.39	148.1	160.7	881.1	831.0	50.06	17.599		
11,000.0	10,736.5	10,690.9	10,673.7	38.1	12.6	-94.73	148.3	161.3	920.5	870.3	50.13	18.361		
11,050.0	10,741.8	10,694.8	10,677.5	38.2	12.7	-88.27	148.4	161.6	960.8	910.6	50.17	19.150		
11,085.7	10,743.0	10,694.9	10,677.6	38.2	12.7	-83.25	148.4	161.6	990.0	939.8	50.19	19.725		

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #802H - OWB - PWP0												Offset Site Error: 3.0 usft		
Survey Program: 0-MWD+IFR1+FDIR												Offset Well Error: 3.0 usft		
Reference		Offset		Semi Major Axis		Distance								Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore +N/-S (usft)	Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
0.0	0.0	2.0	2.0	3.0	3.0	-90.49	-2.2	-260.0	260.0					
100.0	100.0	102.0	102.0	3.0	3.0	-90.49	-2.2	-260.0	260.0	254.0	6.01	43.287		
200.0	200.0	202.0	202.0	3.0	3.0	-90.49	-2.2	-260.0	260.0	253.9	6.08	42.761		
300.0	300.0	302.0	302.0	3.1	3.1	-90.49	-2.2	-260.0	260.0	253.7	6.24	41.692		
400.0	400.0	402.0	402.0	3.2	3.2	-90.49	-2.2	-260.0	260.0	253.5	6.47	40.196		
500.0	500.0	502.0	502.0	3.4	3.4	-90.49	-2.2	-260.0	260.0	253.2	6.77	38.412		
600.0	600.0	602.0	602.0	3.6	3.6	-90.49	-2.2	-260.0	260.0	252.8	7.13	36.472		
700.0	700.0	702.0	702.0	3.8	3.8	-90.49	-2.2	-260.0	260.0	252.4	7.54	34.482		
800.0	800.0	802.0	802.0	4.0	4.0	-90.49	-2.2	-260.0	260.0	252.0	7.99	32.522		
900.0	900.0	902.0	902.0	4.2	4.2	-90.49	-2.2	-260.0	260.0	251.5	8.48	30.640		
1,000.0	1,000.0	1,002.0	1,002.0	4.5	4.5	-90.49	-2.2	-260.0	260.0	251.0	9.01	28.867		
1,100.0	1,100.0	1,102.0	1,102.0	4.8	4.8	-90.49	-2.2	-260.0	260.0	250.4	9.55	27.215		
1,200.0	1,200.0	1,202.0	1,202.0	5.1	5.1	-90.49	-2.2	-260.0	260.0	249.8	10.12	25.688		
1,300.0	1,300.0	1,302.0	1,302.0	5.4	5.4	-90.49	-2.2	-260.0	260.0	249.3	10.71	24.282		
1,400.0	1,400.0	1,402.0	1,402.0	5.7	5.7	-90.49	-2.2	-260.0	260.0	248.7	11.31	22.992		
1,500.0	1,500.0	1,502.0	1,502.0	6.0	6.0	-90.49	-2.2	-260.0	260.0	248.0	11.92	21.808		
1,600.0	1,600.0	1,602.0	1,602.0	6.3	6.3	-90.49	-2.2	-260.0	260.0	247.4	12.55	20.722		
1,700.0	1,700.0	1,702.0	1,702.0	6.6	6.6	-90.49	-2.2	-260.0	260.0	246.8	13.18	19.725		
1,800.0	1,800.0	1,802.0	1,802.0	6.9	6.9	-90.49	-2.2	-260.0	260.0	246.1	13.82	18.809		
1,900.0	1,900.0	1,902.0	1,902.0	7.2	7.2	-90.49	-2.2	-260.0	260.0	245.5	14.47	17.965		
2,000.0	2,000.0	2,002.0	2,002.0	7.6	7.6	-90.49	-2.2	-260.0	260.0	244.8	15.13	17.187		
2,100.0	2,100.0	2,102.0	2,102.0	7.9	7.9	-90.49	-2.2	-260.0	260.0	244.2	15.79	16.467		
2,200.0	2,200.0	2,202.0	2,202.0	8.2	8.2	-90.49	-2.2	-260.0	260.0	243.5	16.45	15.801		
2,300.0	2,300.0	2,302.0	2,302.0	8.6	8.6	-90.49	-2.2	-260.0	260.0	242.8	17.12	15.183		
2,400.0	2,400.0	2,402.0	2,402.0	8.9	8.9	-90.49	-2.2	-260.0	260.0	242.2	17.80	14.609		
2,416.0	2,416.0	2,418.0	2,418.0	9.0	9.0	-90.49	-2.2	-260.0	260.0	242.1	17.90	14.521		
2,500.0	2,500.0	2,500.0	2,500.0	9.2	9.2	-90.49	-2.2	-260.0	260.0	241.5	18.46	14.080		
2,600.0	2,600.0	2,595.8	2,595.8	9.6	9.6	-90.24	-1.1	-261.1	261.2	242.0	19.12	13.658		
2,700.0	2,700.0	2,692.2	2,692.1	9.9	9.9	-89.55	2.1	-264.3	264.5	244.7	19.78	13.372		
2,800.0	2,800.0	2,792.1	2,791.8	10.3	10.2	-88.77	5.8	-268.0	268.3	247.8	20.46	13.114		
2,900.0	2,900.0	2,891.9	2,891.5	10.6	10.6	-88.01	9.5	-271.7	272.1	251.0	21.14	12.872		
3,000.0	3,000.0	2,991.8	2,991.3	10.9	10.9	-87.27	13.1	-275.4	276.0	254.1	21.82	12.646		
3,100.0	3,100.0	3,091.7	3,091.0	11.3	11.2	-86.55	16.8	-279.1	279.9	257.4	22.51	12.435		
3,200.0	3,200.0	3,191.5	3,190.7	11.6	11.6	-85.85	20.5	-282.9	283.8	260.6	23.19	12.237		
3,300.0	3,300.0	3,291.4	3,290.5	12.0	11.9	-85.17	24.2	-286.6	287.8	263.9	23.88	12.052		
3,400.0	3,400.0	3,391.3	3,390.2	12.3	12.3	-84.51	27.9	-290.3	291.8	267.3	24.57	11.877		
3,500.0	3,500.0	3,491.1	3,489.9	12.7	12.6	-83.87	31.6	-294.0	295.9	270.6	25.26	11.713		
3,600.0	3,600.0	3,491.0	3,489.6	13.0	13.0	-83.25	35.2	-297.7	300.0	274.1	25.96	11.559		
3,700.0	3,700.0	3,490.9	3,489.4	13.4	13.3	-82.64	38.9	-301.4	304.2	277.5	26.65	11.413		
3,800.0	3,800.0	3,790.7	3,789.1	13.7	13.7	-82.05	42.6	-305.1	308.3	281.0	27.35	11.275		
3,900.0	3,900.0	3,890.6	3,888.8	14.1	14.0	-81.47	46.3	-308.8	312.5	284.5	28.04	11.145		
4,000.0	4,000.0	3,990.4	3,988.5	14.4	14.4	-80.91	50.0	-312.5	316.8	288.0	28.74	11.022		
4,100.0	4,100.0	4,090.3	4,088.3	14.8	14.7	-80.37	53.7	-316.2	321.0	291.6	29.44	10.905		
4,200.0	4,200.0	4,190.2	4,188.0	15.1	15.0	-79.84	57.3	-319.9	325.3	295.2	30.14	10.794		
4,300.0	4,300.0	4,290.0	4,287.7	15.5	15.4	-79.32	61.0	-323.6	329.7	298.8	30.84	10.689		
4,400.0	4,400.0	4,389.9	4,387.4	15.8	15.8	-78.82	64.7	-327.3	334.0	302.5	31.54	10.590		
4,500.0	4,500.0	4,489.8	4,487.2	16.2	16.1	-78.33	68.4	-331.1	338.4	306.1	32.24	10.495		
4,600.0	4,600.0	4,489.6	4,486.9	16.5	16.5	-77.85	72.1	-334.8	342.8	309.8	32.94	10.404		
4,700.0	4,700.0	4,489.5	4,486.6	16.9	16.8	-77.38	75.8	-338.5	347.2	313.5	33.65	10.318		
4,800.0	4,800.0	4,789.3	4,786.3	17.2	17.2	-76.93	79.4	-342.2	351.6	317.3	34.35	10.236		
4,900.0	4,900.0	4,889.2	4,886.1	17.6	17.5	-76.49	83.1	-345.9	356.1	321.0	35.06	10.158		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #802H - OWB - PWP0													Offset Site Error:	3.0 usft
Survey Program: 0-MWD+IFR1+FDIR													Offset Well Error:	3.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Semi Major Axis	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
5,000.0	5,000.0	4,989.1	4,985.8	17.9	17.9	-76.05		86.8	-349.6	360.6	324.8	35.76	10.083	
5,100.0	5,100.0	5,088.9	5,085.5	18.3	18.2	-75.63		90.5	-353.3	365.1	328.6	36.47	10.012	
5,200.0	5,200.0	5,188.8	5,185.2	18.7	18.6	-75.22		94.2	-357.0	369.6	332.4	37.17	9.943	
5,300.0	5,300.0	5,288.7	5,285.0	19.0	18.9	-74.82		97.9	-360.7	374.1	336.3	37.88	9.878	
5,400.0	5,400.0	5,388.5	5,384.7	19.4	19.3	-74.43		101.5	-364.4	378.7	340.1	38.58	9.815	
5,500.0	5,500.0	5,488.4	5,484.4	19.7	19.6	-74.05		105.2	-368.1	383.3	344.0	39.29	9.755	
5,600.0	5,600.0	5,588.3	5,584.2	20.1	20.0	31.43		108.9	-371.8	386.4	346.4	39.99	9.663	
5,700.0	5,699.8	5,688.1	5,683.9	20.4	20.3	32.20		112.6	-375.6	386.6	345.9	40.67	9.504	
5,730.0	5,729.8	5,718.1	5,713.8	20.5	20.4	32.49		113.7	-376.7	386.1	345.2	40.88	9.444	
5,800.0	5,799.5	5,787.9	5,783.5	20.7	20.7	33.19		116.3	-379.3	384.6	343.2	41.36	9.299	
5,900.0	5,899.2	5,887.6	5,883.1	21.1	21.0	34.19		120.0	-383.0	382.6	340.6	42.05	9.100	
6,000.0	5,998.9	5,987.4	5,982.8	21.4	21.4	35.21		123.6	-386.7	380.8	338.0	42.73	8.910	
6,100.0	6,098.6	6,087.1	6,082.4	21.7	21.8	36.23		127.3	-390.4	379.0	335.6	43.42	8.729	
6,200.0	6,198.2	6,186.9	6,182.0	22.1	22.1	37.27		131.0	-394.1	377.4	333.3	44.12	8.555	
6,300.0	6,297.9	6,286.7	6,281.6	22.4	22.5	38.31		134.7	-397.8	375.9	331.1	44.81	8.390	
6,400.0	6,397.6	6,386.4	6,381.2	22.8	22.8	39.36		138.4	-401.5	374.6	329.1	45.50	8.232	
6,500.0	6,497.3	6,486.2	6,480.8	23.1	23.2	40.42		142.0	-405.2	373.3	327.1	46.20	8.082	
6,600.0	6,597.0	6,588.6	6,583.1	23.4	23.5	41.51		145.7	-408.9	372.2	325.3	46.91	7.934	
6,700.0	6,696.6	6,702.4	6,696.9	23.8	23.9	42.59		147.7	-410.9	368.6	320.9	47.66	7.733	
6,800.0	6,796.3	6,803.8	6,798.3	24.1	24.3	43.46		147.8	-411.0	362.7	314.4	48.36	7.501	
6,900.0	6,896.0	6,903.5	6,898.0	24.5	24.7	44.35		147.8	-411.0	356.9	307.9	49.05	7.277	
7,000.0	6,995.7	7,003.2	6,997.7	24.8	25.0	45.26		147.8	-411.0	351.2	301.5	49.75	7.060	
7,100.0	7,095.3	7,102.8	7,097.3	25.1	25.4	46.20		147.8	-411.0	345.6	295.2	50.44	6.852	
7,200.0	7,195.0	7,202.5	7,197.0	25.5	25.7	47.18		147.8	-411.0	340.1	289.0	51.14	6.651	
7,300.0	7,294.7	7,302.2	7,296.7	25.8	26.1	48.18		147.8	-411.0	334.7	282.9	51.84	6.457	
7,400.0	7,394.4	7,401.9	7,396.4	26.2	26.4	49.22		147.8	-411.0	329.4	276.9	52.54	6.270	
7,500.0	7,494.1	7,501.6	7,496.1	26.5	26.8	50.29		147.8	-411.0	324.2	271.0	53.24	6.090	
7,600.0	7,593.7	7,601.2	7,595.7	26.9	27.1	51.40		147.8	-411.0	319.1	265.2	53.94	5.917	
7,700.0	7,693.4	7,700.9	7,695.4	27.2	27.5	52.54		147.8	-411.0	314.2	259.6	54.64	5.750	
7,800.0	7,793.1	7,800.6	7,795.1	27.6	27.8	53.72		147.8	-411.0	309.4	254.0	55.34	5.590	
7,900.0	7,892.8	7,900.3	7,894.8	27.9	28.2	54.93		147.8	-411.0	304.7	248.6	56.04	5.436	
8,000.0	7,992.4	7,999.9	7,994.4	28.3	28.5	56.18		147.8	-411.0	300.1	243.4	56.75	5.289	
8,100.0	8,092.1	8,099.6	8,094.1	28.6	28.9	57.47		147.8	-411.0	295.7	238.3	57.45	5.148	
8,200.0	8,191.8	8,199.3	8,193.8	29.0	29.2	58.79		147.8	-411.0	291.5	233.3	58.16	5.012	
8,300.0	8,291.5	8,299.0	8,293.5	29.3	29.6	60.16		147.8	-411.0	287.4	228.5	58.86	4.883	
8,400.0	8,391.2	8,398.7	8,393.2	29.7	30.0	61.56		147.8	-411.0	283.5	223.9	59.57	4.759	
8,500.0	8,490.8	8,498.3	8,492.8	30.0	30.3	63.00		147.8	-411.0	279.8	219.5	60.28	4.641	
8,600.0	8,590.5	8,598.0	8,592.5	30.4	30.7	64.48		147.8	-411.0	276.2	215.2	60.98	4.529	
8,700.0	8,690.2	8,697.7	8,692.2	30.7	31.0	65.99		147.8	-411.0	272.8	211.1	61.69	4.423	
8,800.0	8,789.9	8,797.4	8,791.9	31.1	31.4	67.55		147.8	-411.0	269.7	207.3	62.40	4.322	
8,900.0	8,889.5	8,897.0	8,891.5	31.4	31.7	69.14		147.8	-411.0	266.7	203.6	63.11	4.226	
9,000.0	8,989.2	8,996.7	8,991.2	31.8	32.1	70.76		147.8	-411.0	263.9	200.1	63.82	4.136	
9,100.0	9,088.9	9,096.4	9,090.9	32.1	32.4	72.41		147.8	-411.0	261.4	196.9	64.52	4.051	
9,200.0	9,188.6	9,196.1	9,190.6	32.5	32.8	74.10		147.8	-411.0	259.1	193.8	65.23	3.971	
9,300.0	9,288.3	9,295.8	9,290.3	32.8	33.1	75.81		147.8	-411.0	257.0	191.0	65.94	3.897	
9,400.0	9,387.9	9,395.4	9,389.9	33.2	33.5	77.55		147.8	-411.0	255.1	188.5	66.65	3.828	
9,500.0	9,487.6	9,495.1	9,489.6	33.5	33.8	79.32		147.8	-411.0	253.5	186.2	67.36	3.763	
9,600.0	9,587.3	9,594.8	9,589.3	33.9	34.2	81.10		147.8	-411.0	252.2	184.1	68.07	3.704	
9,700.0	9,687.0	9,694.5	9,689.0	34.2	34.6	82.91		147.8	-411.0	251.0	182.2	68.78	3.650	
9,800.0	9,786.6	9,794.1	9,788.6	34.6	34.9	84.72		147.8	-411.0	250.2	180.7	69.49	3.600	
9,900.0	9,886.3	9,893.8	9,888.3	34.9	35.3	86.55		147.8	-411.0	249.6	179.3	70.20	3.555	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #802H - OWB - PWP0												Offset Site Error: 3.0 usft	
Survey Program: 0-MWD+IFR1+FDIR												Offset Well Error: 3.0 usft	
Reference		Offset		Semi Major Axis		Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
10,000.0	9,986.0	9,993.5	9,988.0	35.3	35.6	88.39	147.8	-411.0	249.2	178.3	70.91	3.514	CC
10,087.7	10,073.4	10,080.9	10,075.4	35.6	35.9	90.00	147.8	-411.0	249.1	177.6	71.54	3.482	
10,100.0	10,085.7	10,093.2	10,087.7	35.7	36.0	90.23	147.8	-411.0	249.1	177.5	71.62	3.478	
10,197.9	10,183.3	10,190.8	10,185.3	36.0	36.3	92.03	147.8	-411.0	249.3	176.9	72.32	3.447	
10,200.0	10,185.4	10,192.9	10,187.4	36.0	36.3	94.51	147.8	-411.0	249.3	176.9	72.33	3.446	
10,250.0	10,235.1	10,242.6	10,237.1	36.2	36.5	133.38	147.8	-411.0	251.8	179.1	72.69	3.464	ES, SF
10,300.0	10,284.3	10,291.8	10,286.3	36.4	36.7	147.95	147.8	-411.0	258.6	185.6	73.03	3.541	
10,350.0	10,332.7	10,340.2	10,334.7	36.5	36.9	155.13	147.8	-411.0	269.8	196.4	73.37	3.677	
10,400.0	10,379.8	10,387.4	10,381.8	36.7	37.0	159.56	147.8	-411.0	285.2	211.5	73.70	3.870	
10,450.0	10,425.4	10,432.9	10,427.4	36.8	37.2	162.66	147.8	-411.0	304.8	230.8	74.01	4.118	
10,500.0	10,469.1	10,476.6	10,471.1	37.0	37.3	164.98	147.8	-411.0	328.4	254.1	74.31	4.420	
10,550.0	10,510.4	10,517.9	10,512.4	37.1	37.5	166.79	147.8	-411.0	355.9	281.3	74.59	4.771	
10,600.0	10,549.2	10,556.7	10,551.2	37.3	37.6	168.22	147.8	-411.0	387.0	312.1	74.85	5.170	
10,650.0	10,585.2	10,592.7	10,587.2	37.4	37.8	169.35	147.8	-411.0	421.4	346.3	75.08	5.612	
10,700.0	10,618.0	10,625.5	10,620.0	37.5	37.9	170.24	147.8	-411.0	458.8	383.5	75.29	6.094	
10,750.0	10,647.3	10,654.8	10,649.3	37.6	38.0	170.91	147.8	-411.0	499.1	423.6	75.48	6.612	
10,800.0	10,673.1	10,680.6	10,675.1	37.7	38.1	171.38	147.8	-411.0	541.8	466.1	75.64	7.163	
10,850.0	10,695.1	10,702.6	10,697.1	37.8	38.1	171.64	147.8	-411.0	586.6	510.8	75.77	7.742	
10,900.0	10,713.0	10,720.5	10,715.0	37.9	38.2	171.62	147.8	-411.0	633.2	557.3	75.87	8.345	
10,950.0	10,726.9	10,734.4	10,728.9	38.0	38.3	171.17	147.8	-411.0	681.2	605.2	75.95	8.968	
11,000.0	10,736.5	11,924.6	11,435.0	38.1	40.7	179.06	-582.3	-406.2	696.6	651.1	45.45	15.326	
11,050.0	10,741.8	11,974.3	11,435.0	38.2	40.8	179.10	-632.0	-405.9	691.2	645.6	45.60	15.158	
11,085.7	10,743.0	12,010.0	11,435.0	38.2	40.8	179.10	-667.7	-405.7	690.1	644.4	45.71	15.096	
11,100.0	10,743.0	12,024.3	11,435.0	38.2	40.9	179.10	-682.0	-405.6	690.1	644.3	45.76	15.081	
11,200.0	10,743.1	12,124.3	11,435.0	38.4	41.0	179.11	-782.0	-404.9	690.0	643.9	46.11	14.965	
11,300.0	10,743.2	12,224.3	11,435.0	38.5	41.1	179.11	-882.0	-404.3	689.9	643.4	46.50	14.834	
11,400.0	10,743.3	12,324.3	11,435.0	38.7	41.3	179.11	-982.0	-403.6	689.8	642.8	46.95	14.690	
11,500.0	10,743.4	12,424.3	11,435.0	38.9	41.5	179.11	-1,082.0	-403.0	689.6	642.2	47.45	14.535	
11,600.0	10,743.5	12,524.3	11,435.0	39.1	41.6	179.11	-1,182.0	-402.3	689.5	641.6	47.99	14.368	
11,700.0	10,743.6	12,624.3	11,435.0	39.3	41.9	179.11	-1,282.0	-401.7	689.4	640.9	48.58	14.193	
11,800.0	10,743.7	12,724.3	11,435.0	39.6	42.1	179.11	-1,382.0	-401.0	689.3	640.1	49.21	14.009	
11,900.0	10,743.8	12,824.3	11,435.0	39.8	42.3	179.11	-1,482.0	-400.4	689.2	639.4	49.88	13.818	
12,000.0	10,743.9	12,924.3	11,435.0	40.1	42.6	179.11	-1,582.0	-399.7	689.1	638.5	50.59	13.622	
12,100.0	10,744.0	13,024.3	11,435.0	40.4	42.9	179.11	-1,682.0	-399.1	689.0	637.7	51.34	13.420	
12,200.0	10,744.1	13,124.3	11,435.0	40.7	43.1	179.11	-1,781.9	-398.4	688.9	636.8	52.13	13.216	
12,300.0	10,744.2	13,224.3	11,435.0	41.0	43.5	179.11	-1,881.9	-397.8	688.8	635.9	52.95	13.009	
12,400.0	10,744.3	13,324.3	11,435.0	41.4	43.8	179.11	-1,981.9	-397.1	688.7	634.9	53.80	12.800	
12,500.0	10,744.4	13,424.3	11,435.0	41.7	44.1	179.11	-2,081.9	-396.5	688.6	633.9	54.69	12.591	
12,600.0	10,744.6	13,524.3	11,435.0	42.1	44.5	179.11	-2,181.9	-395.8	688.5	632.9	55.61	12.381	
12,700.0	10,744.7	13,624.3	11,435.0	42.5	44.8	179.11	-2,281.9	-395.2	688.4	631.8	56.55	12.172	
12,800.0	10,744.8	13,724.3	11,435.0	42.9	45.2	179.11	-2,381.9	-394.5	688.3	630.8	57.53	11.965	
12,900.0	10,744.9	13,824.3	11,435.0	43.3	45.6	179.11	-2,481.9	-393.9	688.2	629.7	58.53	11.759	
13,000.0	10,745.0	13,924.3	11,435.0	43.7	46.0	179.12	-2,581.9	-393.2	688.1	628.5	59.55	11.555	
13,100.0	10,745.1	14,024.3	11,435.0	44.2	46.4	179.12	-2,681.9	-392.6	688.0	627.4	60.60	11.353	
13,200.0	10,745.2	14,124.3	11,435.0	44.6	46.8	179.12	-2,781.9	-391.9	687.9	626.2	61.67	11.155	
13,300.0	10,745.3	14,224.3	11,435.0	45.1	47.3	179.12	-2,881.9	-391.3	687.8	625.0	62.76	10.959	
13,400.0	10,745.4	14,324.3	11,435.0	45.5	47.7	179.12	-2,981.9	-390.6	687.7	623.8	63.87	10.767	
13,500.0	10,745.5	14,424.3	11,435.0	46.0	48.2	179.12	-3,081.9	-390.0	687.6	622.6	65.00	10.578	
13,600.0	10,745.6	14,524.3	11,435.0	46.5	48.7	179.12	-3,181.9	-389.3	687.4	621.3	66.15	10.393	
13,700.0	10,745.7	14,624.3	11,435.0	47.0	49.1	179.12	-3,281.9	-388.7	687.3	620.0	67.31	10.212	
13,800.0	10,745.8	14,724.3	11,435.0	47.5	49.6	179.12	-3,381.9	-388.0	687.2	618.7	68.49	10.034	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #802H - OWB - PWP0													Offset Site Error:	3.0 usft
Survey Program: 0-MWD+IFR1+FDIR													Offset Well Error:	3.0 usft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
13,900.0	10,745.9	14,824.3	11,435.0	48.1	50.1	179.12	-3,481.9	-387.4	687.1	617.4	69.69	9.860		
14,000.0	10,746.0	14,924.3	11,435.0	48.6	50.6	179.12	-3,581.9	-386.7	687.0	616.1	70.90	9.690		
14,100.0	10,746.1	15,024.3	11,435.0	49.1	51.2	179.12	-3,681.9	-386.1	686.9	614.8	72.12	9.525		
14,200.0	10,746.2	15,124.3	11,435.0	49.7	51.7	179.12	-3,781.9	-385.4	686.8	613.5	73.36	9.362		
14,300.0	10,746.3	15,224.3	11,435.0	50.3	52.2	179.12	-3,881.9	-384.8	686.7	612.1	74.61	9.204		
14,400.0	10,746.4	15,324.3	11,435.0	50.8	52.8	179.12	-3,981.9	-384.1	686.6	610.7	75.87	9.050		
14,500.0	10,746.5	15,424.3	11,435.0	51.4	53.3	179.12	-4,081.9	-383.5	686.5	609.4	77.15	8.899		
14,600.0	10,746.7	15,524.3	11,435.0	52.0	53.9	179.12	-4,181.9	-382.8	686.4	608.0	78.43	8.752		
14,700.0	10,746.8	15,624.3	11,435.0	52.6	54.5	179.12	-4,281.9	-382.2	686.3	606.6	79.72	8.608		
14,800.0	10,746.9	15,724.3	11,435.0	53.2	55.1	179.13	-4,381.9	-381.5	686.2	605.2	81.03	8.469		
14,900.0	10,747.0	15,824.3	11,435.0	53.8	55.7	179.13	-4,481.9	-380.9	686.1	603.7	82.34	8.332		
15,000.0	10,747.1	15,924.3	11,435.0	54.4	56.2	179.13	-4,581.9	-380.2	686.0	602.3	83.66	8.199		
15,100.0	10,747.2	16,024.3	11,435.0	55.0	56.8	179.13	-4,681.9	-379.6	685.9	600.9	84.99	8.070		
15,200.0	10,747.3	16,124.3	11,435.0	55.6	57.5	179.13	-4,781.9	-378.9	685.8	599.4	86.33	7.943		
15,300.0	10,747.4	16,224.3	11,435.0	56.3	58.1	179.13	-4,881.9	-378.3	685.7	598.0	87.68	7.820		
15,400.0	10,747.5	16,324.3	11,435.0	56.9	58.7	179.13	-4,981.9	-377.6	685.6	596.5	89.03	7.700		
15,500.0	10,747.6	16,424.3	11,435.0	57.6	59.3	179.13	-5,081.9	-377.0	685.5	595.1	90.39	7.583		
15,600.0	10,747.7	16,524.3	11,435.0	58.2	60.0	179.13	-5,181.9	-376.3	685.4	593.6	91.76	7.469		
15,700.0	10,747.8	16,624.3	11,435.0	58.9	60.6	179.13	-5,281.9	-375.7	685.2	592.1	93.13	7.358		
15,800.0	10,747.9	16,724.3	11,435.0	59.5	61.2	179.13	-5,381.9	-375.0	685.1	590.6	94.51	7.249		
15,900.0	10,748.0	16,824.3	11,435.0	60.2	61.9	179.13	-5,481.9	-374.4	685.0	589.1	95.90	7.143		
16,000.0	10,748.1	16,924.3	11,435.0	60.9	62.5	179.13	-5,581.9	-373.7	684.9	587.6	97.29	7.040		
16,100.0	10,748.2	17,024.3	11,435.0	61.6	63.2	179.13	-5,681.9	-373.1	684.8	586.1	98.69	6.939		
16,200.0	10,748.3	17,124.3	11,435.0	62.2	63.9	179.13	-5,781.9	-372.4	684.7	584.6	100.09	6.841		
16,300.0	10,748.4	17,224.3	11,435.0	62.9	64.5	179.13	-5,881.9	-371.8	684.6	583.1	101.50	6.745		
16,400.0	10,748.5	17,324.3	11,435.0	63.6	65.2	179.13	-5,981.9	-371.1	684.5	581.6	102.91	6.652		
16,500.0	10,748.6	17,424.3	11,435.0	64.3	65.9	179.13	-6,081.9	-370.5	684.4	580.1	104.32	6.561		
16,600.0	10,748.8	17,524.3	11,435.0	65.0	66.6	179.13	-6,181.9	-369.8	684.3	578.6	105.74	6.471		
16,700.0	10,748.9	17,624.3	11,435.0	65.7	67.3	179.14	-6,281.9	-369.2	684.2	577.0	107.17	6.384		
16,800.0	10,749.0	17,724.3	11,435.0	66.4	67.9	179.14	-6,381.9	-368.5	684.1	575.5	108.60	6.299		
16,900.0	10,749.1	17,824.3	11,435.0	67.1	68.6	179.14	-6,481.8	-367.9	684.0	574.0	110.03	6.217		
17,000.0	10,749.2	17,924.3	11,435.0	67.8	69.3	179.14	-6,581.8	-367.2	683.9	572.4	111.46	6.136		
17,100.0	10,749.3	18,024.3	11,435.0	68.5	70.0	179.14	-6,681.8	-366.6	683.8	570.9	112.90	6.056		
17,200.0	10,749.4	18,124.3	11,435.0	69.3	70.7	179.14	-6,781.8	-365.9	683.7	569.3	114.35	5.979		
17,300.0	10,749.5	18,224.3	11,435.0	70.0	71.5	179.14	-6,881.8	-365.3	683.6	567.8	115.79	5.903		
17,400.0	10,749.6	18,324.3	11,435.0	70.7	72.2	179.14	-6,981.8	-364.6	683.5	566.2	117.24	5.830		
17,500.0	10,749.7	18,424.3	11,435.0	71.4	72.9	179.14	-7,081.8	-364.0	683.4	564.7	118.69	5.757		
17,600.0	10,749.8	18,524.3	11,435.0	72.2	73.6	179.14	-7,181.8	-363.3	683.3	563.1	120.15	5.687		
17,700.0	10,749.9	18,624.3	11,435.0	72.9	74.3	179.14	-7,281.8	-362.7	683.2	561.5	121.61	5.618		
17,800.0	10,750.0	18,724.3	11,435.0	73.6	75.0	179.14	-7,381.8	-362.0	683.0	560.0	123.07	5.550		
17,900.0	10,750.1	18,824.3	11,435.0	74.4	75.8	179.14	-7,481.8	-361.4	682.9	558.4	124.53	5.484		
18,000.0	10,750.2	18,924.3	11,435.0	75.1	76.5	179.14	-7,581.8	-360.7	682.8	556.8	126.00	5.419		
18,100.0	10,750.3	19,024.3	11,435.0	75.9	77.2	179.14	-7,681.8	-360.1	682.7	555.3	127.47	5.356		
18,200.0	10,750.4	19,124.3	11,435.0	76.6	78.0	179.14	-7,781.8	-359.4	682.6	553.7	128.94	5.294		
18,300.0	10,750.5	19,224.3	11,435.0	77.4	78.7	179.14	-7,881.8	-358.8	682.5	552.1	130.41	5.234		
18,400.0	10,750.6	19,324.3	11,435.0	78.1	79.5	179.14	-7,981.8	-358.1	682.4	550.5	131.89	5.174		
18,500.0	10,750.8	19,424.3	11,435.0	78.9	80.2	179.15	-8,081.8	-357.5	682.3	549.0	133.36	5.116		
18,600.0	10,750.9	19,524.3	11,435.0	79.6	80.9	179.15	-8,181.8	-356.8	682.2	547.4	134.84	5.059		
18,700.0	10,751.0	19,624.3	11,435.0	80.4	81.7	179.15	-8,281.8	-356.2	682.1	545.8	136.33	5.004		
18,800.0	10,751.1	19,724.3	11,435.0	81.2	82.4	179.15	-8,381.8	-355.5	682.0	544.2	137.81	4.949		
18,900.0	10,751.2	19,824.3	11,435.0	81.9	83.2	179.15	-8,481.8	-354.9	681.9	542.6	139.29	4.895		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #802H - OWB - PWP0													Offset Site Error:	3.0 usft
Survey Program: 0-MWD+IFR1+FDIR													Offset Well Error:	3.0 usft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
19,000.0	10,751.3	19,924.3	11,435.0	82.7	83.9	179.15	-8,581.8	-354.2	681.8	541.0	140.78	4.843		
19,100.0	10,751.4	20,024.3	11,435.0	83.4	84.7	179.15	-8,681.8	-353.6	681.7	539.4	142.27	4.791		
19,200.0	10,751.5	20,124.3	11,435.0	84.2	85.5	179.15	-8,781.8	-352.9	681.6	537.8	143.76	4.741		
19,300.0	10,751.6	20,224.3	11,435.0	85.0	86.2	179.15	-8,881.8	-352.3	681.5	536.2	145.25	4.692		
19,400.0	10,751.7	20,324.3	11,435.0	85.8	87.0	179.15	-8,981.8	-351.6	681.4	534.6	146.75	4.643		
19,500.0	10,751.8	20,424.3	11,435.0	86.5	87.8	179.15	-9,081.8	-351.0	681.3	533.0	148.24	4.596		
19,600.0	10,751.9	20,524.3	11,435.0	87.3	88.5	179.15	-9,181.8	-350.3	681.2	531.4	149.74	4.549		
19,700.0	10,752.0	20,624.3	11,435.0	88.1	89.3	179.15	-9,281.8	-349.7	681.1	529.8	151.24	4.503		
19,800.0	10,752.1	20,724.3	11,435.0	88.9	90.1	179.15	-9,381.8	-349.0	681.0	528.2	152.74	4.458		
19,900.0	10,752.2	20,824.3	11,435.0	89.6	90.8	179.15	-9,481.8	-348.4	680.8	526.6	154.24	4.414		
20,000.0	10,752.3	20,924.3	11,435.0	90.4	91.6	179.15	-9,581.8	-347.7	680.7	525.0	155.74	4.371		
20,100.0	10,752.4	21,024.3	11,435.0	91.2	92.4	179.15	-9,681.8	-347.1	680.6	523.4	157.25	4.328		
20,200.0	10,752.5	21,124.3	11,435.0	92.0	93.1	179.16	-9,781.8	-346.4	680.5	521.8	158.75	4.287		
20,300.0	10,752.6	21,224.3	11,435.0	92.8	93.9	179.16	-9,881.8	-345.8	680.4	520.2	160.26	4.246		
20,400.0	10,752.7	21,324.3	11,435.0	93.6	94.7	179.16	-9,981.8	-345.1	680.3	518.6	161.77	4.206		
20,500.0	10,752.9	21,424.3	11,435.0	94.3	95.5	179.16	-10,081.8	-344.5	680.2	516.9	163.28	4.166		
20,600.0	10,753.0	21,524.3	11,435.0	95.1	96.3	179.16	-10,181.8	-343.8	680.1	515.3	164.79	4.127		
20,639.4	10,753.0	21,563.7	11,435.0	95.4	96.6	179.16	-10,221.2	-343.5	680.1	514.8	165.23	4.116		
20,639.8	10,753.0	21,563.7	11,435.0	95.4	96.6	179.16	-10,221.2	-343.5	680.1	514.8	165.23	4.116		

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #803H - OWB - PWP0												Offset Site Error: 3.0 usft		
Survey Program: 0-MWD+IFR1+FDIR												Offset Well Error: 3.0 usft		
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
0.0	0.0	2.0	2.0	3.0	3.0	-90.48	-2.4	-290.0	290.0					
100.0	100.0	102.0	102.0	3.0	3.0	-90.48	-2.4	-290.0	290.0	284.0	6.01	48.283		
200.0	200.0	202.0	202.0	3.0	3.0	-90.48	-2.4	-290.0	290.0	283.9	6.08	47.697		
300.0	300.0	302.0	302.0	3.1	3.1	-90.48	-2.4	-290.0	290.0	283.7	6.24	46.505		
400.0	400.0	402.0	402.0	3.2	3.2	-90.48	-2.4	-290.0	290.0	283.5	6.47	44.836		
500.0	500.0	502.0	502.0	3.4	3.4	-90.48	-2.4	-290.0	290.0	283.2	6.77	42.846		
600.0	600.0	602.0	602.0	3.6	3.6	-90.48	-2.4	-290.0	290.0	282.9	7.13	40.682		
700.0	700.0	702.0	702.0	3.8	3.8	-90.48	-2.4	-290.0	290.0	282.4	7.54	38.463		
800.0	800.0	802.0	802.0	4.0	4.0	-90.48	-2.4	-290.0	290.0	282.0	7.99	36.276		
900.0	900.0	902.0	902.0	4.2	4.2	-90.48	-2.4	-290.0	290.0	281.5	8.48	34.177		
1,000.0	1,000.0	1,002.0	1,002.0	4.5	4.5	-90.48	-2.4	-290.0	290.0	281.0	9.01	32.199		
1,100.0	1,100.0	1,102.0	1,102.0	4.8	4.8	-90.48	-2.4	-290.0	290.0	280.4	9.55	30.357		
1,200.0	1,200.0	1,202.0	1,202.0	5.1	5.1	-90.48	-2.4	-290.0	290.0	279.9	10.12	28.653		
1,300.0	1,300.0	1,302.0	1,302.0	5.4	5.4	-90.48	-2.4	-290.0	290.0	279.3	10.71	27.086		
1,400.0	1,400.0	1,402.0	1,402.0	5.7	5.7	-90.48	-2.4	-290.0	290.0	278.7	11.31	25.646		
1,500.0	1,500.0	1,502.0	1,502.0	6.0	6.0	-90.48	-2.4	-290.0	290.0	278.1	11.92	24.326		
1,600.0	1,600.0	1,602.0	1,602.0	6.3	6.3	-90.48	-2.4	-290.0	290.0	277.4	12.55	23.114		
1,700.0	1,700.0	1,702.0	1,702.0	6.6	6.6	-90.48	-2.4	-290.0	290.0	276.8	13.18	22.002		
1,800.0	1,800.0	1,802.0	1,802.0	6.9	6.9	-90.48	-2.4	-290.0	290.0	276.2	13.82	20.980		
1,900.0	1,900.0	1,902.0	1,902.0	7.2	7.2	-90.48	-2.4	-290.0	290.0	275.5	14.47	20.039		
2,000.0	2,000.0	2,002.0	2,002.0	7.6	7.6	-90.48	-2.4	-290.0	290.0	274.9	15.13	19.171		
2,100.0	2,100.0	2,102.0	2,102.0	7.9	7.9	-90.48	-2.4	-290.0	290.0	274.2	15.79	18.368		
2,200.0	2,200.0	2,202.0	2,202.0	8.2	8.2	-90.48	-2.4	-290.0	290.0	273.5	16.45	17.625		
2,300.0	2,300.0	2,302.0	2,302.0	8.6	8.6	-90.48	-2.4	-290.0	290.0	272.9	17.12	16.936		
2,400.0	2,400.0	2,402.0	2,402.0	8.9	8.9	-90.48	-2.4	-290.0	290.0	272.2	17.80	16.295		
2,416.0	2,416.0	2,418.0	2,418.0	9.0	9.0	-90.48	-2.4	-290.0	290.0	272.1	17.90	16.197	CC	
2,500.0	2,500.0	2,500.0	2,500.0	9.2	9.2	-90.48	-2.4	-290.0	290.0	271.5	18.46	15.705	ES	
2,600.0	2,600.0	2,592.7	2,592.7	9.6	9.5	-90.42	-2.2	-291.4	291.6	272.5	19.10	15.263		
2,700.0	2,700.0	2,683.5	2,683.3	9.9	9.8	-90.27	-1.4	-295.8	296.3	276.6	19.72	15.029		
2,800.0	2,800.0	2,776.3	2,775.9	10.3	10.1	-90.02	-0.1	-303.0	304.1	283.8	20.34	14.953		
2,900.0	2,900.0	2,875.9	2,875.1	10.6	10.5	-89.75	1.4	-311.5	312.7	291.7	21.01	14.885		
3,000.0	3,000.0	2,975.6	2,974.4	10.9	10.8	-89.48	2.9	-320.1	321.3	299.6	21.68	14.818		
3,100.0	3,100.0	3,075.2	3,073.6	11.3	11.1	-89.23	4.4	-328.6	329.9	307.5	22.36	14.754		
3,200.0	3,200.0	3,174.8	3,172.9	11.6	11.5	-89.00	5.9	-337.2	338.5	315.4	23.04	14.692		
3,300.0	3,300.0	3,274.4	3,272.1	12.0	11.8	-88.77	7.4	-345.7	347.1	323.4	23.72	14.633		
3,400.0	3,400.0	3,374.0	3,371.3	12.3	12.2	-88.56	8.9	-354.3	355.7	331.3	24.40	14.576		
3,500.0	3,500.0	3,473.7	3,470.6	12.7	12.5	-88.35	10.4	-362.8	364.3	339.2	25.09	14.521		
3,600.0	3,600.0	3,573.3	3,569.8	13.0	12.8	-88.16	11.9	-371.4	373.0	347.2	25.78	14.468		
3,700.0	3,700.0	3,672.9	3,669.1	13.4	13.2	-87.97	13.4	-379.9	381.6	355.1	26.47	14.417		
3,800.0	3,800.0	3,772.5	3,768.3	13.7	13.5	-87.80	14.9	-388.5	390.2	363.1	27.16	14.368		
3,900.0	3,900.0	3,872.1	3,867.5	14.1	13.9	-87.63	16.5	-397.0	398.9	371.0	27.85	14.320		
4,000.0	4,000.0	3,971.7	3,966.8	14.4	14.2	-87.46	18.0	-405.6	407.5	378.9	28.55	14.275		
4,100.0	4,100.0	4,071.4	4,066.0	14.8	14.6	-87.31	19.5	-414.1	416.1	386.9	29.24	14.231		
4,200.0	4,200.0	4,171.0	4,165.3	15.1	14.9	-87.16	21.0	-422.7	424.8	394.8	29.94	14.189		
4,300.0	4,300.0	4,270.6	4,264.5	15.5	15.3	-87.01	22.5	-431.2	433.4	402.8	30.64	14.148		
4,400.0	4,400.0	4,370.2	4,363.7	15.8	15.6	-86.88	24.0	-439.8	442.1	410.8	31.33	14.109		
4,500.0	4,500.0	4,469.8	4,463.0	16.2	16.0	-86.74	25.5	-448.3	450.7	418.7	32.03	14.071		
4,600.0	4,600.0	4,569.5	4,562.2	16.5	16.3	-86.62	27.0	-456.9	459.4	426.7	32.73	14.034		
4,700.0	4,700.0	4,669.1	4,661.5	16.9	16.7	-86.49	28.5	-465.4	468.1	434.6	33.43	13.999		
4,800.0	4,800.0	4,768.7	4,760.7	17.2	17.0	-86.38	30.0	-474.0	476.7	442.6	34.14	13.965		
4,900.0	4,900.0	4,868.3	4,859.9	17.6	17.4	-86.26	31.5	-482.5	485.4	450.5	34.84	13.932		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #803H - OWB - PWP0													Offset Site Error:	3.0 usft
Survey Program: 0-MWD+IFR1+FDIR													Offset Well Error:	3.0 usft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
5,000.0	5,000.0	4,967.9	4,959.2	17.9	17.7	-86.15	33.0	-491.1	494.0	458.5	35.54	13.900		
5,100.0	5,100.0	5,067.6	5,058.4	18.3	18.1	-86.04	34.5	-499.6	502.7	466.5	36.25	13.869		
5,200.0	5,200.0	5,167.2	5,157.7	18.7	18.4	-85.94	36.1	-508.2	511.4	474.4	36.95	13.839		
5,300.0	5,300.0	5,266.8	5,256.9	19.0	18.8	-85.84	37.6	-516.7	520.0	482.4	37.66	13.810		
5,400.0	5,400.0	5,366.4	5,356.1	19.4	19.1	-85.75	39.1	-525.3	528.7	490.4	38.36	13.782		
5,500.0	5,500.0	5,466.0	5,455.4	19.7	19.5	-85.65	40.6	-533.8	537.4	498.3	39.07	13.755		
5,600.0	5,600.0	5,565.8	5,554.7	20.1	19.8	19.45	42.1	-542.4	544.4	504.7	39.76	13.691		
5,700.0	5,699.8	5,665.7	5,654.3	20.4	20.2	19.70	43.6	-551.0	548.2	507.7	40.45	13.552		
5,730.0	5,729.8	5,695.6	5,684.1	20.5	20.3	19.80	44.1	-553.5	548.7	508.0	40.66	13.495		
5,800.0	5,799.5	5,765.6	5,753.8	20.7	20.6	20.05	45.1	-559.5	549.5	508.3	41.14	13.357		
5,900.0	5,899.2	5,865.5	5,853.4	21.1	20.9	20.42	46.6	-568.1	550.6	508.8	41.83	13.165		
6,000.0	5,998.9	5,965.5	5,952.9	21.4	21.3	20.78	48.1	-576.7	551.8	509.3	42.52	12.979		
6,100.0	6,098.6	6,065.4	6,052.5	21.7	21.6	21.14	49.6	-585.3	553.0	509.8	43.21	12.800		
6,200.0	6,198.2	6,165.3	6,152.0	22.1	22.0	21.50	51.2	-593.8	554.3	510.4	43.90	12.626		
6,300.0	6,297.9	6,265.3	6,251.6	22.4	22.3	21.86	52.7	-602.4	555.5	510.9	44.59	12.457		
6,400.0	6,397.6	6,365.2	6,351.1	22.8	22.7	22.21	54.2	-611.0	556.8	511.5	45.29	12.294		
6,500.0	6,497.3	6,465.1	6,450.7	23.1	23.1	22.57	55.7	-619.6	558.1	512.1	45.98	12.137		
6,600.0	6,597.0	6,565.1	6,550.2	23.4	23.4	22.92	57.2	-628.2	559.4	512.7	46.68	11.984		
6,700.0	6,696.6	6,665.0	6,649.8	23.8	23.8	23.27	58.7	-636.7	560.8	513.4	47.38	11.835		
6,800.0	6,796.3	6,764.9	6,749.3	24.1	24.1	23.62	60.2	-645.3	562.1	514.0	48.08	11.692		
6,900.0	6,896.0	6,864.9	6,848.9	24.5	24.5	23.97	61.7	-653.9	563.5	514.7	48.78	11.552		
7,000.0	6,995.7	6,964.8	6,948.4	24.8	24.9	24.31	63.3	-662.5	564.9	515.4	49.48	11.417		
7,100.0	7,095.3	7,064.7	7,048.0	25.1	25.2	24.66	64.8	-671.0	566.3	516.1	50.18	11.286		
7,200.0	7,195.0	7,164.7	7,147.5	25.5	25.6	25.00	66.3	-679.6	567.8	516.9	50.88	11.158		
7,300.0	7,294.7	7,264.6	7,247.1	25.8	25.9	25.34	67.8	-688.2	569.2	517.6	51.58	11.035		
7,400.0	7,394.4	7,364.5	7,346.6	26.2	26.3	25.68	69.3	-696.8	570.7	518.4	52.29	10.915		
7,500.0	7,494.1	7,464.4	7,446.2	26.5	26.6	26.02	70.8	-705.4	572.2	519.2	52.99	10.798		
7,600.0	7,593.7	7,564.4	7,545.7	26.9	27.0	26.35	72.3	-713.9	573.7	520.0	53.70	10.684		
7,700.0	7,693.4	7,664.3	7,645.3	27.2	27.4	26.69	73.8	-722.5	575.3	520.9	54.40	10.574		
7,800.0	7,793.1	7,764.2	7,744.8	27.6	27.7	27.02	75.4	-731.1	576.8	521.7	55.11	10.467		
7,900.0	7,892.8	7,864.2	7,844.4	27.9	28.1	27.35	76.9	-739.7	578.4	522.6	55.82	10.363		
8,000.0	7,992.4	7,964.1	7,943.9	28.3	28.4	27.68	78.4	-748.2	580.0	523.5	56.52	10.261		
8,100.0	8,092.1	8,064.0	8,043.5	28.6	28.8	28.00	79.9	-756.8	581.6	524.4	57.23	10.163		
8,200.0	8,191.8	8,164.0	8,143.1	29.0	29.2	28.33	81.4	-765.4	583.3	525.3	57.94	10.067		
8,300.0	8,291.5	8,263.9	8,242.6	29.3	29.5	28.65	82.9	-774.0	584.9	526.3	58.65	9.973		
8,400.0	8,391.2	8,363.8	8,342.2	29.7	29.9	28.97	84.4	-782.6	586.6	527.2	59.36	9.882		
8,500.0	8,490.8	8,463.8	8,441.7	30.0	30.2	29.29	85.9	-791.1	588.3	528.2	60.07	9.793		
8,600.0	8,590.5	8,563.7	8,541.3	30.4	30.6	29.61	87.5	-799.7	590.0	529.2	60.78	9.707		
8,700.0	8,690.2	8,663.6	8,640.8	30.7	31.0	29.92	89.0	-808.3	591.7	530.2	61.49	9.623		
8,800.0	8,789.9	8,763.6	8,740.4	31.1	31.3	30.24	90.5	-816.9	593.5	531.3	62.20	9.541		
8,900.0	8,889.5	8,863.5	8,839.9	31.4	31.7	30.55	92.0	-825.4	595.2	532.3	62.92	9.461		
9,000.0	8,989.2	8,963.4	8,939.5	31.8	32.1	30.86	93.5	-834.0	597.0	533.4	63.63	9.383		
9,100.0	9,088.9	9,063.4	9,039.0	32.1	32.4	31.17	95.0	-842.6	598.8	534.5	64.34	9.307		
9,200.0	9,188.6	9,163.3	9,138.6	32.5	32.8	31.47	96.5	-851.2	600.6	535.6	65.06	9.233		
9,300.0	9,288.3	9,263.2	9,238.1	32.8	33.1	31.78	98.0	-859.7	602.5	536.7	65.77	9.160		
9,400.0	9,387.9	9,363.2	9,337.7	33.2	33.5	32.08	99.6	-868.3	604.3	537.8	66.48	9.090		
9,500.0	9,487.6	9,463.1	9,437.2	33.5	33.9	32.38	101.1	-876.9	606.2	539.0	67.20	9.021		
9,600.0	9,587.3	9,563.0	9,536.8	33.9	34.2	32.68	102.6	-885.5	608.1	540.2	67.91	8.954		
9,700.0	9,687.0	9,663.0	9,636.3	34.2	34.6	32.98	104.1	-894.1	610.0	541.3	68.63	8.888		
9,800.0	9,786.6	9,762.9	9,735.9	34.6	34.9	33.27	105.6	-902.6	611.9	542.6	69.34	8.824		
9,900.0	9,886.3	9,862.8	9,835.4	34.9	35.3	33.56	107.1	-911.2	613.8	543.8	70.06	8.761		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Offset Design CABO WABO FEDERAL PROJECT (ATLAS 2529) - CABO WABO FED COM #803H - OWB - PWP0											Offset Site Error:		3.0 usft	
Survey Program: 0-MWD+IFR1+FDIR											Offset Well Error:		3.0 usft	
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
10,000.0	9,986.0	9,962.7	9,935.0	35.3	35.7	33.86	108.6	-919.8	615.8	545.0	70.78	8.700		
10,100.0	10,085.7	10,062.7	10,034.5	35.7	36.0	34.15	110.1	-928.4	617.7	546.2	71.49	8.641		
10,197.9	10,183.3	10,160.6	10,132.0	36.0	36.4	34.43	111.6	-936.8	619.7	547.5	72.20	8.583		
10,200.0	10,185.4	10,162.6	10,134.1	36.0	36.4	36.88	111.7	-936.9	619.7	547.5	72.21	8.582		
10,250.0	10,235.1	10,212.4	10,183.7	36.2	36.6	74.95	112.4	-941.2	621.5	549.0	72.57	8.565 SF		
10,300.0	10,284.3	10,261.7	10,232.8	36.4	36.8	88.86	113.2	-945.4	624.9	552.0	72.92	8.570		
10,350.0	10,332.7	10,310.0	10,280.9	36.5	36.9	95.54	113.9	-949.6	629.9	556.6	73.27	8.597		
10,400.0	10,379.8	10,357.1	10,327.8	36.7	37.1	99.62	114.6	-953.6	636.8	563.2	73.61	8.651		
10,450.0	10,425.4	10,402.4	10,373.0	36.8	37.3	102.48	115.3	-957.5	645.7	571.8	73.94	8.733		
10,500.0	10,469.1	10,445.8	10,416.2	37.0	37.4	104.64	115.9	-961.3	657.0	582.7	74.26	8.847		
10,550.0	10,510.4	10,486.9	10,457.1	37.1	37.6	106.27	116.6	-964.8	670.7	596.1	74.57	8.994		
10,600.0	10,549.2	10,525.3	10,495.4	37.3	37.7	107.43	117.1	-968.1	687.1	612.3	74.86	9.179		
10,650.0	10,585.2	10,560.8	10,530.8	37.4	37.8	108.12	117.7	-971.1	706.4	631.3	75.13	9.403		
10,700.0	10,618.0	10,593.1	10,562.9	37.5	38.0	108.30	118.2	-973.9	728.6	653.2	75.38	9.666		
10,750.0	10,647.3	10,621.9	10,591.6	37.6	38.1	107.91	118.6	-976.4	753.8	678.2	75.60	9.970		
10,800.0	10,673.1	10,647.1	10,616.7	37.7	38.1	106.86	119.0	-978.5	781.8	706.0	75.80	10.314		
10,850.0	10,695.1	10,668.4	10,637.9	37.8	38.2	105.06	119.3	-980.4	812.5	736.5	75.97	10.695		
10,900.0	10,713.0	10,685.7	10,655.2	37.9	38.3	102.43	119.6	-981.8	845.7	769.6	76.11	11.111		
10,950.0	10,726.9	10,698.8	10,668.2	38.0	38.3	98.84	119.8	-983.0	881.1	804.9	76.23	11.559		
11,000.0	10,736.5	10,707.7	10,677.1	38.1	38.4	94.24	119.9	-983.7	918.4	842.1	76.31	12.035		
11,050.0	10,741.8	10,712.2	10,681.6	38.2	38.4	88.59	120.0	-984.1	957.2	880.9	76.37	12.534		
11,085.7	10,743.0	10,712.8	10,682.2	38.2	38.4	83.95	120.0	-984.2	985.7	909.3	76.39	12.902		
11,100.0	10,743.0	10,712.6	10,682.0	38.2	38.4	83.93	120.0	-984.2	997.2	920.8	76.40	13.052		

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Reference Depths are relative to KB=27' @ 3173.0usft (Nabors 893)

Offset Depths are relative to Offset Datum


Central Meridian is 104° 20' 0.000 W

Coordinates are relative to: CABO WABO FED COM #702H

Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30

Grid Convergence at Surface is: 0.21°

Ladder Plot

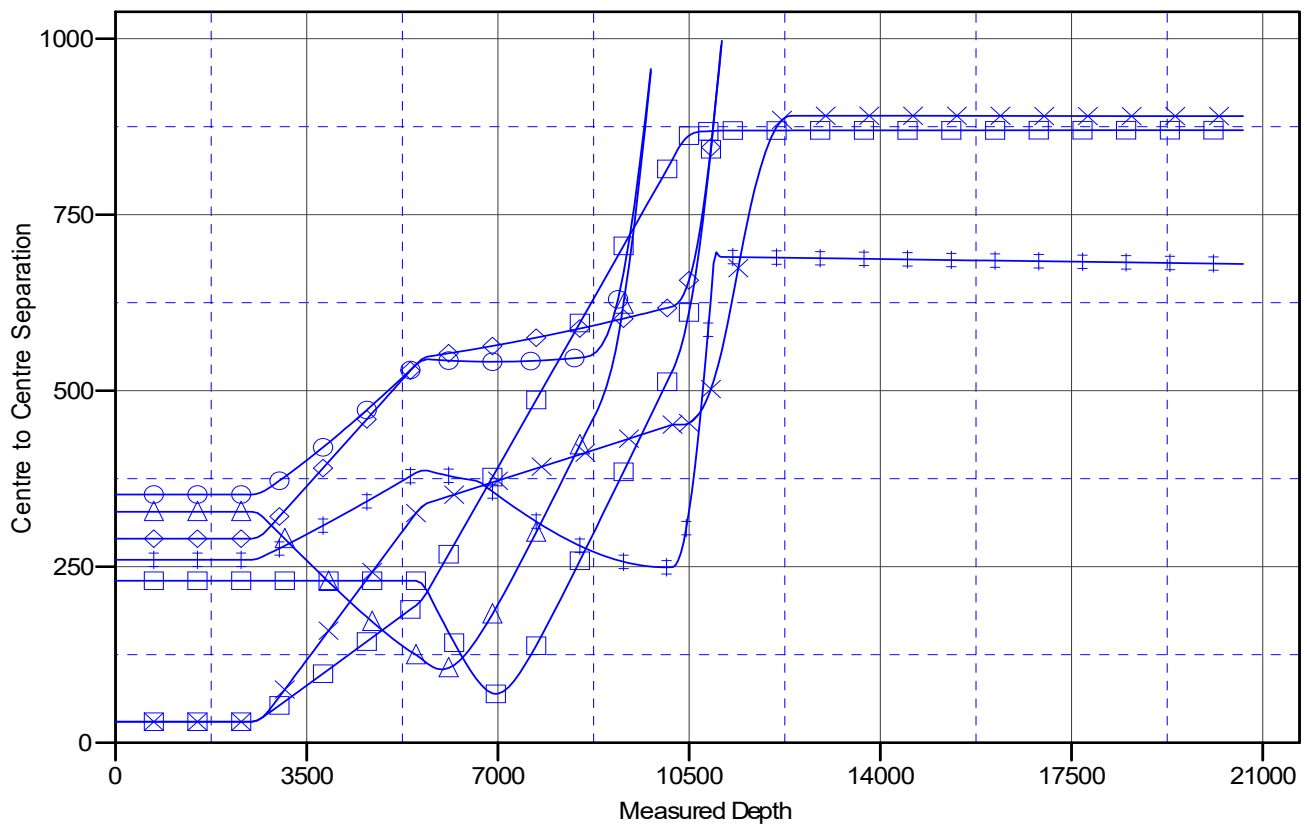

LEGEND

	CABO WABO FED COM #703H, OWB, PWP1 V0		CABO WABO FED COM #802H, OWB, PWP0 V0		CABO WABO FED COM #803H, OWB, PWP0 V0
	CABO WABO FED COM #804H, OWB, PWP0 V0		CABO WABO FED COM #805H, OWB, PWP0 V0		CABO WABO FED COM #806H, OWB, PWP0 V0
	CABO WABO FED COM #701H, OWB, PWP1 V0		CABO WABO FED COM #807H, OWB, PWP0 V0		

Concho Resources LLC

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Reference Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	CABO WABO FED COM #702H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP2	Offset TVD Reference:	Offset Datum

Reference Depths are relative to KB=27' @ 3173.0usft (Nabors 893)

Offset Depths are relative to Offset Datum


Central Meridian is 104° 20' 0.000 W

Coordinates are relative to: CABO WABO FED COM #702H

Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30

Grid Convergence at Surface is: 0.21°

Separation Factor Plot

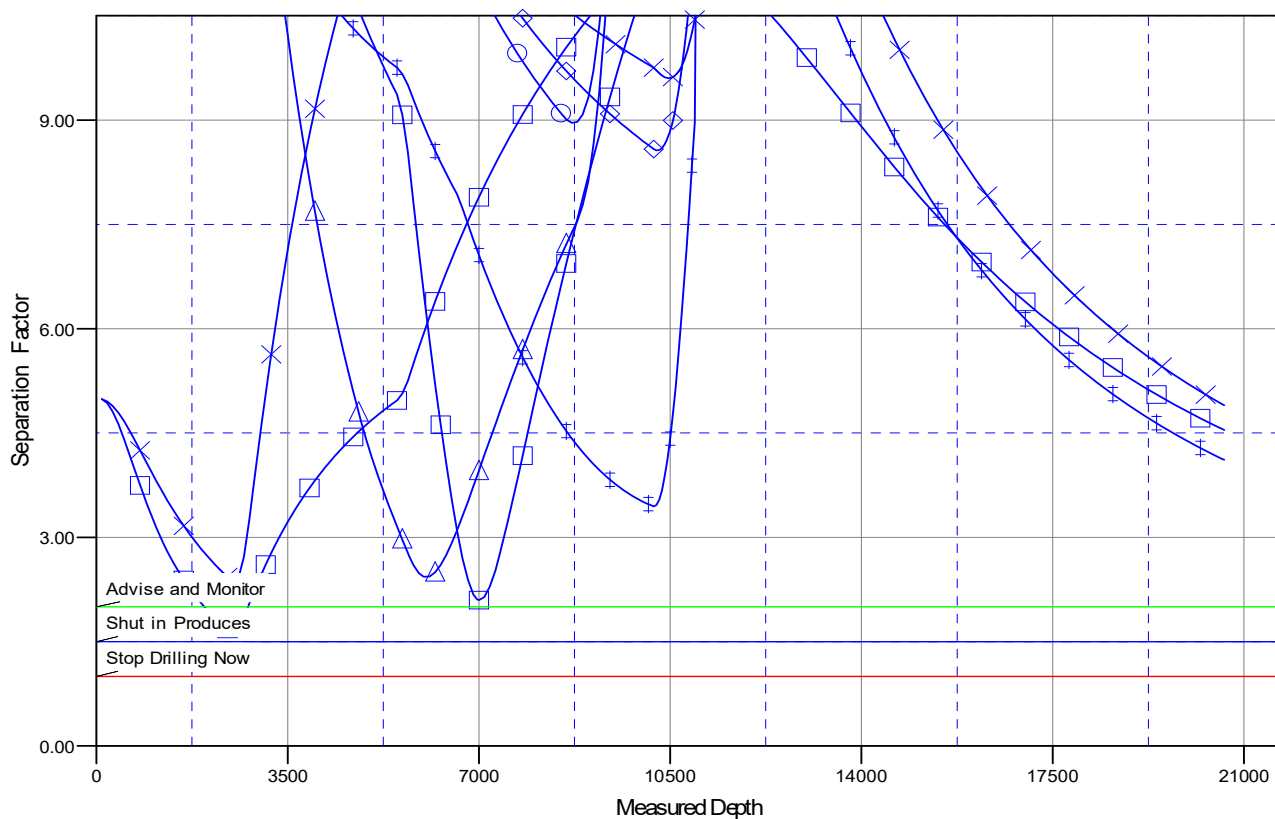

LEGEND

	CABO WABO FED COM #703H, OWB, PWP1 V0		CABO WABO FED COM #804H, OWB, PWP0 V0		CABO WABO FED COM #804H, OWB, PWP0 V0
	CABO WABO FED COM #704H, OWB, PWP1 V0		CABO WABO FED COM #804H, OWB, PWP0 V0		CABO WABO FED COM #804H, OWB, PWP0 V0

DELAWARE BASIN WEST

ATLAS PROSPECT (NM-E)

CABO WABO FEDERAL PROJECT (ATLAS 2529)

CABO WABO FED COM #702H

OWB

Plan: PWP2

Standard Survey Report

26 May, 2020

Concho Resources LLC

Survey Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Well:	CABO WABO FED COM #702H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	PWP2	Database:	edm

Project	ATLAS PROSPECT (NM-E)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Well	CABO WABO FED COM #702H			
Well Position	+N/-S	0.0 usft	Northing:	408,376.09 usft
	+E/-W	0.0 usft	Easting:	624,295.45 usft
Position Uncertainty		3.0 usft	Wellhead Elevation:	usft
			Latitude:	32° 7' 19.581 N
			Longitude:	103° 55' 54.631 W
			Ground Level:	3,146.0 usft

Wellbore	OWB
-----------------	-----

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	5/19/2020	6.83	59.79	47,509.70573539

Design	PWP2			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	181.87

Survey Tool Program	Date	5/26/2020		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
0.0	20,639.0	PWP2 (OWB)	MWD+IFR1+FDIR	OWSG MWD + IFR1 + FDIR Correction

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00	
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00	
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00	
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00	
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00	
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00	
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00	
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00	
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00	

Concho Resources LLC

Survey Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Well:	CABO WABO FED COM #702H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	PWP2	Database:	edm

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
2,100.0	0.00	0.00	2,100.0	0.0	0.0	0.0	0.00	0.00	0.00
2,200.0	0.00	0.00	2,200.0	0.0	0.0	0.0	0.00	0.00	0.00
2,300.0	0.00	0.00	2,300.0	0.0	0.0	0.0	0.00	0.00	0.00
2,400.0	0.00	0.00	2,400.0	0.0	0.0	0.0	0.00	0.00	0.00
2,500.0	0.00	0.00	2,500.0	0.0	0.0	0.0	0.00	0.00	0.00
2,600.0	0.00	0.00	2,600.0	0.0	0.0	0.0	0.00	0.00	0.00
2,700.0	0.00	0.00	2,700.0	0.0	0.0	0.0	0.00	0.00	0.00
2,800.0	0.00	0.00	2,800.0	0.0	0.0	0.0	0.00	0.00	0.00
2,900.0	0.00	0.00	2,900.0	0.0	0.0	0.0	0.00	0.00	0.00
3,000.0	0.00	0.00	3,000.0	0.0	0.0	0.0	0.00	0.00	0.00
3,100.0	0.00	0.00	3,100.0	0.0	0.0	0.0	0.00	0.00	0.00
3,200.0	0.00	0.00	3,200.0	0.0	0.0	0.0	0.00	0.00	0.00
3,300.0	0.00	0.00	3,300.0	0.0	0.0	0.0	0.00	0.00	0.00
3,400.0	0.00	0.00	3,400.0	0.0	0.0	0.0	0.00	0.00	0.00
3,500.0	0.00	0.00	3,500.0	0.0	0.0	0.0	0.00	0.00	0.00
3,600.0	0.00	0.00	3,600.0	0.0	0.0	0.0	0.00	0.00	0.00
3,700.0	0.00	0.00	3,700.0	0.0	0.0	0.0	0.00	0.00	0.00
3,800.0	0.00	0.00	3,800.0	0.0	0.0	0.0	0.00	0.00	0.00
3,900.0	0.00	0.00	3,900.0	0.0	0.0	0.0	0.00	0.00	0.00
4,000.0	0.00	0.00	4,000.0	0.0	0.0	0.0	0.00	0.00	0.00
4,100.0	0.00	0.00	4,100.0	0.0	0.0	0.0	0.00	0.00	0.00
4,200.0	0.00	0.00	4,200.0	0.0	0.0	0.0	0.00	0.00	0.00
4,300.0	0.00	0.00	4,300.0	0.0	0.0	0.0	0.00	0.00	0.00
4,400.0	0.00	0.00	4,400.0	0.0	0.0	0.0	0.00	0.00	0.00
4,500.0	0.00	0.00	4,500.0	0.0	0.0	0.0	0.00	0.00	0.00
4,600.0	0.00	0.00	4,600.0	0.0	0.0	0.0	0.00	0.00	0.00
4,700.0	0.00	0.00	4,700.0	0.0	0.0	0.0	0.00	0.00	0.00
4,800.0	0.00	0.00	4,800.0	0.0	0.0	0.0	0.00	0.00	0.00
4,900.0	0.00	0.00	4,900.0	0.0	0.0	0.0	0.00	0.00	0.00
5,000.0	0.00	0.00	5,000.0	0.0	0.0	0.0	0.00	0.00	0.00
5,100.0	0.00	0.00	5,100.0	0.0	0.0	0.0	0.00	0.00	0.00
5,200.0	0.00	0.00	5,200.0	0.0	0.0	0.0	0.00	0.00	0.00
5,300.0	0.00	0.00	5,300.0	0.0	0.0	0.0	0.00	0.00	0.00
5,400.0	0.00	0.00	5,400.0	0.0	0.0	0.0	0.00	0.00	0.00
5,500.0	0.00	0.00	5,500.0	0.0	0.0	0.0	0.00	0.00	0.00
Start Build 2.00									

Concho Resources LLC

Survey Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Well:	CABO WABO FED COM #702H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	PWP2	Database:	edm

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,600.0	2.00	255.00	5,600.0	-0.5	-1.7	0.5	2.00	2.00	0.00
5,700.0	4.00	255.00	5,699.8	-1.8	-6.7	2.0	2.00	2.00	0.00
5,730.0	4.60	255.00	5,729.8	-2.4	-8.9	2.7	2.00	2.00	0.00
Start 4467.9 hold at 5730.0 MD									
5,800.0	4.60	255.00	5,799.5	-3.8	-14.3	4.3	0.00	0.00	0.00
5,900.0	4.60	255.00	5,899.2	-5.9	-22.1	6.6	0.00	0.00	0.00
6,000.0	4.60	255.00	5,998.9	-8.0	-29.8	9.0	0.00	0.00	0.00
6,100.0	4.60	255.00	6,098.6	-10.1	-37.6	11.3	0.00	0.00	0.00
6,200.0	4.60	255.00	6,198.2	-12.1	-45.3	13.6	0.00	0.00	0.00
6,300.0	4.60	255.00	6,297.9	-14.2	-53.1	15.9	0.00	0.00	0.00
6,400.0	4.60	255.00	6,397.6	-16.3	-60.8	18.3	0.00	0.00	0.00
6,500.0	4.60	255.00	6,497.3	-18.4	-68.6	20.6	0.00	0.00	0.00
6,600.0	4.60	255.00	6,597.0	-20.4	-76.3	22.9	0.00	0.00	0.00
6,700.0	4.60	255.00	6,696.6	-22.5	-84.1	25.3	0.00	0.00	0.00
6,800.0	4.60	255.00	6,796.3	-24.6	-91.8	27.6	0.00	0.00	0.00
6,900.0	4.60	255.00	6,896.0	-26.7	-99.5	29.9	0.00	0.00	0.00
7,000.0	4.60	255.00	6,995.7	-28.7	-107.3	32.2	0.00	0.00	0.00
7,100.0	4.60	255.00	7,095.3	-30.8	-115.0	34.6	0.00	0.00	0.00
7,200.0	4.60	255.00	7,195.0	-32.9	-122.8	36.9	0.00	0.00	0.00
7,300.0	4.60	255.00	7,294.7	-35.0	-130.5	39.2	0.00	0.00	0.00
7,400.0	4.60	255.00	7,394.4	-37.1	-138.3	41.5	0.00	0.00	0.00
7,500.0	4.60	255.00	7,494.1	-39.1	-146.0	43.9	0.00	0.00	0.00
7,600.0	4.60	255.00	7,593.7	-41.2	-153.8	46.2	0.00	0.00	0.00
7,700.0	4.60	255.00	7,693.4	-43.3	-161.5	48.5	0.00	0.00	0.00
7,800.0	4.60	255.00	7,793.1	-45.4	-169.3	50.9	0.00	0.00	0.00
7,900.0	4.60	255.00	7,892.8	-47.4	-177.0	53.2	0.00	0.00	0.00
8,000.0	4.60	255.00	7,992.4	-49.5	-184.8	55.5	0.00	0.00	0.00
8,100.0	4.60	255.00	8,092.1	-51.6	-192.5	57.8	0.00	0.00	0.00
8,200.0	4.60	255.00	8,191.8	-53.7	-200.3	60.2	0.00	0.00	0.00
8,300.0	4.60	255.00	8,291.5	-55.7	-208.0	62.5	0.00	0.00	0.00
8,400.0	4.60	255.00	8,391.2	-57.8	-215.7	64.8	0.00	0.00	0.00
8,500.0	4.60	255.00	8,490.8	-59.9	-223.5	67.1	0.00	0.00	0.00
8,600.0	4.60	255.00	8,590.5	-62.0	-231.2	69.5	0.00	0.00	0.00
8,700.0	4.60	255.00	8,690.2	-64.0	-239.0	71.8	0.00	0.00	0.00
8,800.0	4.60	255.00	8,789.9	-66.1	-246.7	74.1	0.00	0.00	0.00
8,900.0	4.60	255.00	8,889.5	-68.2	-254.5	76.5	0.00	0.00	0.00
9,000.0	4.60	255.00	8,989.2	-70.3	-262.2	78.8	0.00	0.00	0.00
9,100.0	4.60	255.00	9,088.9	-72.3	-270.0	81.1	0.00	0.00	0.00
9,200.0	4.60	255.00	9,188.6	-74.4	-277.7	83.4	0.00	0.00	0.00
9,300.0	4.60	255.00	9,288.3	-76.5	-285.5	85.8	0.00	0.00	0.00
9,400.0	4.60	255.00	9,387.9	-78.6	-293.2	88.1	0.00	0.00	0.00
9,500.0	4.60	255.00	9,487.6	-80.6	-301.0	90.4	0.00	0.00	0.00
9,600.0	4.60	255.00	9,587.3	-82.7	-308.7	92.7	0.00	0.00	0.00

Concho Resources LLC

Survey Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Well:	CABO WABO FED COM #702H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	PWP2	Database:	edm

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,700.0	4.60	255.00	9,687.0	-84.8	-316.5	95.1	0.00	0.00	0.00
9,800.0	4.60	255.00	9,786.6	-86.9	-324.2	97.4	0.00	0.00	0.00
9,900.0	4.60	255.00	9,886.3	-88.9	-331.9	99.7	0.00	0.00	0.00
10,000.0	4.60	255.00	9,986.0	-91.0	-339.7	102.1	0.00	0.00	0.00
10,100.0	4.60	255.00	10,085.7	-93.1	-347.4	104.4	0.00	0.00	0.00
10,197.9	4.60	255.00	10,183.3	-95.1	-355.0	106.7	0.00	0.00	0.00
Start DLS 10.00 TFO -75.42									
10,200.0	4.66	252.54	10,185.4	-95.2	-355.2	106.7	10.00	2.72	-119.26
10,300.0	12.20	200.74	10,284.3	-106.3	-362.8	118.1	10.00	7.54	-51.80
10,400.0	21.80	190.85	10,379.8	-134.5	-370.1	146.5	10.00	9.61	-9.89
10,500.0	31.65	186.88	10,469.1	-178.9	-376.7	191.1	10.00	9.84	-3.97
10,600.0	41.56	184.66	10,549.2	-238.1	-382.6	250.5	10.00	9.91	-2.22
10,700.0	51.50	183.18	10,618.0	-310.5	-387.5	322.9	10.00	9.94	-1.49
10,800.0	61.46	182.05	10,673.1	-393.6	-391.2	406.2	10.00	9.96	-1.12
10,900.0	71.42	181.13	10,713.0	-485.2	-393.7	497.7	10.00	9.96	-0.93
11,000.0	81.39	180.30	10,736.5	-582.2	-394.9	594.8	10.00	9.97	-0.82
11,085.7	89.94	179.63	10,743.0	-667.6	-394.9	680.2	10.00	9.97	-0.78
Start 9553.7 hold at 11085.7 MD									
11,100.0	89.94	179.63	10,743.0	-681.9	-394.8	694.4	0.00	0.00	0.00
11,200.0	89.94	179.63	10,743.1	-781.9	-394.1	794.3	0.00	0.00	0.00
11,300.0	89.94	179.63	10,743.2	-881.9	-393.5	894.3	0.00	0.00	0.00
11,400.0	89.94	179.63	10,743.3	-981.9	-392.9	994.2	0.00	0.00	0.00
11,500.0	89.94	179.63	10,743.4	-1,081.9	-392.2	1,094.1	0.00	0.00	0.00
11,600.0	89.94	179.63	10,743.5	-1,181.9	-391.6	1,194.0	0.00	0.00	0.00
11,700.0	89.94	179.63	10,743.6	-1,281.9	-390.9	1,294.0	0.00	0.00	0.00
11,800.0	89.94	179.63	10,743.7	-1,381.9	-390.3	1,393.9	0.00	0.00	0.00
11,900.0	89.94	179.63	10,743.8	-1,481.9	-389.6	1,493.8	0.00	0.00	0.00
12,000.0	89.94	179.63	10,743.9	-1,581.9	-389.0	1,593.7	0.00	0.00	0.00
12,100.0	89.94	179.63	10,744.0	-1,681.9	-388.4	1,693.7	0.00	0.00	0.00
12,200.0	89.94	179.63	10,744.1	-1,781.9	-387.7	1,793.6	0.00	0.00	0.00
12,300.0	89.94	179.63	10,744.2	-1,881.9	-387.1	1,893.5	0.00	0.00	0.00
12,400.0	89.94	179.63	10,744.3	-1,981.9	-386.4	1,993.4	0.00	0.00	0.00
12,500.0	89.94	179.63	10,744.4	-2,081.9	-385.8	2,093.4	0.00	0.00	0.00
12,600.0	89.94	179.63	10,744.6	-2,181.9	-385.2	2,193.3	0.00	0.00	0.00
12,700.0	89.94	179.63	10,744.7	-2,281.9	-384.5	2,293.2	0.00	0.00	0.00
12,800.0	89.94	179.63	10,744.8	-2,381.9	-383.9	2,393.1	0.00	0.00	0.00
12,900.0	89.94	179.63	10,744.9	-2,481.9	-383.2	2,493.0	0.00	0.00	0.00
13,000.0	89.94	179.63	10,745.0	-2,581.9	-382.6	2,593.0	0.00	0.00	0.00
13,100.0	89.94	179.63	10,745.1	-2,681.9	-381.9	2,692.9	0.00	0.00	0.00
13,200.0	89.94	179.63	10,745.2	-2,781.9	-381.3	2,792.8	0.00	0.00	0.00
13,300.0	89.94	179.63	10,745.3	-2,881.9	-380.7	2,892.7	0.00	0.00	0.00
13,400.0	89.94	179.63	10,745.4	-2,981.9	-380.0	2,992.7	0.00	0.00	0.00
13,500.0	89.94	179.63	10,745.5	-3,081.9	-379.4	3,092.6	0.00	0.00	0.00

Concho Resources LLC

Survey Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Well:	CABO WABO FED COM #702H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	PWP2	Database:	edm

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,600.0	89.94	179.63	10,745.6	-3,181.9	-378.7	3,192.5	0.00	0.00	0.00
13,700.0	89.94	179.63	10,745.7	-3,281.9	-378.1	3,292.4	0.00	0.00	0.00
13,800.0	89.94	179.63	10,745.8	-3,381.8	-377.5	3,392.4	0.00	0.00	0.00
13,900.0	89.94	179.63	10,745.9	-3,481.8	-376.8	3,492.3	0.00	0.00	0.00
14,000.0	89.94	179.63	10,746.0	-3,581.8	-376.2	3,592.2	0.00	0.00	0.00
14,100.0	89.94	179.63	10,746.1	-3,681.8	-375.5	3,692.1	0.00	0.00	0.00
14,200.0	89.94	179.63	10,746.2	-3,781.8	-374.9	3,792.1	0.00	0.00	0.00
14,300.0	89.94	179.63	10,746.3	-3,881.8	-374.2	3,892.0	0.00	0.00	0.00
14,400.0	89.94	179.63	10,746.4	-3,981.8	-373.6	3,991.9	0.00	0.00	0.00
14,500.0	89.94	179.63	10,746.5	-4,081.8	-373.0	4,091.8	0.00	0.00	0.00
14,600.0	89.94	179.63	10,746.7	-4,181.8	-372.3	4,191.8	0.00	0.00	0.00
14,700.0	89.94	179.63	10,746.8	-4,281.8	-371.7	4,291.7	0.00	0.00	0.00
14,800.0	89.94	179.63	10,746.9	-4,381.8	-371.0	4,391.6	0.00	0.00	0.00
14,900.0	89.94	179.63	10,747.0	-4,481.8	-370.4	4,491.5	0.00	0.00	0.00
15,000.0	89.94	179.63	10,747.1	-4,581.8	-369.8	4,591.4	0.00	0.00	0.00
15,100.0	89.94	179.63	10,747.2	-4,681.8	-369.1	4,691.4	0.00	0.00	0.00
15,200.0	89.94	179.63	10,747.3	-4,781.8	-368.5	4,791.3	0.00	0.00	0.00
15,300.0	89.94	179.63	10,747.4	-4,881.8	-367.8	4,891.2	0.00	0.00	0.00
15,400.0	89.94	179.63	10,747.5	-4,981.8	-367.2	4,991.1	0.00	0.00	0.00
15,500.0	89.94	179.63	10,747.6	-5,081.8	-366.5	5,091.1	0.00	0.00	0.00
15,600.0	89.94	179.63	10,747.7	-5,181.8	-365.9	5,191.0	0.00	0.00	0.00
15,700.0	89.94	179.63	10,747.8	-5,281.8	-365.3	5,290.9	0.00	0.00	0.00
15,800.0	89.94	179.63	10,747.9	-5,381.8	-364.6	5,390.8	0.00	0.00	0.00
15,900.0	89.94	179.63	10,748.0	-5,481.8	-364.0	5,490.8	0.00	0.00	0.00
16,000.0	89.94	179.63	10,748.1	-5,581.8	-363.3	5,590.7	0.00	0.00	0.00
16,100.0	89.94	179.63	10,748.2	-5,681.8	-362.7	5,690.6	0.00	0.00	0.00
16,200.0	89.94	179.63	10,748.3	-5,781.8	-362.0	5,790.5	0.00	0.00	0.00
16,300.0	89.94	179.63	10,748.4	-5,881.8	-361.4	5,890.5	0.00	0.00	0.00
16,400.0	89.94	179.63	10,748.5	-5,981.8	-360.8	5,990.4	0.00	0.00	0.00
16,500.0	89.94	179.63	10,748.6	-6,081.8	-360.1	6,090.3	0.00	0.00	0.00
16,600.0	89.94	179.63	10,748.8	-6,181.8	-359.5	6,190.2	0.00	0.00	0.00
16,700.0	89.94	179.63	10,748.9	-6,281.8	-358.8	6,290.1	0.00	0.00	0.00
16,800.0	89.94	179.63	10,749.0	-6,381.8	-358.2	6,390.1	0.00	0.00	0.00
16,900.0	89.94	179.63	10,749.1	-6,481.8	-357.6	6,490.0	0.00	0.00	0.00
17,000.0	89.94	179.63	10,749.2	-6,581.8	-356.9	6,589.9	0.00	0.00	0.00
17,100.0	89.94	179.63	10,749.3	-6,681.8	-356.3	6,689.8	0.00	0.00	0.00
17,200.0	89.94	179.63	10,749.4	-6,781.8	-355.6	6,789.8	0.00	0.00	0.00
17,300.0	89.94	179.63	10,749.5	-6,881.8	-355.0	6,889.7	0.00	0.00	0.00
17,400.0	89.94	179.63	10,749.6	-6,981.8	-354.3	6,989.6	0.00	0.00	0.00
17,500.0	89.94	179.63	10,749.7	-7,081.8	-353.7	7,089.5	0.00	0.00	0.00
17,600.0	89.94	179.63	10,749.8	-7,181.8	-353.1	7,189.5	0.00	0.00	0.00
17,700.0	89.94	179.63	10,749.9	-7,281.8	-352.4	7,289.4	0.00	0.00	0.00

Concho Resources LLC

Survey Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Well:	CABO WABO FED COM #702H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	PWP2	Database:	edm

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
17,800.0	89.94	179.63	10,750.0	-7,381.8	-351.8	7,389.3	0.00	0.00	0.00
17,900.0	89.94	179.63	10,750.1	-7,481.8	-351.1	7,489.2	0.00	0.00	0.00
18,000.0	89.94	179.63	10,750.2	-7,581.8	-350.5	7,589.2	0.00	0.00	0.00
18,100.0	89.94	179.63	10,750.3	-7,681.8	-349.9	7,689.1	0.00	0.00	0.00
18,200.0	89.94	179.63	10,750.4	-7,781.8	-349.2	7,789.0	0.00	0.00	0.00
18,300.0	89.94	179.63	10,750.5	-7,881.8	-348.6	7,888.9	0.00	0.00	0.00
18,400.0	89.94	179.63	10,750.6	-7,981.8	-347.9	7,988.9	0.00	0.00	0.00
18,500.0	89.94	179.63	10,750.8	-8,081.7	-347.3	8,088.8	0.00	0.00	0.00
18,600.0	89.94	179.63	10,750.9	-8,181.7	-346.6	8,188.7	0.00	0.00	0.00
18,700.0	89.94	179.63	10,751.0	-8,281.7	-346.0	8,288.6	0.00	0.00	0.00
18,800.0	89.94	179.63	10,751.1	-8,381.7	-345.4	8,388.5	0.00	0.00	0.00
18,900.0	89.94	179.63	10,751.2	-8,481.7	-344.7	8,488.5	0.00	0.00	0.00
19,000.0	89.94	179.63	10,751.3	-8,581.7	-344.1	8,588.4	0.00	0.00	0.00
19,100.0	89.94	179.63	10,751.4	-8,681.7	-343.4	8,688.3	0.00	0.00	0.00
19,200.0	89.94	179.63	10,751.5	-8,781.7	-342.8	8,788.2	0.00	0.00	0.00
19,300.0	89.94	179.63	10,751.6	-8,881.7	-342.1	8,888.2	0.00	0.00	0.00
19,400.0	89.94	179.63	10,751.7	-8,981.7	-341.5	8,988.1	0.00	0.00	0.00
19,500.0	89.94	179.63	10,751.8	-9,081.7	-340.9	9,088.0	0.00	0.00	0.00
19,600.0	89.94	179.63	10,751.9	-9,181.7	-340.2	9,187.9	0.00	0.00	0.00
19,700.0	89.94	179.63	10,752.0	-9,281.7	-339.6	9,287.9	0.00	0.00	0.00
19,800.0	89.94	179.63	10,752.1	-9,381.7	-338.9	9,387.8	0.00	0.00	0.00
19,900.0	89.94	179.63	10,752.2	-9,481.7	-338.3	9,487.7	0.00	0.00	0.00
20,000.0	89.94	179.63	10,752.3	-9,581.7	-337.7	9,587.6	0.00	0.00	0.00
20,100.0	89.94	179.63	10,752.4	-9,681.7	-337.0	9,687.6	0.00	0.00	0.00
20,200.0	89.94	179.63	10,752.5	-9,781.7	-336.4	9,787.5	0.00	0.00	0.00
20,300.0	89.94	179.63	10,752.6	-9,881.7	-335.7	9,887.4	0.00	0.00	0.00
20,400.0	89.94	179.63	10,752.7	-9,981.7	-335.1	9,987.3	0.00	0.00	0.00
20,500.0	89.94	179.63	10,752.9	-10,081.7	-334.4	10,087.3	0.00	0.00	0.00
20,600.0	89.94	179.63	10,753.0	-10,181.7	-333.8	10,187.2	0.00	0.00	0.00
20,639.4	89.94	179.63	10,753.0	-10,221.1	-333.5	10,226.6	0.00	0.00	0.00
TD at 20639.4									

Concho Resources LLC

Survey Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well CABO WABO FED COM #702H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Site:	CABO WABO FEDERAL PROJECT (ATLAS 2529)	MD Reference:	KB=27' @ 3173.0usft (Nabors 893)
Well:	CABO WABO FED COM #702H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	PWP2	Database:	edm

Design Targets

Target Name

- hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
FTP (CABO WABO FI - plan misses target center by 217.7usft at 10651.1usft MD (10585.9 TVD, -273.6 N, -385.2 E) - Circle (radius 50.0)	0.00	0.00	10,743.0	-123.5	-399.2	408,252.62	623,896.28	32° 7' 18.373 N	103° 55' 59.278 W
LTP (CABO WABO FE - plan misses target center by 0.1usft at 20509.4usft MD (10752.9 TVD, -10091.1 N, -334.4 E) - Point	0.00	0.00	10,753.0	-10,091.1	-334.4	398,284.96	623,961.05	32° 5' 39.728 N	103° 55' 58.955 W
PBHL (CABO WABO - plan hits target center - Rectangle (sides W100.0 H10,070.0 D20.0)	-0.06	359.63	10,753.0	-10,221.1	-333.5	398,154.96	623,961.90	32° 5' 38.441 N	103° 55' 58.951 W

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
5500	5500	0	0	Start Build 2.00
5730	5730	-2	-9	Start 4467.9 hold at 5730.0 MD
10,198	10,183	-95	-355	Start DLS 10.00 TFO -75.42
11,086	10,743	-668	-395	Start 9553.7 hold at 11085.7 MD
20,639	10,753	-10,221	-334	TD at 20639.4



Checked By: _____ Approved By: _____ Date: _____











Project: ATLAS PROSPECT (NM-E)
Site: CABO WABO FEDERAL PROJECT (ATLAS 2529)
Well: CABO WABO FED COM #702H
Wellbore: OWB
Design: PWP2
GL: 3146.0
KB=27" @ 3173.0usft (Nabors 893)

WELL DETAILS: CABO WABO FED COM #702H					
+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.0	0.0	408376.09	624295.45	32° 7' 19.581 N	103° 55' 54.631 W

DESIGN TARGET DETAILS						
Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude
FTP (CABO WABO FED COM 702H)	10743.0	-123.5	-399.2	408252.62	623896.28	32° 7' 18.373 N
LTP (CABO WABO FED COM 702H)	10753.0	-10091.1	-334.4	398284.96	623961.05	32° 5' 39.728 N
PBHL (CABO WABO FED COM 702H)	10753.0	-10221.1	-333.5	398154.96	623961.90	32° 5' 38.441 N

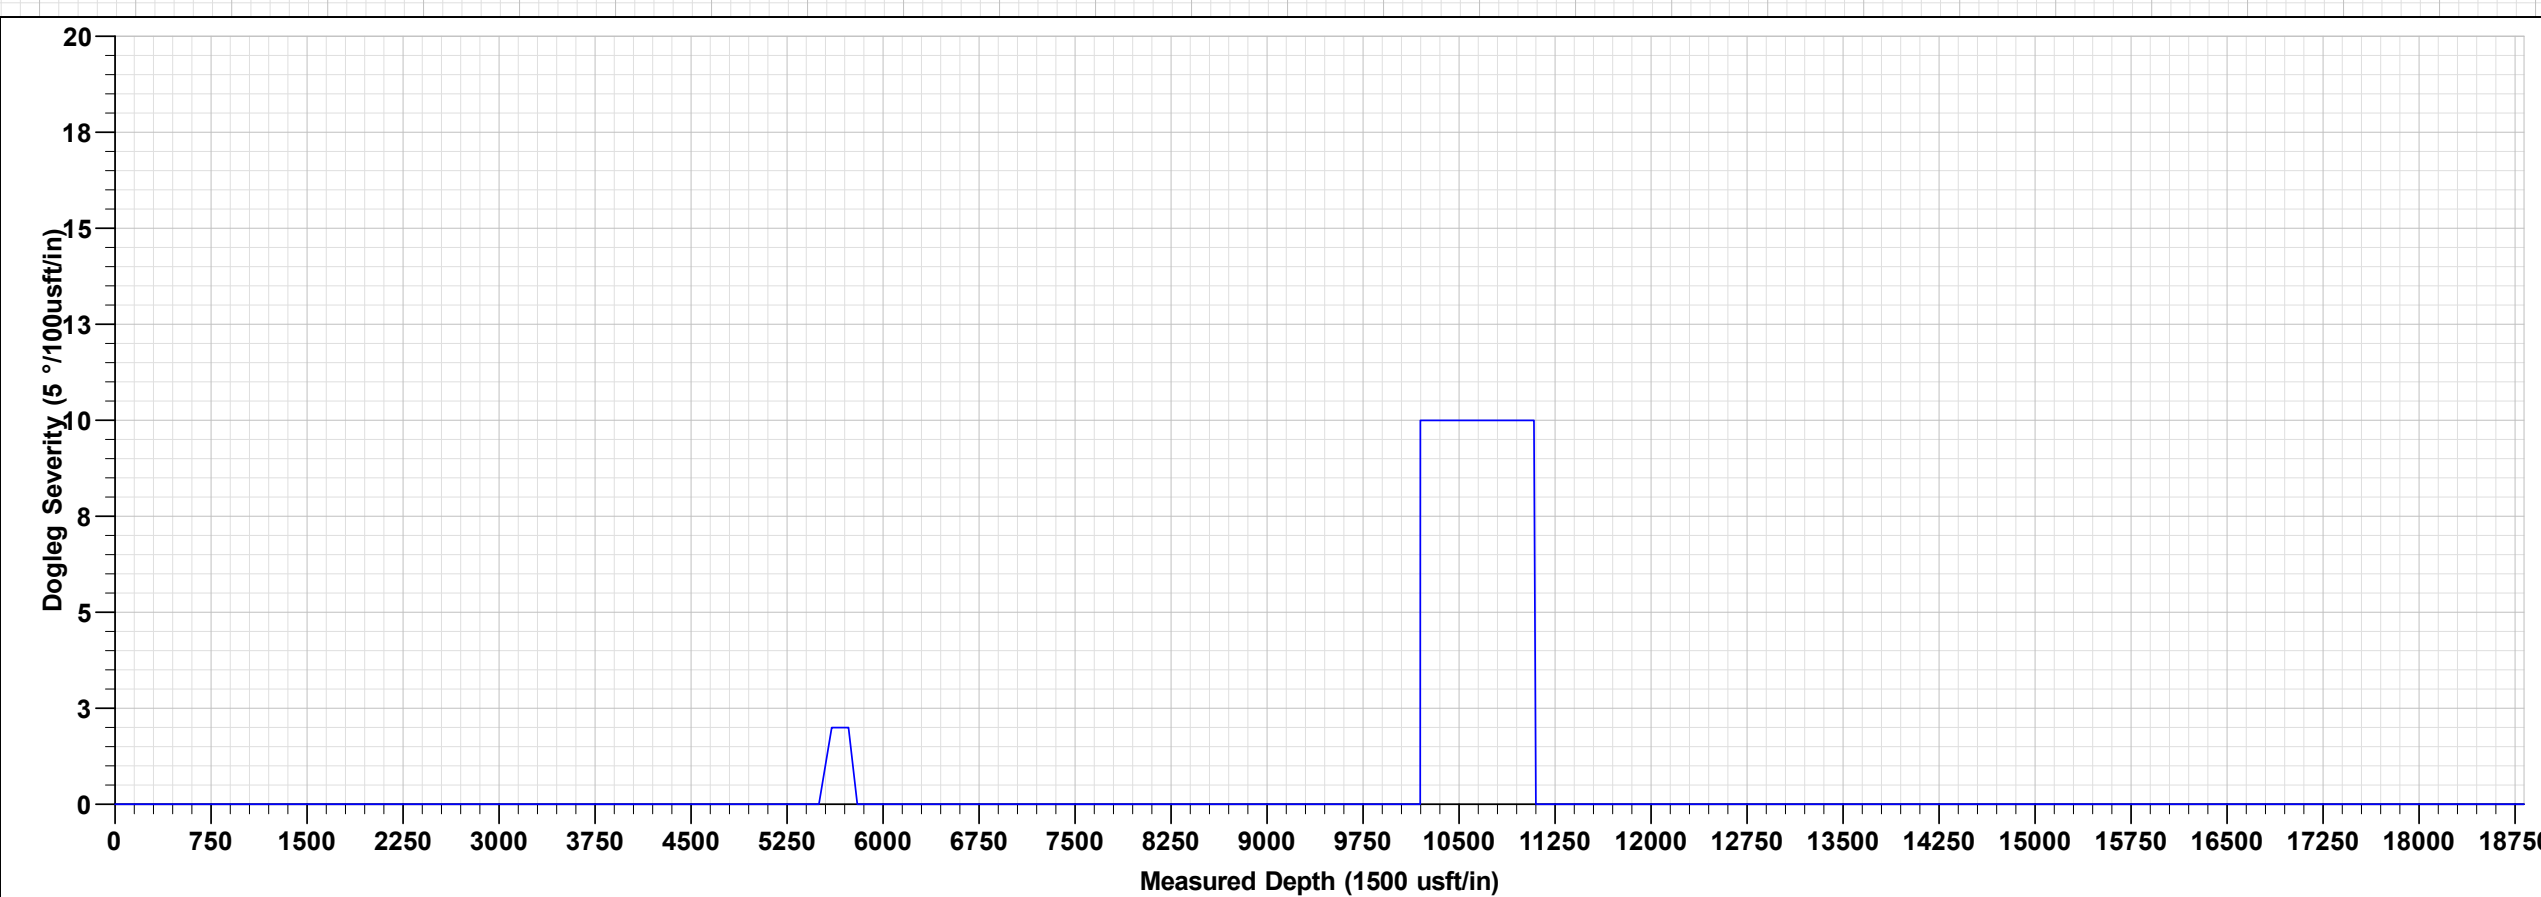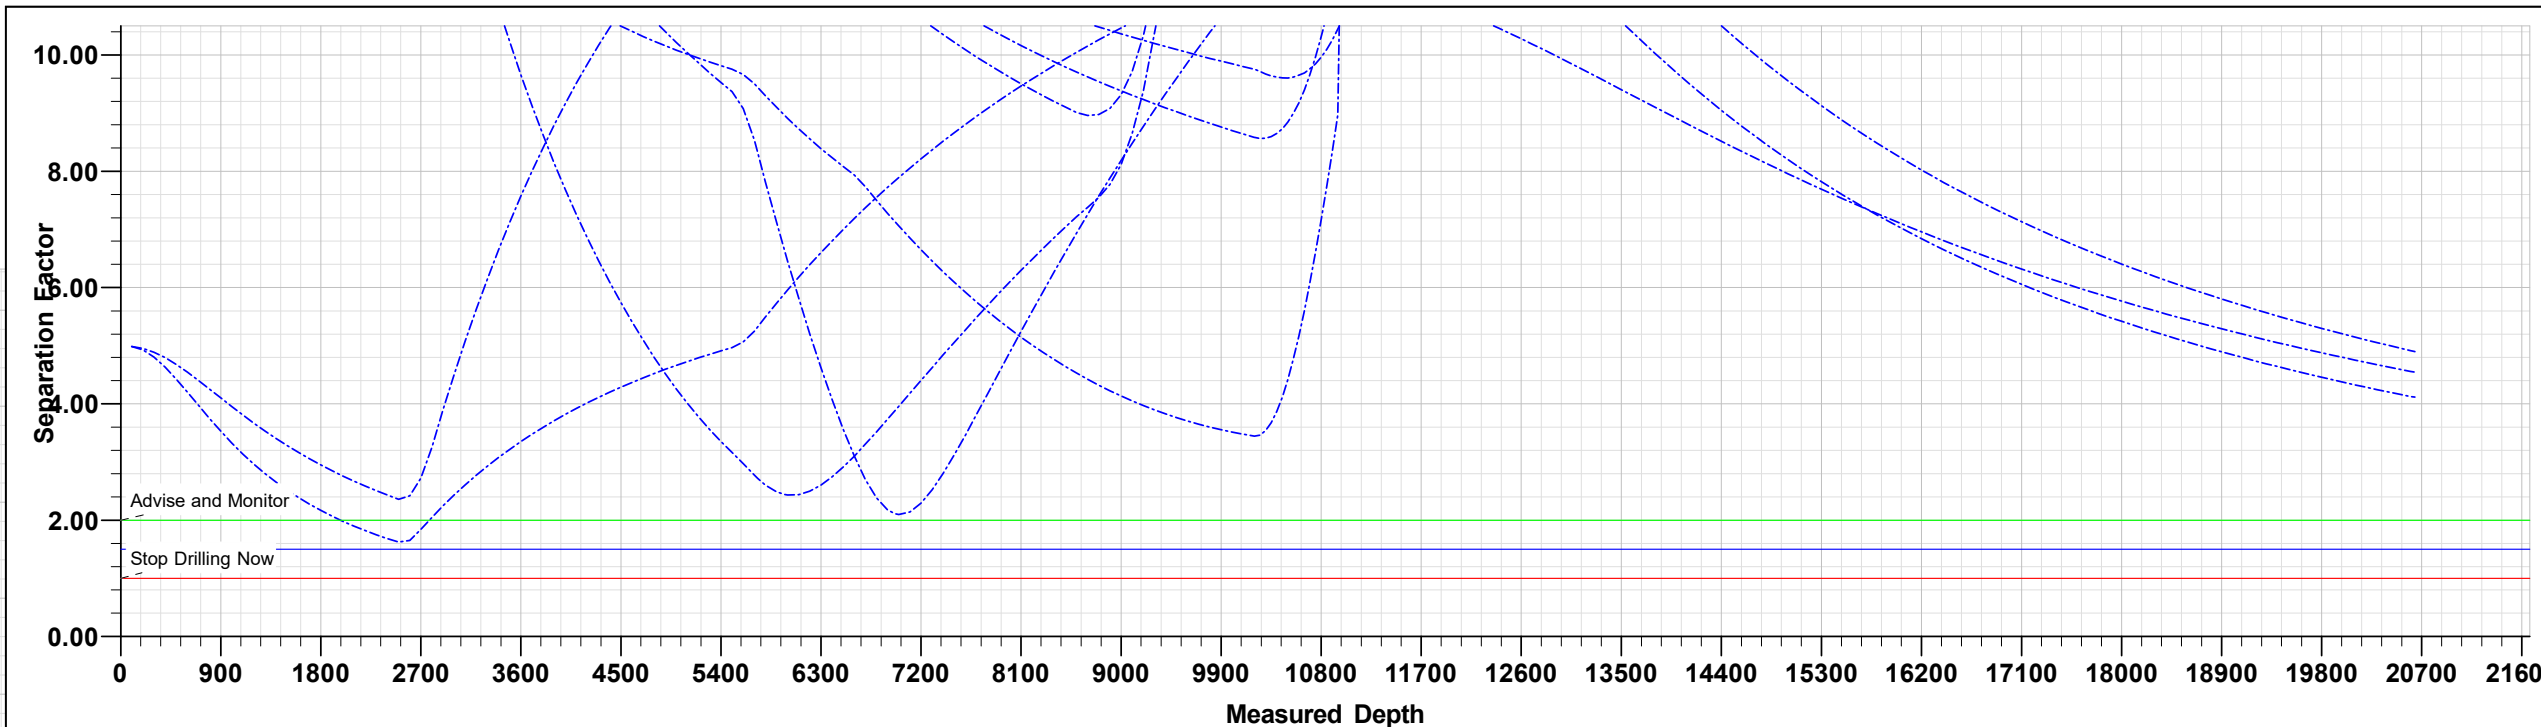

CABO WABO FED COM #702H									
MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSecl	Annotation
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	Start Build 2.00
5500.0	0.00	0.00	5500.0	0.0	0.0	0.00	0.00	0.0	
5730.0	4.60	255.00	5729.8	-2.4	-8.9	2.00	255.00	2.7	Start 4467.9 hold at 5730.0 MD
10197.9	4.60	255.00	10183.3	-95.1	-355.0	0.00	0.00	106.7	Start DLS 10.00 TFO -75.42
11085.7	89.94	179.63	10743.0	-667.6	-394.9	10.00	-75.42	680.2	Start 9553.7 hold at 11085.7 MD
20639.4	89.94	179.63	10753.0	-10221.1	-333.5	0.00	0.00	10226.6	TD at 20639.4

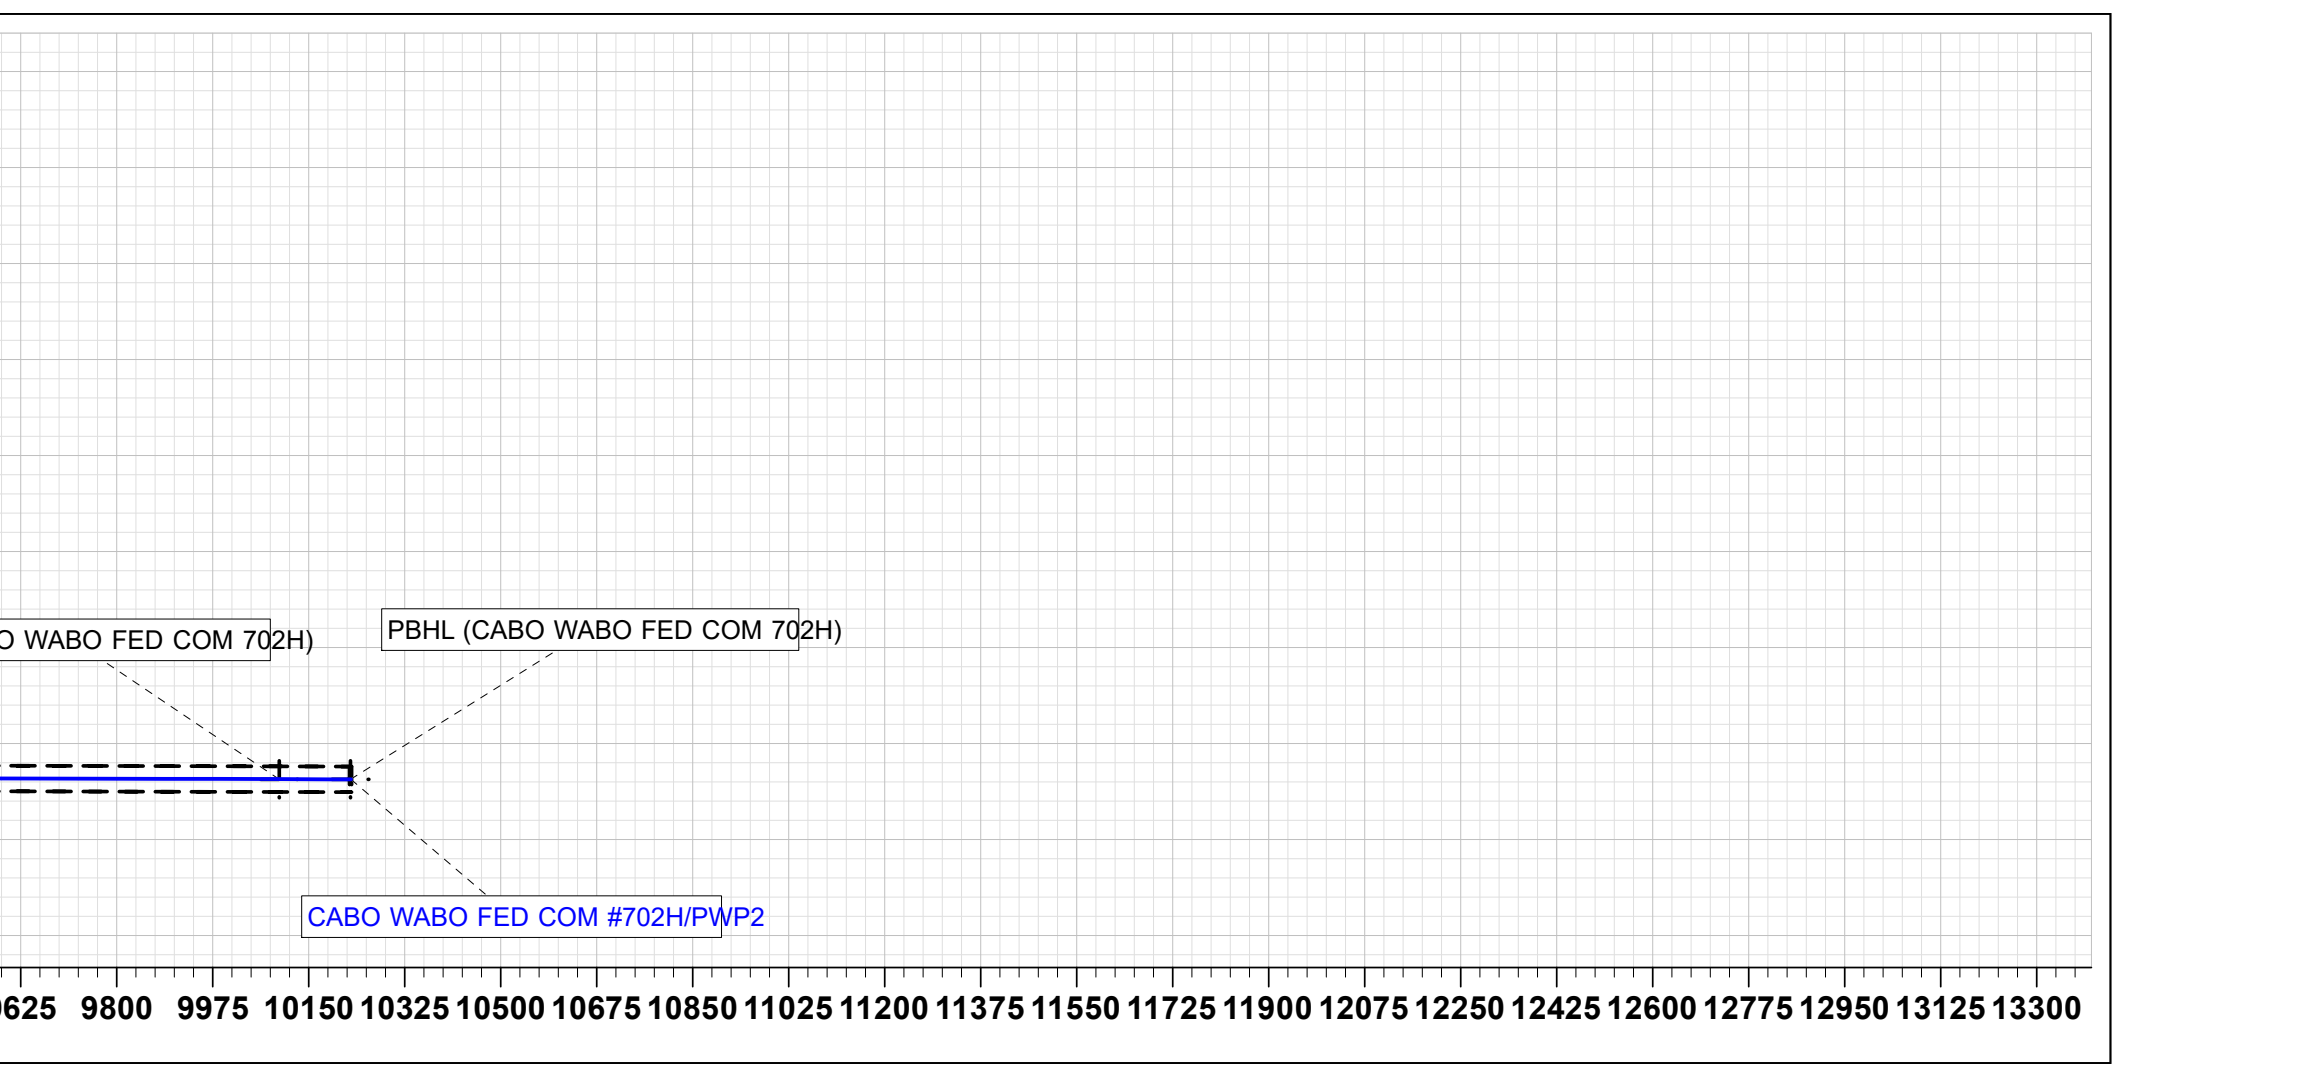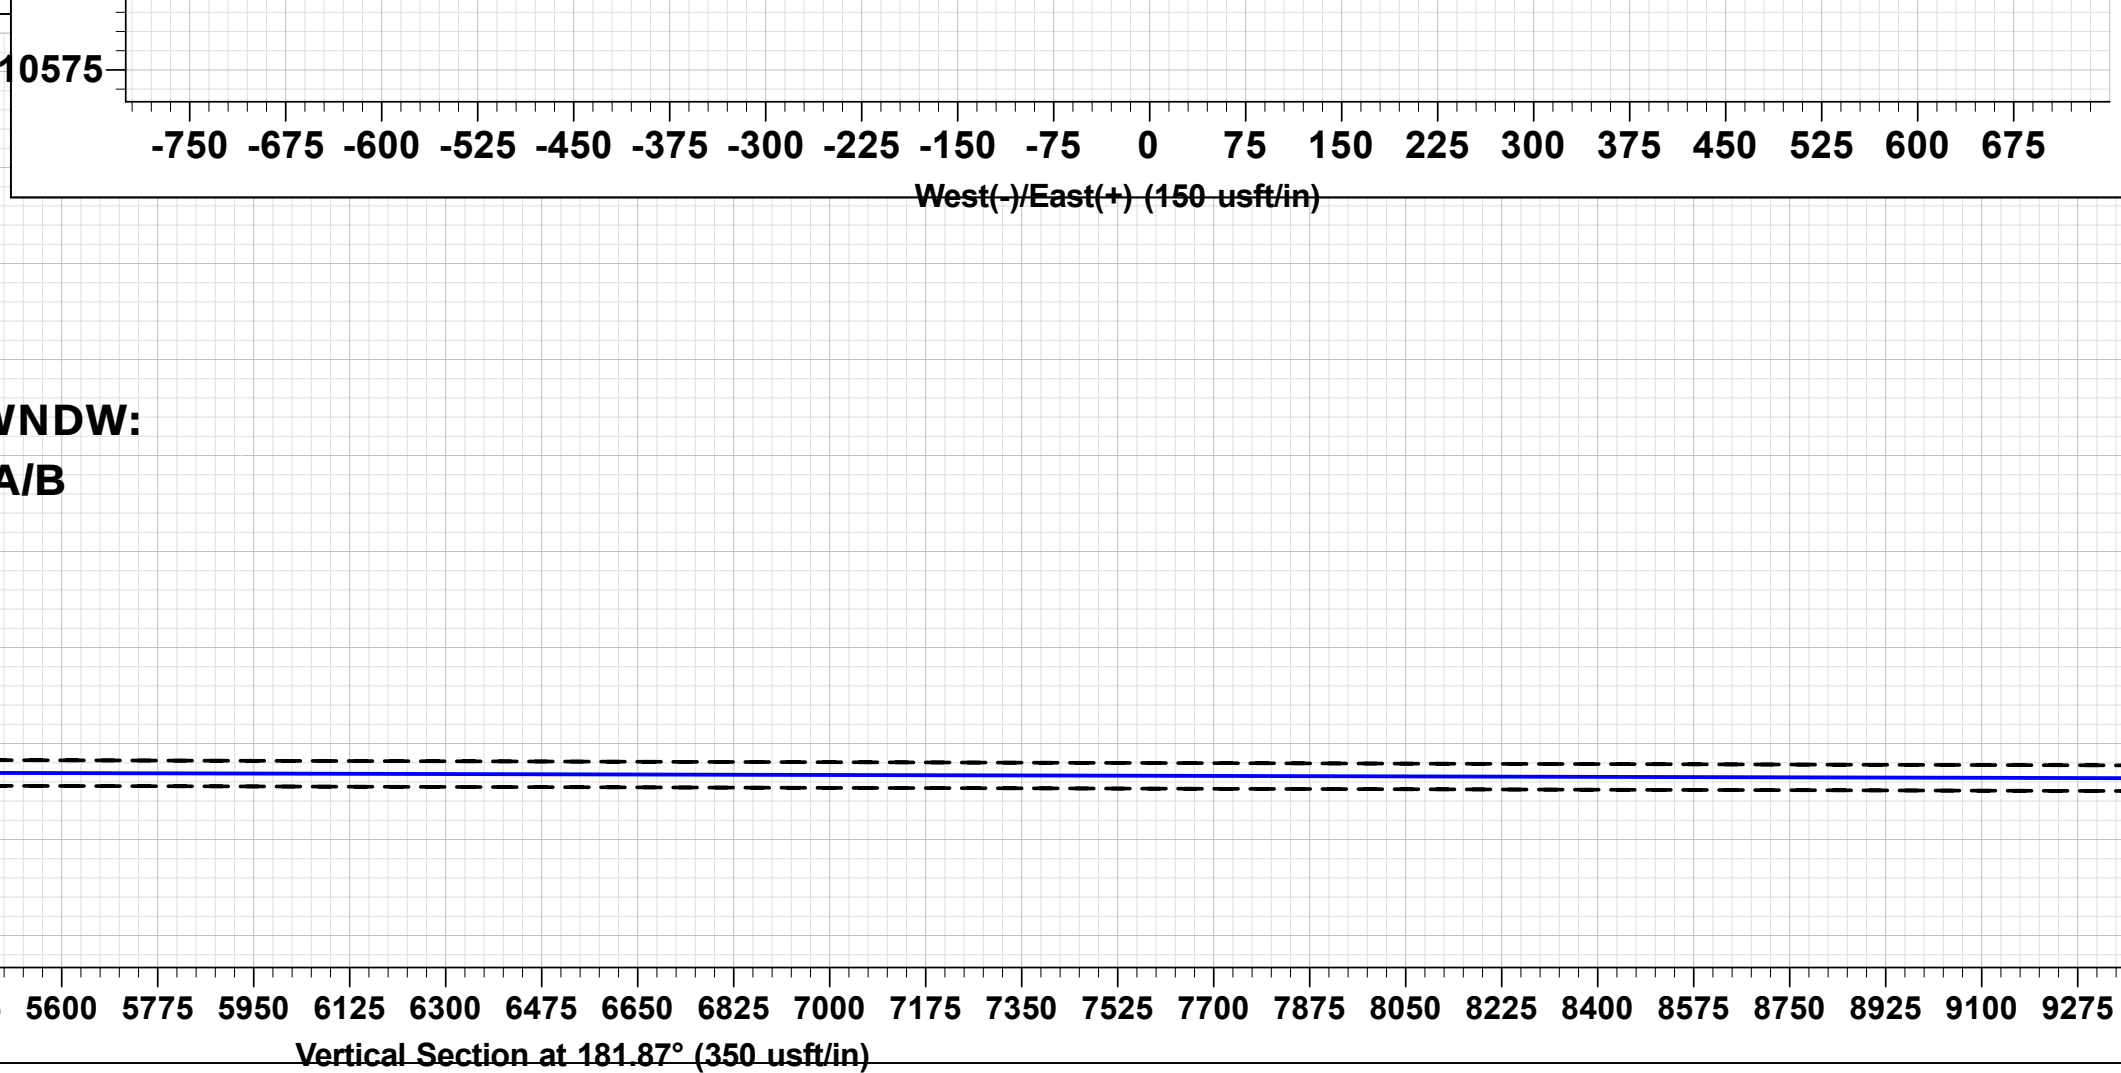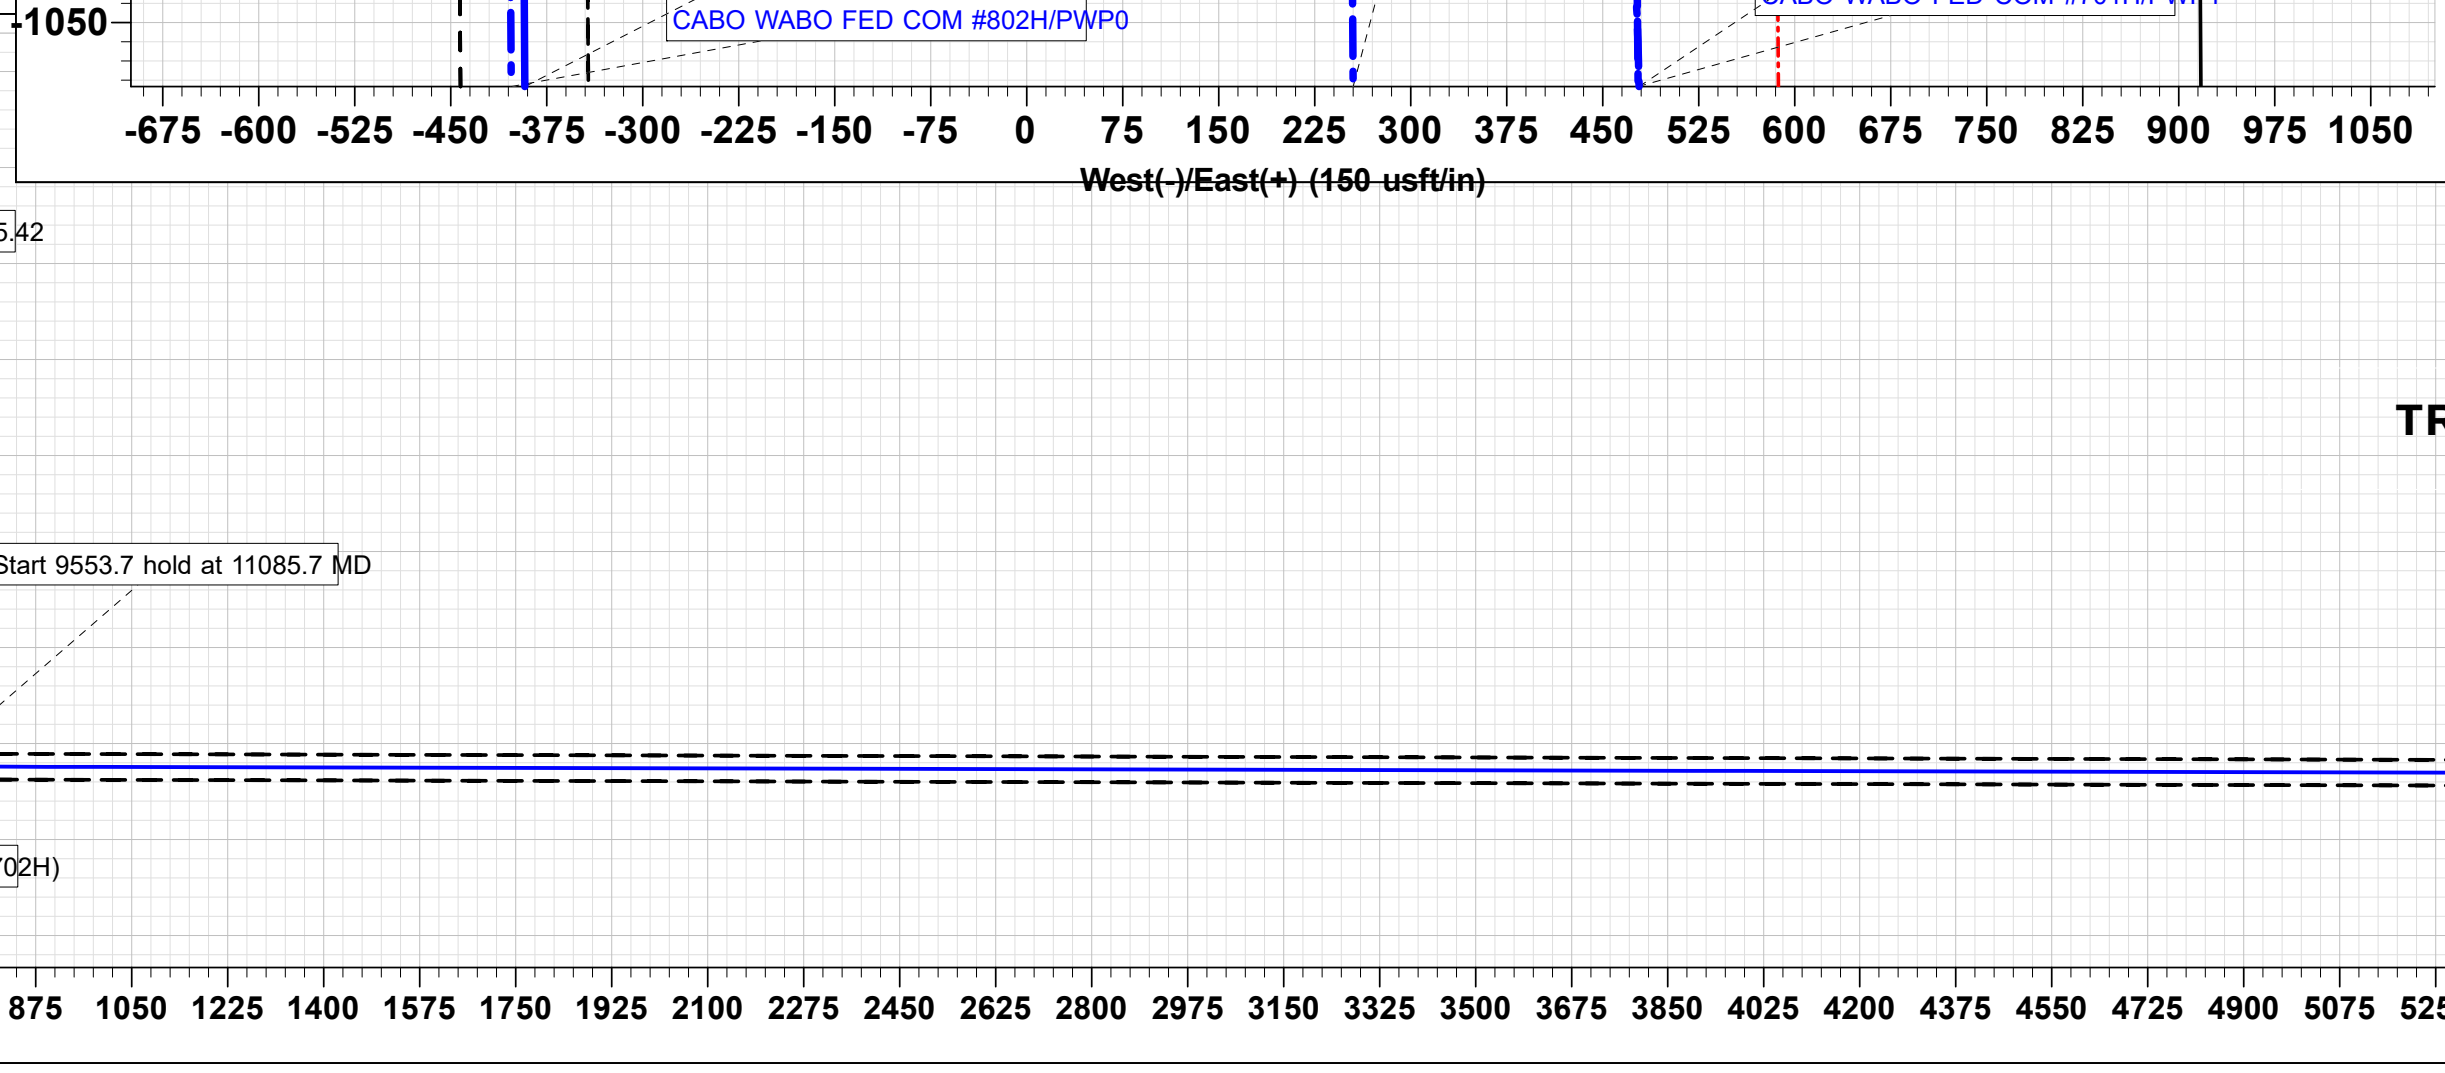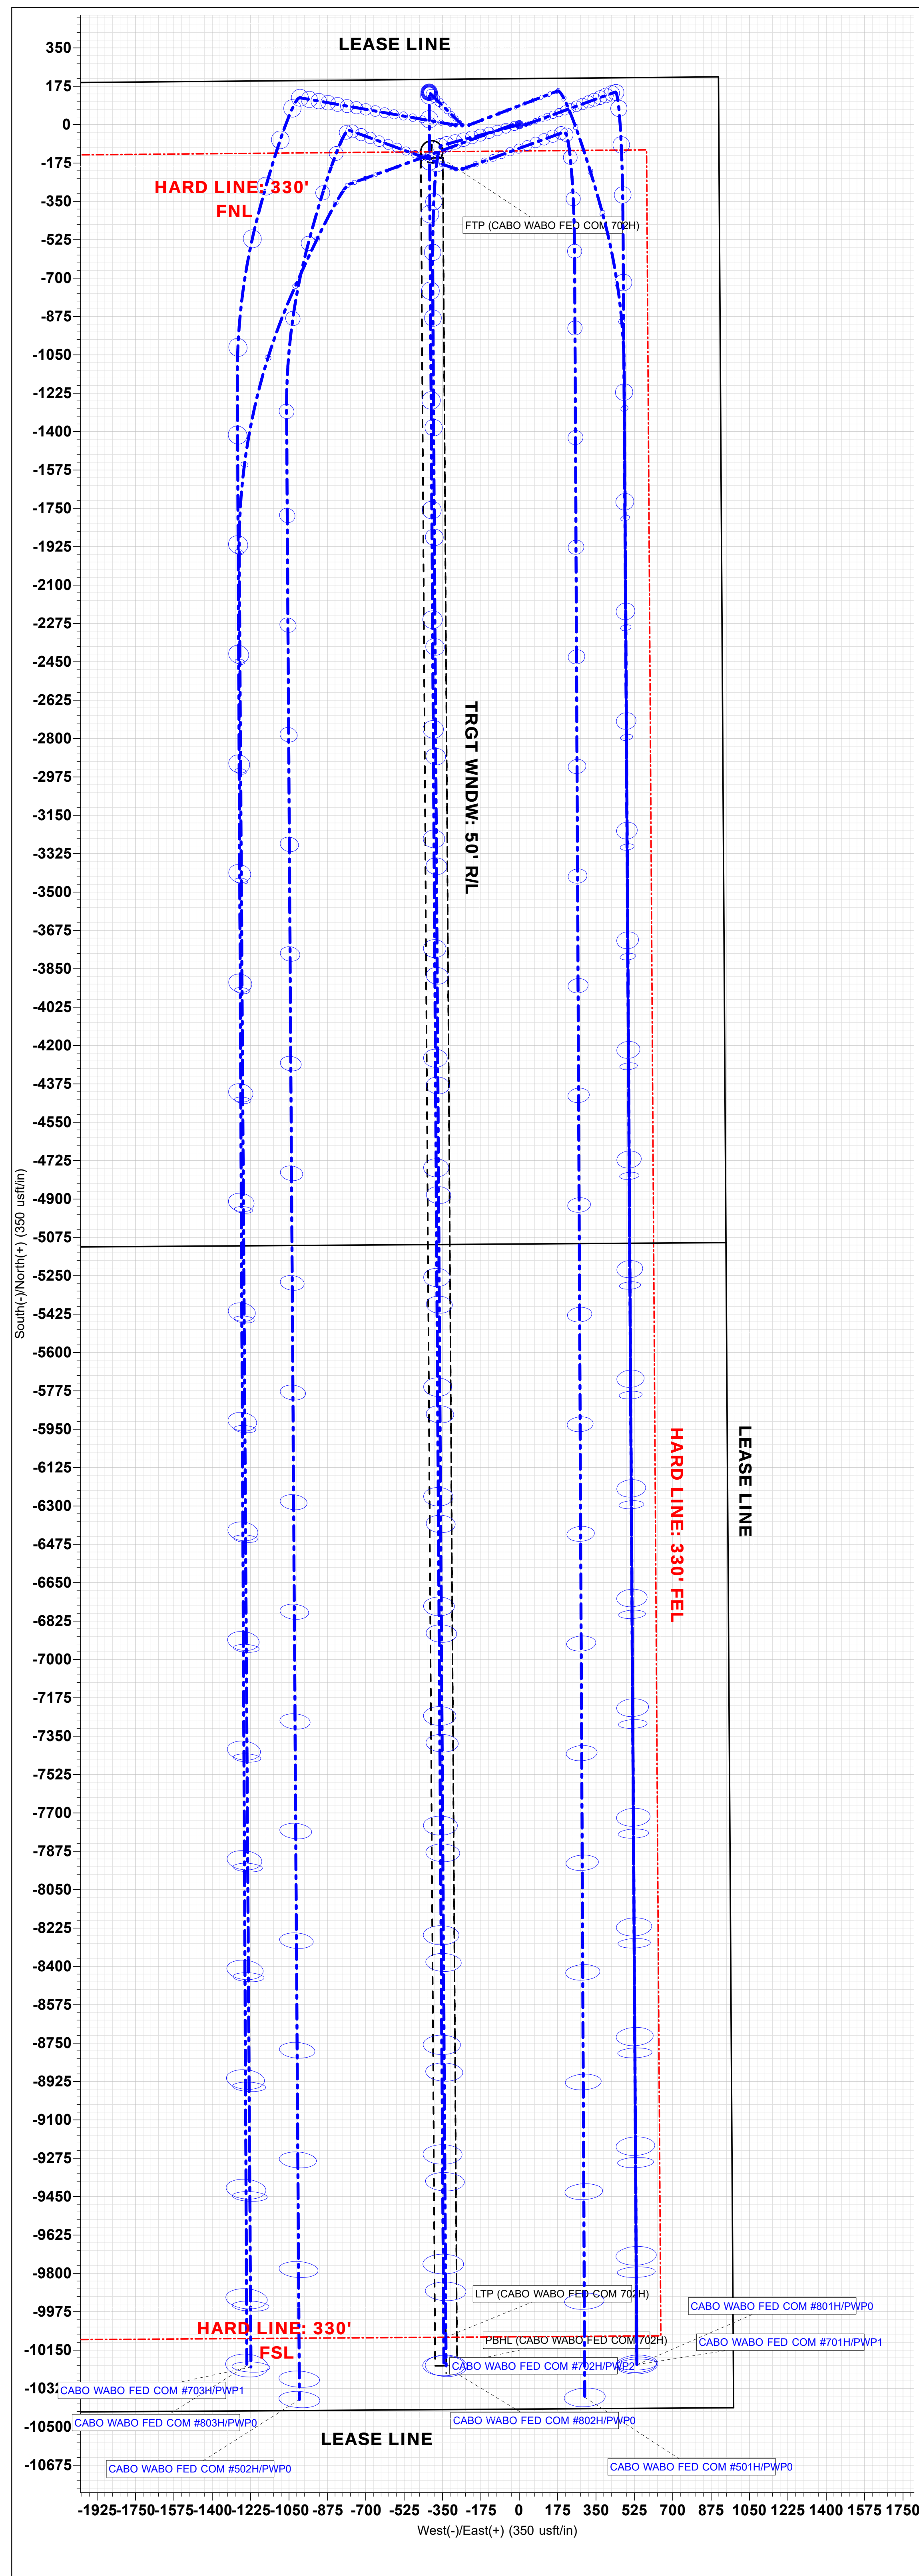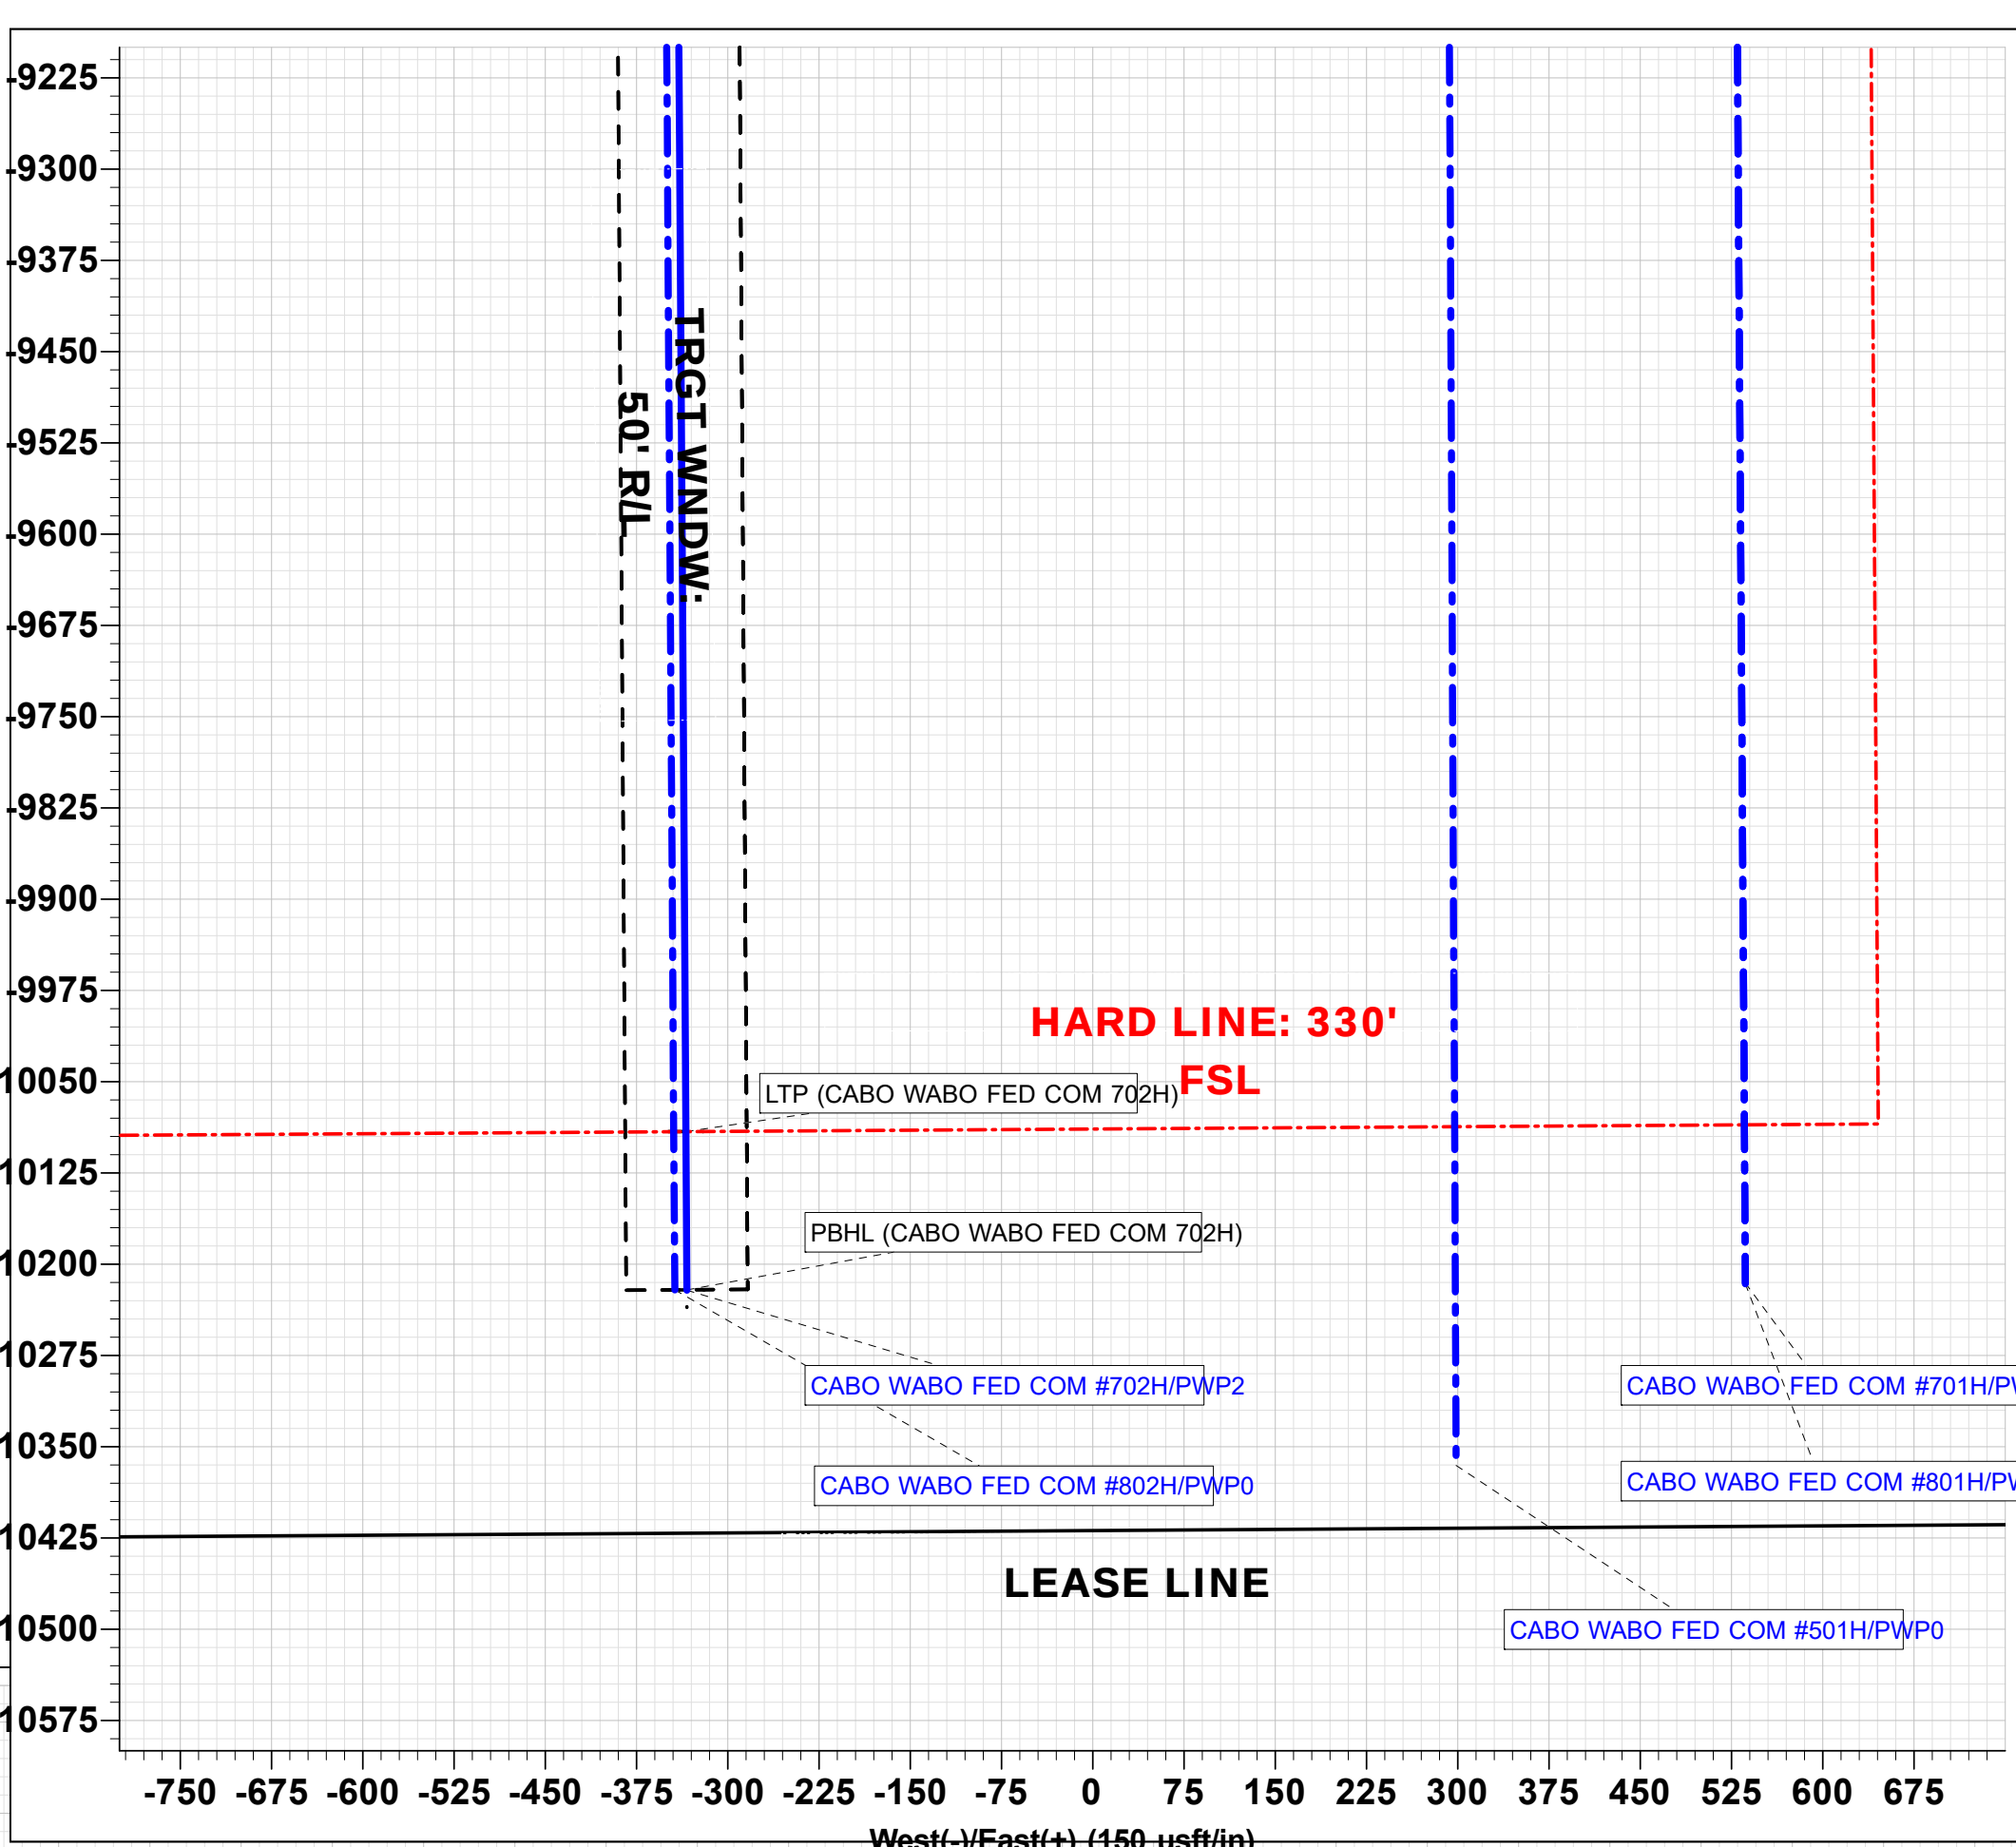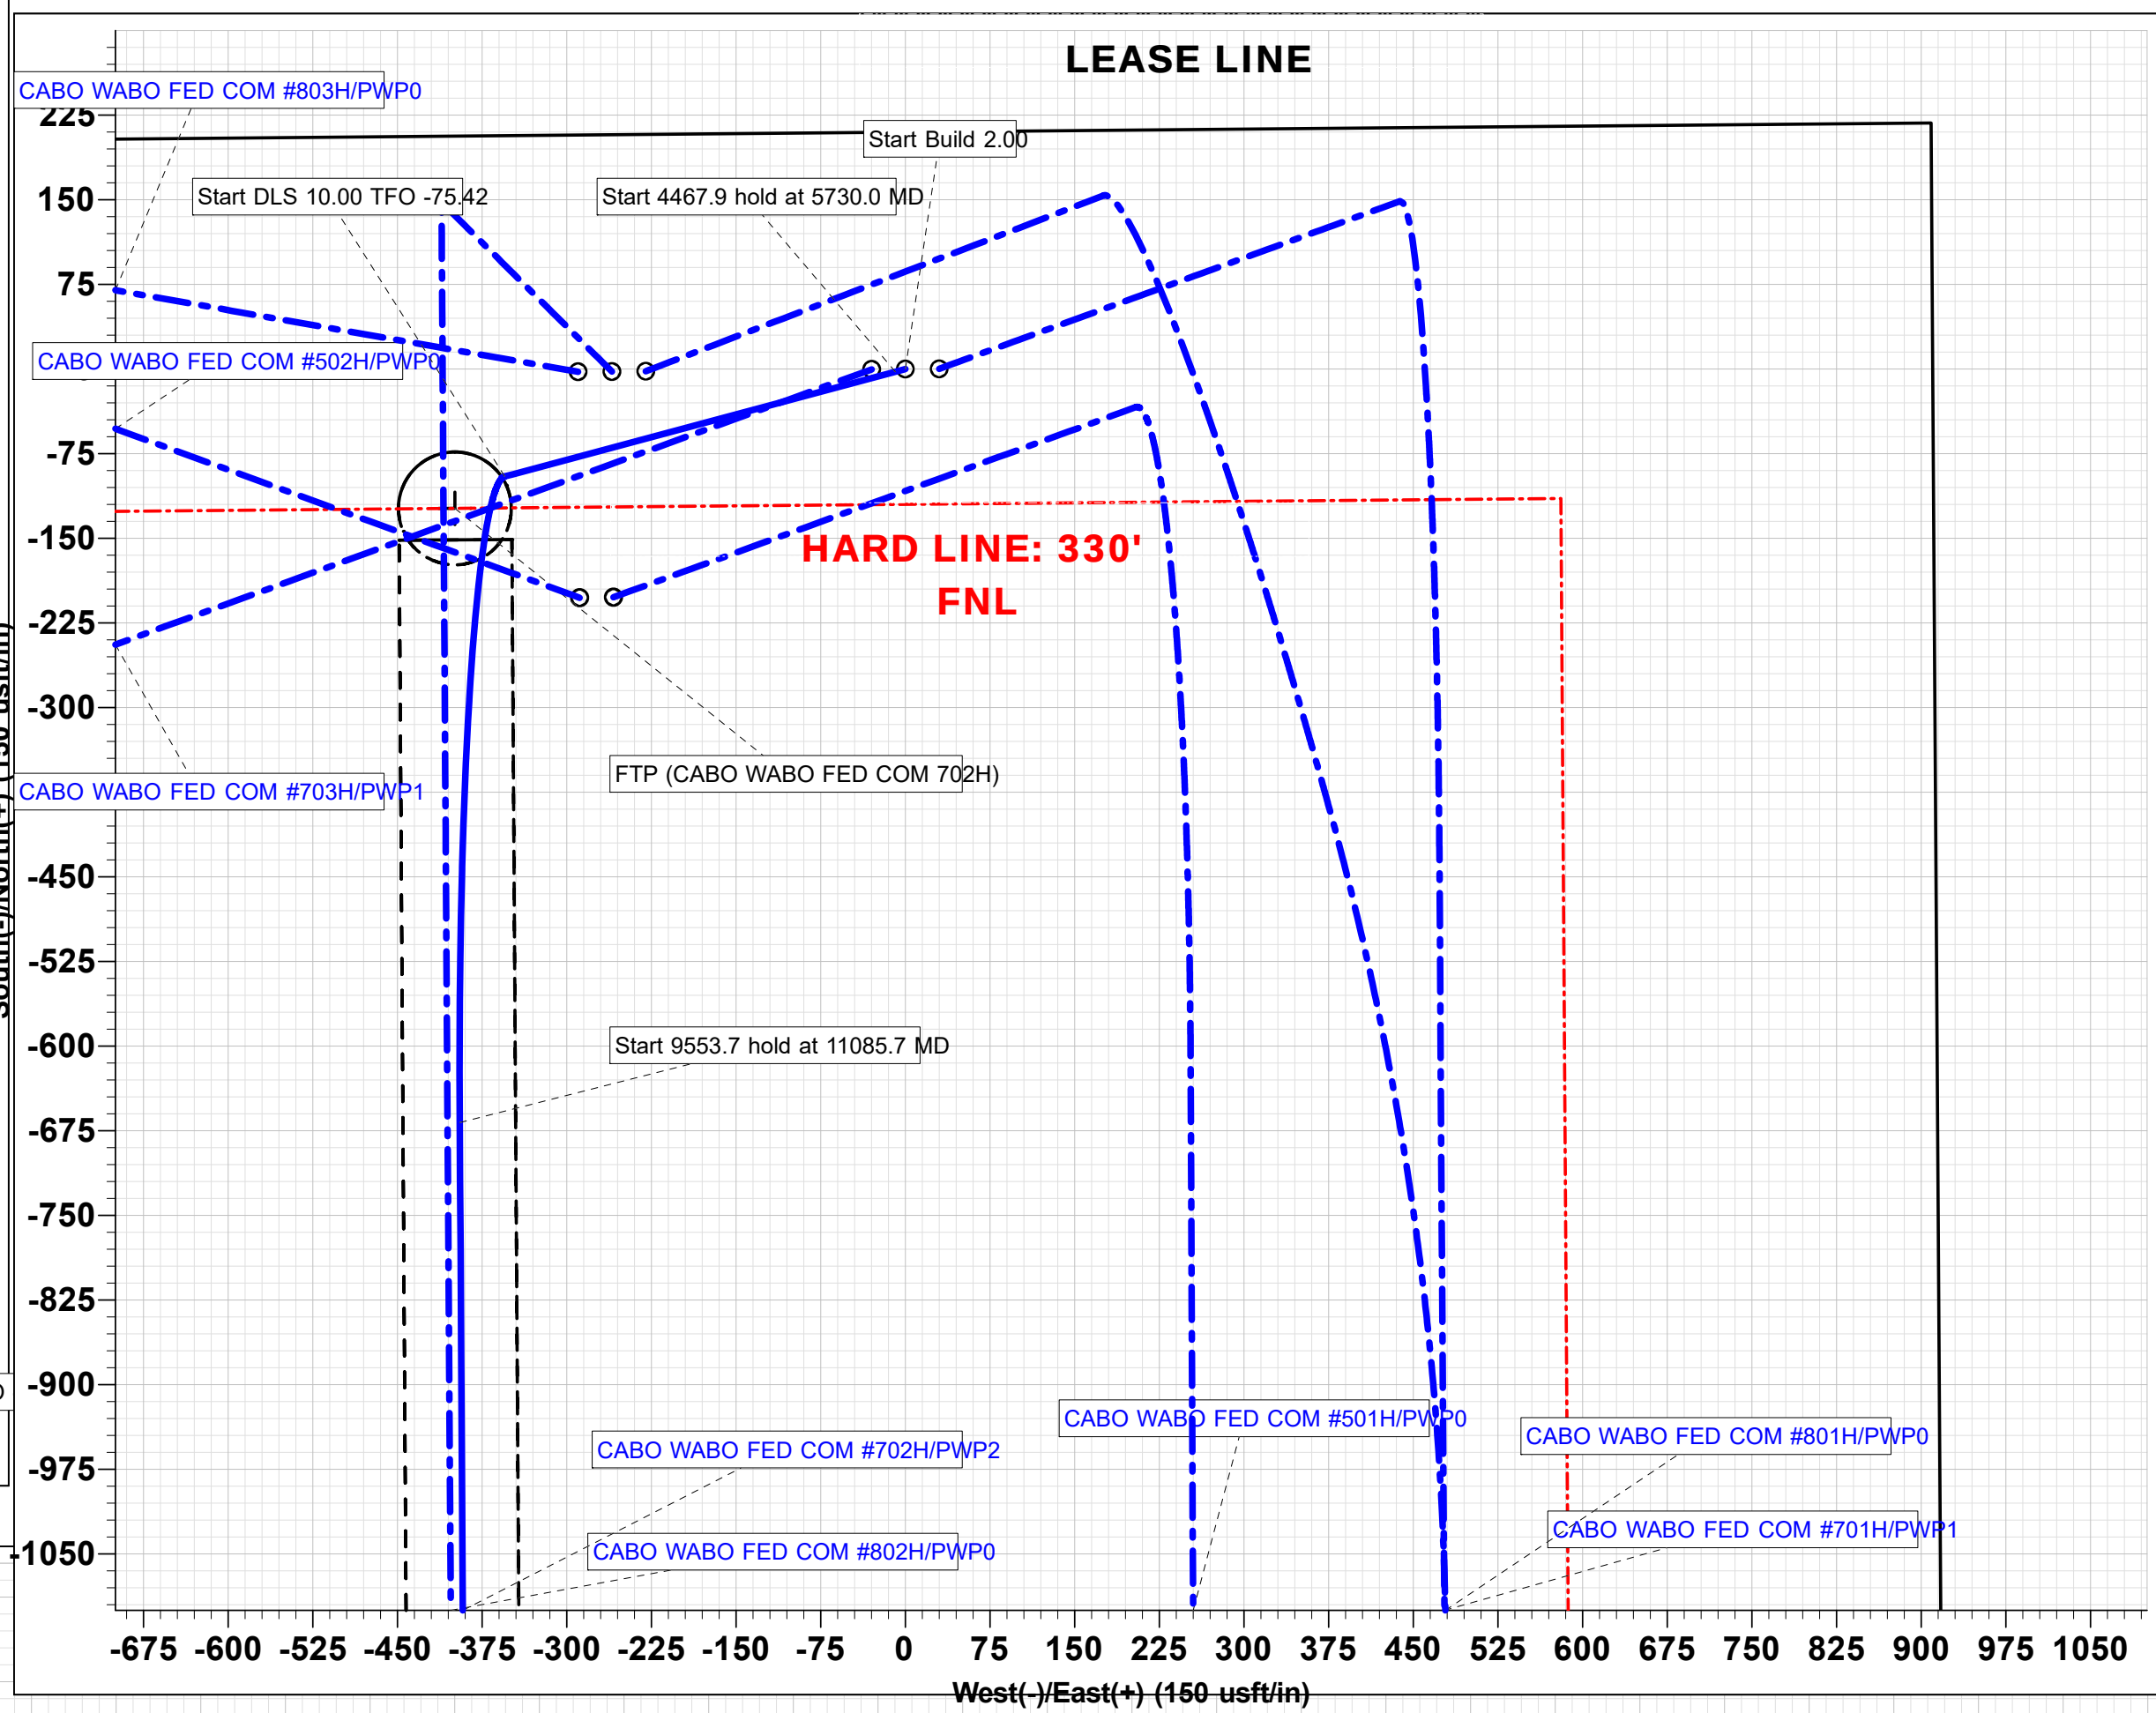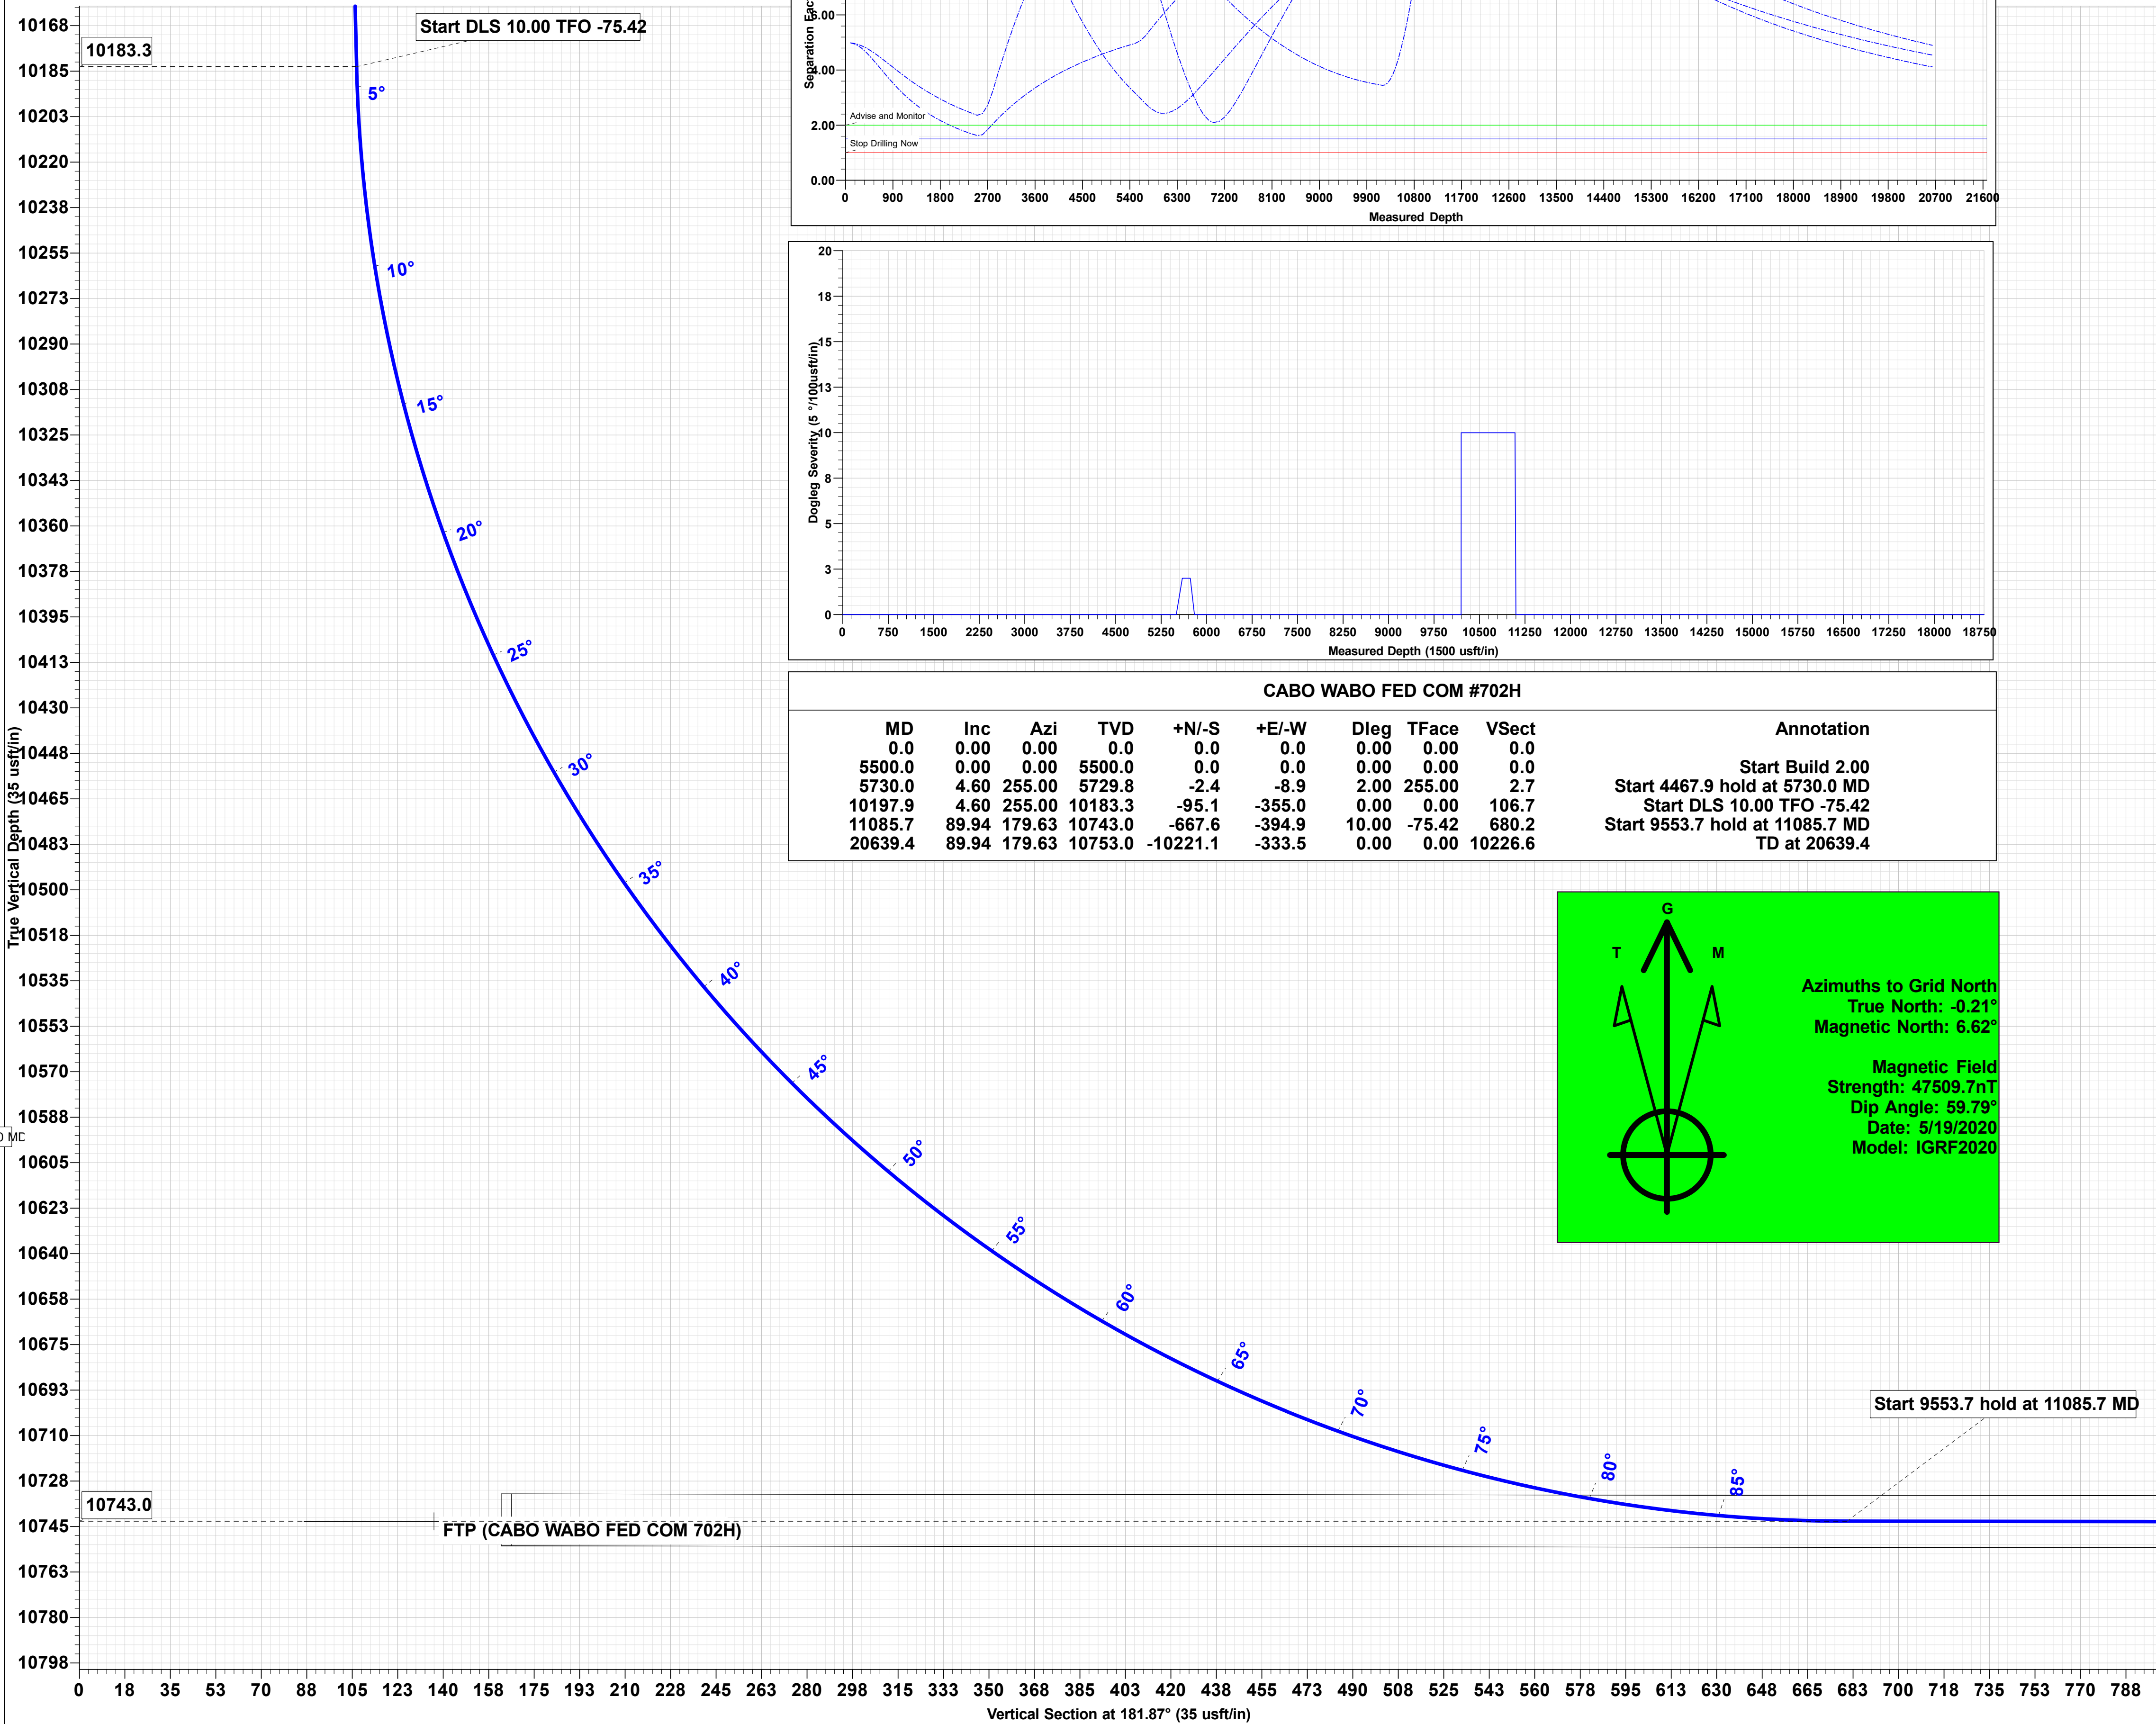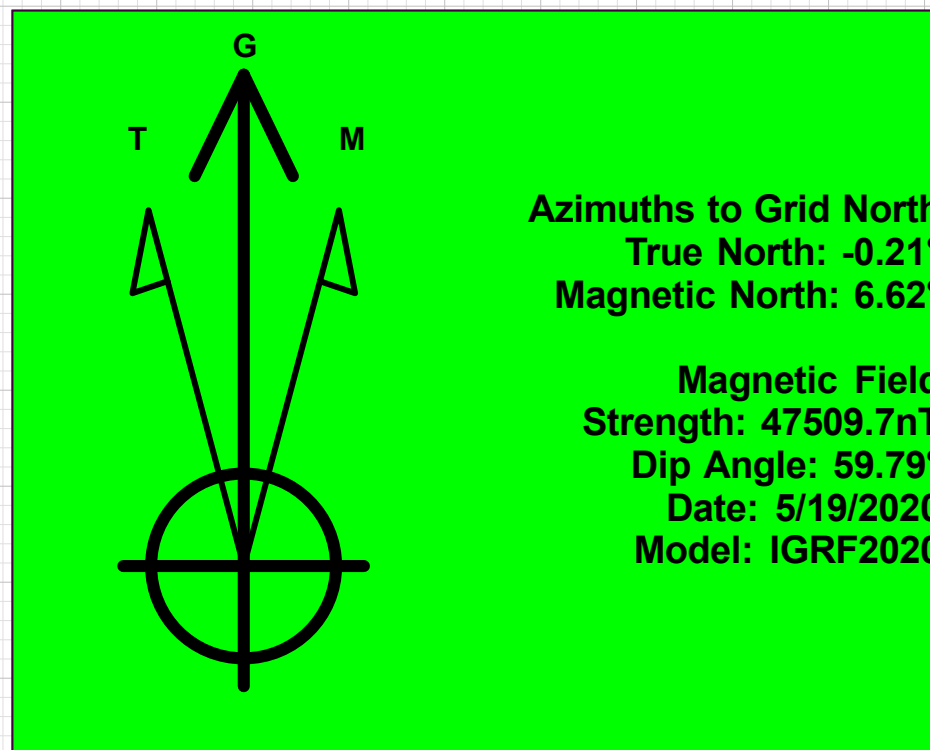

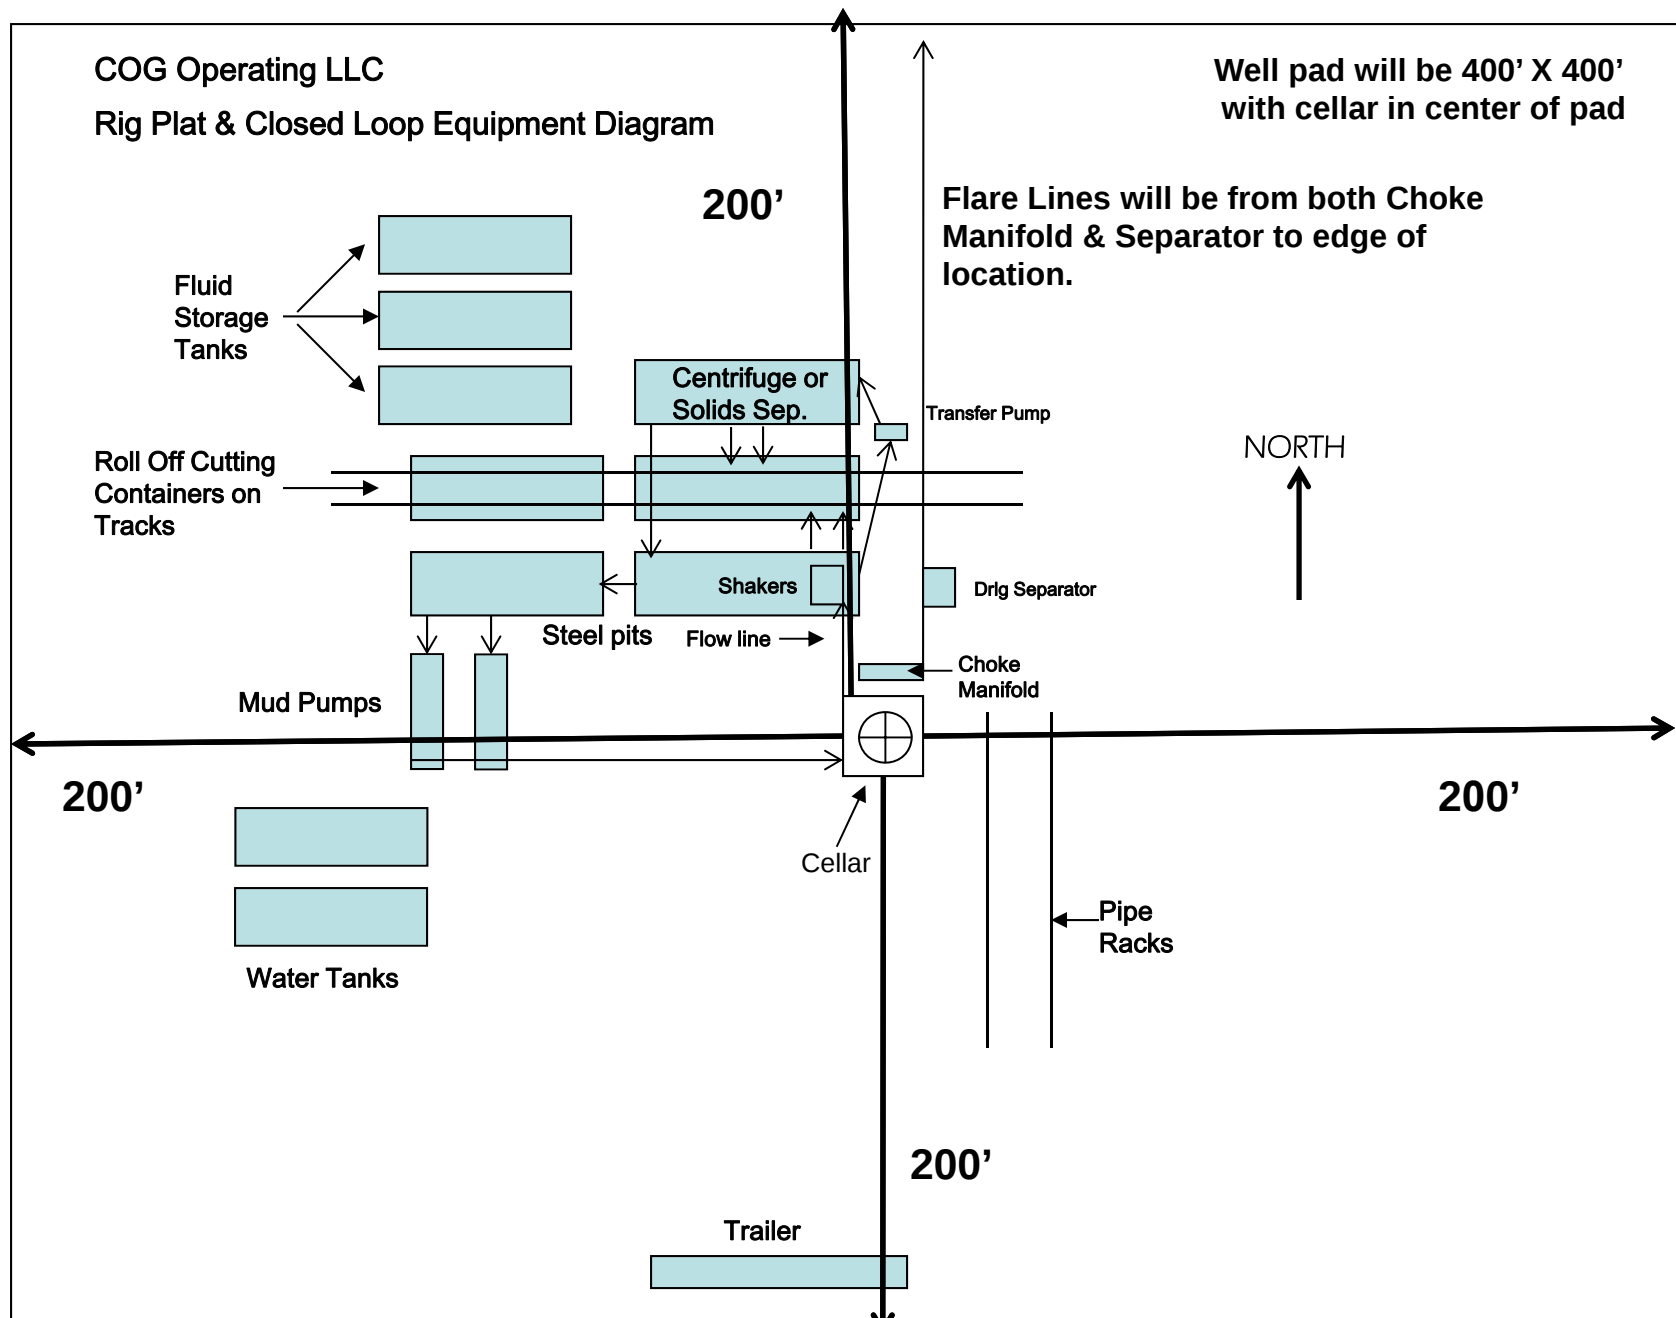


Exhibit 1

"I further certify that COG will comply with Rule 19.15.17 NMAC by using a Closed Loop System."

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit Original
to Appropriate
District Office

GAS CAPTURE PLAN

Date: 5/28/20

☒ Original

Operator & OGRID No.: COG Production LLC, (217955)

☐ Amended - Reason for Amendment:

This Gas Capture Plan outlines actions to be taken by the Operator to reduce well/production facility flaring/venting for new completion (new drill, recomple to new zone, re-frac) activity.

Note: Form C-129 must be submitted and approved prior to exceeding 60 days allowed by Rule (Subsection A of 19.15.18.12 NMAC).

Well(s)/Production Facility – Name of facility

The well(s) that will be located at the production facility are shown in the table below.

Well Name	API	Well Location (ULSTR)	Footages	Expected MCF/D	Flared or Vented	Comments
Cabo Wabo Federal Com 701H	30-015-	A-24-25S-29E	210' FNL & 880' FEL	±4200	None Planned	APD Submission Plan Subject to change
Cabo Wabo Federal Com 702H	30-015-	A-24-25S-29E	210' FNL & 910' FEL	±4200	None Planned	APD Submission Plan Subject to change
Cabo Wabo Federal Com 703H	30-015-	A-24-25S-29E	210' FNL & 940' FEL	±4200	None Planned	APD Submission Plan Subject to change
Cabo Wabo Federal Com 704H	30-015-	C-24-25S-29E	210' FNL & 1730' FWL	±4200	None Planned	APD Submission Plan Subject to change
Cabo Wabo Federal Com 705H	30-015-	C-24-25S-29E	210' FNL & 1700' FWL	±4200	None Planned	APD Submission Plan Subject to change
Cabo Wabo Federal Com 706H	30-015-	C-24-25S-29E	210' FNL & 1670' FWL	±4200	None Planned	APD Submission Plan Subject to change

Gathering System and Pipeline Notification

Well(s) will be connected to a production facility after flowback operations are complete, if gas transporter system is in place. The gas produced from production facility is dedicated to **ETC Field Services LLC** and will be connected to **Red Bluff** low pressure gathering system located in **Culberson** County, Texas. **COG Operating LLC** provides (periodically) to **ETC Field Services LLC** a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, **COG Operating LLC** and **ETC Field Services LLC** have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at **ETC Field Services LLC** Processing Plant located in Sec. 35, Blk. 57, T2, **Culberson** County, Texas. The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

Flowback Strategy

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on Gas Transporter system at that time. Based on current information, it is Operator's belief the system can take this gas upon completion of the well(s).

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

Alternatives to Reduce Flaring

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation – On lease
 - Only a portion of gas is consumed operating the generator, remainder of gas will be flared
- Compressed Natural Gas – On lease
 - Gas flared would be minimal, but might be uneconomical to operate when gas volume declines

- NGL Removal – On lease
 - Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines