

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

OCD Artesia


FORM APPROVED
OMB No 1004-0137
Expires March 31, 2007

1a Type of work. <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5 Lease Serial No. SH:LC-028731B BH:NM-125007
1b Type of Well. <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6 If Indian, Allottee or Tribe Name N/A
2 Name of Operator COG Operating LLC		7 If Unit or CA Agreement, Name and No NMNM-111789X; Dodd Federal Unit
3a Address 550 W. Texas Ave., Suite 100 Midland, TX 79701	3b Phone No. (include area code) 432-685-4384	8 Lease Name and Well No DODD FEDERAL UNIT #113H
4 Location of Well (Report location clearly and in accordance with any State requirements *) At surface SHL: 1775' FNL & 85' FWL, Unit E At proposed prod zone BHL: 1775' FNL & 330' FEL, Unit H		9 API Well No 30-015- 40625
14 Distance in miles and direction from nearest town or post office* 2 miles from Loco Hills, NM		10 Field and Pool, or Exploratory Dodd; Glorieta-Upper Yesso
15 Distance from proposed* location to nearest property or lease line, ft (Also to nearest drig unit line, if any) 85'		11 Sec., T. R. M or Blk. and Survey or Area Sec 11 T17S R29E
16 No. of acres in lease SHL: 1480 BHL: 160		12 County or Parish EDDY
17 Spacing Unit dedicated to this well 160		13 State NM
18 Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft 170'	19 Proposed Depth TVD: 4800' MD: 9469'	20 BLM/BIA Bond No. on file NMB000740; NMB000215
21 Elevations (Show whether DF, KDB, RT, GL, etc.) 3627' GL	22 Approximate date work will start* 06/30/2012	23 Estimated duration 15 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No 1, shall be attached to this form

- | | |
|--|--|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office) | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25 Signature 	Name (Printed/Typed) Kelly J. Holly	Date 04/04/2012
---	---	---------------------------

Title
Permitting Tech

Approved by (Signature) /s/ Don Peterson	Name (Printed/Typed)	Date JUL 26 2012
--	----------------------	----------------------------

Title
FIELD MANAGER

Office
CARLSBAD FIELD OFFICE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.


Conditions of approval, if any, are attached

APPROVAL FOR TWO YEARS

Title 18 USC Section 1001 and Title 43 USC Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

*(Instructions on page 2)

Roswell Controlled Water Basin

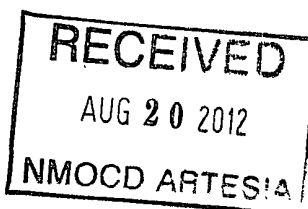

**SEE ATTACHED FOR
CONDITIONS OF APPROVAL**

**Approval Subject to General Requirements
& Special Stipulations Attached**

Surface Use Plan
COG Operating, LLC
Dodd 11 Federal Unit #3H
SL: 1775' FNL & 85' FWL UL E
BHL: 1775' FNL & 330' FEL UL H
Section 11, T-17-S, R-29-E
Eddy County, New Mexico

I hereby certify that I, or persons under my direct supervision, have inspected the drill site and access road proposed herein; that I am familiar with the conditions that presently exist; that I have full knowledge of State and Federal laws applicable to this operation; that the statements make in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or COG Operating, LLC, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements. Executed this 15th day of December, 2011.

Signed: _____



Printed Name: Carl Bird

Position: Drilling Engineer

Address: 550 W. Texas, Suite 1300, Midland, Texas 79701

Telephone: (432) 683-7443

Field Representative (if not above signatory): Same

E-mail: cbird@conchoresources.com

DISTRICT I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
DISTRICT II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
DISTRICT III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-015- 40625	Pool Code 97917	Pool Name Dodd; Gloritea-Upper Yeso
Property Code 308195	Property Name DODD FEDERAL UNIT	Well Number 91011-13H
OGRID No. 229137	Operator Name COG OPERATING, LLC	Elevation 3627'

Surface Location

UL or lot No	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
E	11	17-S	29-E		1775	NORTH	85	WEST	EDDY

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
H	11	17-S	29-E		1775	NORTH	330	EAST	EDDY

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
160			9469 7/26

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

<p>CORNER COORDINATES TABLE</p> <p>① - Y=674009.3 N, X=585916.2 E ② - Y=674002.2 N, X=591205.2 E ③ - Y=672688.7 N, X=585919.9 E ④ - Y=672682.1 N, X=591209.9 E</p> <p>GEODETIC COORDINATES NAD 27 NME</p> <p>SURFACE LOCATION Y=673555.1 N X=586002.5 E LAT.=32.851374° N LONG.=104.053283° W</p> <p>BOTTOM HOLE LOCATION Y=673547.9 N X=590876.9 E</p>	<p>OPERATOR CERTIFICATION</p> <p>I hereby certify that the information herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division</p> <p>6/26/2012 <i>Robyn M. Odom</i> Signature Date Printed Name Rodom@concho.com E-mail Address</p> <p>SURVEYOR CERTIFICATION</p> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief</p> <p>DECEMBER 3, 2011</p> <p>Date of Survey Signature & Seal of Professional Surveyor. Certificate Number Gary C. Eidson 12641 Ronald J. Eidson 3239 ACR/DSR RUN 12/11/2012 FWSC W.O. 12 13 1064</p>
--	---

ATTACHMENT TO FORM 3160-3
COG Operating, LLC
DODD FEDERAL UNIT 11 #3H
SHL: 1775' FNL & 85' FWL, Unit E
BHL: 1775' FNL & 330' FEL, Unit H
Sec 11, T17S, R29E
Eddy County, NM

1. Proration Unit Spacing: 160 Acres
2. Ground Elevation: 3627'
3. Proposed Depths: Horizontal TVD = 4800', MD = 9469'
4. Estimated tops of geological markers:

Quaternary	Surface
Rustler	300'
Top of Salt	450'
Base of Salt	800'
Yates	958'
Seven Rivers	1232'
Queen	1824'
Grayburg	2236'
San Andres	2530'
Glorieta	3948'
Paddock	4008'
Blinebry	4410'
Tubb	5355'

5. Possible mineral bearing formations:

Water Sand	150'	Fresh Water
Grayburg	2236'	Oil/Gas
San Andres	2530'	Oil/Gas
Glorieta	3948'	Oil/Gas
Paddock	4008'	Oil/Gas
Blinebry	4410'	Oil/Gas
Tubb	5355'	Oil/Gas

No other formations are expected to give up oil, gas or fresh water in measurable quantities. Setting 13 3/8" casing to 400' and circulating cement back to the surface will protect the surface fresh water sand. The Salt Section will be protected by setting 9 5/8" casing to 1350' and circulating cement, in a single or multi-stage job and/or with an ECP, back to the surface. Any shallower zones above TD, which contain commercial quantities of oil and/or gas, will have cement circulated across them. This will be achieved by cementing, with a single or multi-stage job, the 7" x 5 1/2" production casing back 200' into the intermediate casing (although cement volume is actually calculated to surface), to be run at TD. If wellbore conditions arise that require immediate action and/or a change to this program, COG Operating LLC personnel will always react to protect the wellbore and/or environment.

see
COA

see
COA

ATTACHMENT TO FORM 3160-3
COG Operating, LLC
DODD FEDERAL UNIT 11 #3H
Page 2 of 4

6. Casing Program - Proposed

Hole size	Interval	OD of Casing	Weight	Cond.	Collar	Grade
<i>See COA</i> 17-1/2"	0' - +/- 400' ²¹⁵	13-3/8"	48#	New	STC	H-40 or Hybrid J-55
Collapse sf - 4.36, Burst sf - 9.79, Tension sf - 16.77						
12-1/4"	0' - +/- 1350'	9-5/8"	36#	New	STC	J/K-55
Collapse sf - 3.16, Burst sf - 5.51, Tension sf - 9.32						
8-3/4" x 7 7/8"	0' - 9469'	7" x 5-1/2"	26#/17#	New	LTC	L-80
7" Csg - Collapse sf - 2.64, Burst sf - 2.04, Tension sf - 4.62						
5 1/2" Csg - Collapse sf - 2.76, Burst sf - 2.05, Tension sf - 4.26						

Production string will be a tapered string with 7" 26# L-80 LTC ran from surface to kick off point and then crossed over to 5 1/2" 17# L-80 LTC.

7. Cement Program *See COA*

13 3/8" Surface Csg: Set at +/- 400' MD: 400 sx Class "C" w/ 2% CaCl₂ & 0.25 pps CF, yield 1.32 cu.ft./sk., wt. 14.8 ppg. 190% excess, calculated to surface.

9 5/8" Intrmd. Csg: Set at +/- 1350' MD.

Option #1: **Single Stage (TD to Surface):** Lead Slurry: 300 sx 50:50:10:C:Poz:Gel w/ 5% salt, 5 pps LCM-1, 0.25 pps CF, yield 2.45 cu.ft./sk., wt. 11.8 ppg. Tail Slurry: 200 sx Class "C" w/ 2% CaCl₂, yield 1.32 cu.ft./sk., wt. 14.8 ppg. 185% excess, calculated to surface.

Option #2: **Multi Stage: Stage 1 (TD to DV Tool @ 450'):** 200 sx Class "C" w/ 2% CaCl₂, yield 1.32 cu.ft./sk., wt. 14.8 ppg. 45% excess. **Stage 2 (DV Tool to surface):** 300 sx 50:50:10:C:Poz:Gel w/ 5% salt, 5 pps LCM-1, 0.25 pps CF, yield 2.45 cu.ft./sk., wt. 11.8 ppg calculated to surface, 185% excess; assumption for tool is lost circulation. Multi stage tool to be set at approximately, depending on hole conditions, 450' (50' below the surface casing). Cement volumes will be adjusted proportionately for depth changes of multi stage tool.

7" x 5 1/2" Production Csg: Set at +/- 9469' MD

Option #1: **Single Stage (KOP to surface):** Lead Slurry: 400 sx 35:65:6:C:Poz:Gel w/ 5% salt, 5 pps LCM, 0.2% SMS, 0.3% FL-52A, 0.125 pps CF, yield 2.01 cu.ft./sk., wt. 12.5 ppg. Tail Slurry: 300 sx 50:50:2:C:Poz:Gel w/ 5% salt, 3 pps LCM, 0.6% SMS, 1% FL-25, 1% BA-58, 0.125 pps CF, 0.3% FL-52A; yield 1.37 cu.ft./sk., 14.0 ppg. DV Tool and ECP to be set at kick off point with 7" cemented to surface and 5 1/2" run with +/- 18 isolation packers and sliding sleeves in uncemented lateral. 122% excess in open hole, from kick off point, calculated to surface. **This is a minimum volume and will be adjusted up after caliper is run.**

Option #2: **Multi Stage (DV Tool & ECP (external csg. packer) @ KOP and DV Tool at 3000'):** **Stage 1:** (KOP to DV Tool at 3000'): 200 sx 50:50:2:C:Poz:Gel w/ 5% salt, 3 pps LCM, 0.6% SMS, 1% FL-25, 1% BA-58, 0.125 pps CF, 0.3% FL-52A; yield 1.37 cu.ft./sk., 14.00 ppg 38% excess. **This is a minimum volume and will be adjusted up after caliper is run.** **Stage 2:** (DV Tool to surface) **Lead Slurry:** 400 sx 50:50:2:C:Poz:Gel w/ 5% salt, 3 pps LCM, 0.6% SMS, 1% FL-25, 1% BA-58, 0.125 pps CF, 0.3% FL-52A; yield 1.37 cu.ft./sk., wt. 14.0 ppg. **Tail Slurry:** 300 sx Class C w/ 0.3% R-3 + 1.5% CD-32, yield 1.02 cu.ft./sk., wt. 16.8 ppg. 154% excess calculated back to surface (no need for excess in casing overlap). **This is a minimum volume and will be adjusted up after caliper is run.**

ATTACHMENT TO FORM 3160-3
COG Operating, LLC
DODD FEDERAL UNIT 11 #3H
Page 3 of 4

8. Pressure Control Equipment:


The blowout preventer equipment (BOP) shown in Exhibit #9 will consist of a double ram-type (2000 psi WP) preventer, and in some cases possibly a 2000 psi Hydril type annular preventer as provided for in Onshore Order #2. This unit will be hydraulically operated and the ram type preventer will be equipped with blind rams on top of 4 1/2" drill pipe rams on the bottom. A 13-5/8" BOP will be used during the drilling of the well. A 13 5/8" permanent casing head will be installed on the 13 3/8" casing. The BOP will be nipped up on the 13 5/8" permanent casing head and tested to 2000 psi. After setting 9-5/8", permanent "B section" well head will be installed and the BOP will then be nipped up on the permanent B section well head and tested by a third party to 2000 psi and used continuously until total depth is reached. Pipe rams will be operationally checked each 24-hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment (Exhibit #10) will include a Kelly cock and floor safety valve, choke lines and a choke manifold (Exhibit #11) with a 2000 psi WP rating.

9. Proposed Mud Circulating System

Interval	Mud Wt.	Visc.	FL	Type Mud System
0' - 400' ²¹⁵	8.5	28	NC	Fresh water native mud w/ paper for seepage and sweeps. Lime for PH.
400' - 1350'	10	30	NC	Brine mud, lime for PH and paper for seepage and sweeps.
1350' - 9469'	9.1	29	NC	Drill section with fresh water/cut brine circulating the reserve utilizing periodic sweeps of paper as needed for seepage control and solids removal.

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the well site at all times.

10. Production Hole Drilling Summary:



Drill 8 3/4" hole and kick off at +/- 4823', building curve over +/- 750' to horizontal at 4800' TVD. Drill 7 7/8" lateral section in a easterly direction for +/-4397' lateral to TD at +/-9469' MD, 4800' TVD. Run 7" x 5-1/2" production casing. 7" to be ran from surface to kickoff point and changed over to 5 1/2" with DV Tool and ECP at kickoff point. 5 1/2" casing will be ran from kickoff point to td and isolation packers set throughout lateral. 7" to be cemented from kickoff point to surface.

11. Auxiliary Well Control and Monitoring Equipment

- A. Kelly cock will be kept in the drill string at all times.
- B. A full opening drill pipe-stabbing valve with proper drill pipe connections will be on the rig floor at all times.

ATTACHMENT TO FORM 3160-3
COG Operating, LLC
DODD FEDERAL UNIT 11 #3H
Page 4 of 4

12. Logging, Testing and Coring Program: *See CWA*

- A. No electric logs to be run.
- B. The mud logging program will consist of lagged 10' samples from intermediate casing point to T.D. in vertical pilot hole and from Kick off point to TD in Horizontal hole.
- C. Drill Stem test is not anticipated.
- D. No conventional coring is anticipated.
- E. Further testing procedures will be determined after the 7" x 5 1/2" production casing has been cemented at TD based on drill shows and log evaluation.

13. Abnormal Conditions, Pressures, Temperatures and Potential Hazards:

No abnormal pressures or temperatures are anticipated. The estimated bottom hole temperature at TD of pilot hole is 90 degrees and estimated maximum bottom hole pressure is 1800 psig. Measurable gas volumes or Hydrogen Sulfide levels have not been encountered during drilling operations in this area, however an H2S plan is attached to the Drilling Program. No major loss of circulation zones has been reported in offsetting wells.

14. Anticipated Starting Date

Drilling operations will commence approximately on June 30, 2012 with drilling and completion operations lasting approximately 90 days.



COG Operating LLC

Eddy County, NM (NAN27 NME)

Dodd Federal Unit 11 #3H

Dodd Federal Unit 11 #3H

OH

Plan: Plan #1 - 8-3/4" Hole

SHL = 1775' FNL & 85' FWL

PP = 1775' FNL & 330' FWL

BHL = 1775' FNL & 330' FEL

Standard Planning Report

30 January, 2012



Scientific Drilling
Directional Drilling Operations



SDI
Planning Report



Database:	EDM 5000 1 Single User Db	Local Co-ordinate Reference:	Site Dodd Federal Unit 11 #3H
Company:	COG Operating LLC	TVD Reference:	GL @ 3627 00usft
Project:	Eddy County, NM (NAN27.NME)	MD Reference:	GL @ 3627 00usft
Site:	Dodd Federal Unit 11 #3H	North Reference:	Grid
Well:	Dodd Federal Unit 11 #3H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1 - 8-3/4" Hole		

Project	Eddy County, NM (NAN27.NME)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	Dodd Federal Unit 11 #3H		
Site Position:		Northing:	673,555 10 usft
From:	Map	Easting:	586,002 50 usft
Position Uncertainty:	0 00 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 51' 4 946 N
		Longitude:	104° 3' 11 819 W
		Grid Convergence:	0.15 °

Well	Dodd Federal Unit 11 #3H		
Well Position	+N/-S	0 00 usft	Northing:
	+E/-W	0 00 usft	Easting:
Position Uncertainty	0 00 usft	Wellhead Elevation:	Ground Level:
			3,627.00 usft

Wellbore	OH		
Magnetics	Model Name	Sample Date	Declination
			(°)
	IGRF2010	2012/01/30	7 78
			Dip Angle
			(°)
			Field Strength
			(nT)
			60 67
			48,876

Design	Plan #1 - 8-3/4" Hole		
Audit Notes:			
Version:	Phase:	PLAN	Tie On Depth:
			0 00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(usft)	(usft)	(usft)
	0 00	0 00	0.00
			90 08

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0 00	0.00	0 00	0.00	0 00	0 00	0 00	0 00	0 00	
4,322 54	0.00	0.00	4,322 54	0 00	0.00	0 00	0 00	0.00	0 00	
5,072 54	90 00	90 08	4,800.00	-0 71	477 46	12.00	12 00	0 00	90 08	
9,469 48	90 00	90 08	4,800.00	-7 20	4,874 40	0 00	0 00	0 00	0 00	PBHL-Dodd Fed 11 #



Database:	EDM 5000 1 Single User Db	Local Co-ordinate Reference:	Site Dodd Federal Unit 11 #3H
Company:	COG Operating LLC	TVD Reference:	GL @ 3627 00usft
Project:	Eddy County, NM (NAN27 NME)	MD Reference:	GL @ 3627 00usft
Site:	Dodd Federal Unit 11 #3H	North Reference:	Grid
Well:	Dodd Federal Unit 11 #3H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1 - 8-3/4" Hole		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
4,322 54	0 00	0 00	4,322 54	0 00	0 00	0 00	0 00	0 00	0 00
KOP Start Build 12.00°/100'									
4,400 00	9 30	90 08	4,399 66	-0 01	6 27	6 27	12 00	12 00	0 00
4,500 00	21 30	90 08	4,495 94	-0 05	32 60	32 60	12 00	12 00	0 00
4,600 00	33 30	90 08	4,584 64	-0 12	78 38	78 38	12 00	12 00	0 00
4,700 00	45 30	90 08	4,661 89	-0 21	141 59	141 59	12 00	12 00	0 00
4,800 00	57 30	90 08	4,724 31	-0 32	219 49	219 49	12 00	12 00	0 00
4,829 71	60 86	90 08	4,739 57	-0 36	244 97	244 97	12 00	12 00	0 00
PP-330° FWL Dodd Fed 11 #3H									
4,900 00	69 30	90 08	4,769 16	-0 46	308 66	308 66	12 00	12 00	0 00
5,000 00	81 30	90 08	4,794 50	-0 60	405 21	405 21	12 00	12 00	0 00
5,072 54	90 00	90 08	4,800 00	-0 71	477 46	477 46	12 00	12 00	0 00
Land hold 90.00°									
5,100 00	90 00	90 08	4,800 00	-0 75	504 93	504 93	0 00	0 00	0 00
5,200 00	90 00	90 08	4,800 00	-0 89	604 93	604 93	0 00	0 00	0 00
5,300 00	90 00	90 08	4,800 00	-1 04	704 93	704 93	0 00	0 00	0 00
5,400 00	90 00	90 08	4,800 00	-1 19	804 93	804 93	0 00	0 00	0 00
5,500 00	90 00	90 08	4,800 00	-1 34	904 93	904 93	0 00	0 00	0 00
5,600 00	90 00	90 08	4,800 00	-1 48	1,004 93	1,004 93	0 00	0 00	0 00
5,700 00	90 00	90 08	4,800 00	-1 63	1,104 93	1,104 93	0 00	0 00	0 00
5,800 00	90 00	90 08	4,800 00	-1 78	1,204 93	1,204 93	0 00	0 00	0 00
5,900 00	90 00	90 08	4,800 00	-1 93	1,304 93	1,304 93	0 00	0 00	0 00
6,000 00	90 00	90 08	4,800 00	-2 08	1,404 93	1,404 93	0 00	0 00	0 00
6,100 00	90 00	90 08	4,800 00	-2 22	1,504 93	1,504 93	0 00	0 00	0 00
6,200 00	90 00	90 08	4,800 00	-2 37	1,604 93	1,604 93	0 00	0 00	0 00
6,300 00	90 00	90 08	4,800 00	-2 52	1,704 93	1,704 93	0 00	0 00	0 00
6,400 00	90 00	90 08	4,800 00	-2 67	1,804 93	1,804 93	0 00	0 00	0 00
6,500 00	90 00	90 08	4,800 00	-2 81	1,904 93	1,904 93	0 00	0 00	0 00
6,600 00	90 00	90 08	4,800 00	-2 96	2,004 93	2,004 93	0 00	0 00	0 00
6,700 00	90 00	90 08	4,800 00	-3 11	2,104 93	2,104 93	0 00	0 00	0 00
6,800 00	90 00	90 08	4,800 00	-3 26	2,204 93	2,204 93	0 00	0 00	0 00
6,900 00	90 00	90 08	4,800 00	-3 40	2,304 93	2,304 93	0 00	0 00	0 00
7,000 00	90 00	90 08	4,800 00	-3 55	2,404 93	2,404 93	0 00	0 00	0 00
7,100 00	90 00	90 08	4,800 00	-3 70	2,504 93	2,504 93	0 00	0 00	0 00
7,200 00	90 00	90 08	4,800 00	-3 85	2,604 93	2,604 93	0 00	0 00	0 00
7,300 00	90 00	90 08	4,800 00	-4 00	2,704 93	2,704 93	0 00	0 00	0 00
7,400 00	90 00	90 08	4,800 00	-4 14	2,804 93	2,804 93	0 00	0 00	0 00
7,500 00	90 00	90 08	4,800 00	-4 29	2,904 93	2,904 93	0 00	0 00	0 00
7,600 00	90 00	90 08	4,800 00	-4 44	3,004 93	3,004 93	0 00	0 00	0 00
7,700 00	90 00	90 08	4,800 00	-4 59	3,104 93	3,104 93	0 00	0 00	0 00
7,800 00	90 00	90 08	4,800 00	-4 73	3,204 93	3,204 93	0 00	0 00	0 00
7,900 00	90 00	90 08	4,800 00	-4 88	3,304 93	3,304 93	0 00	0 00	0 00
8,000 00	90 00	90 08	4,800 00	-5 03	3,404 93	3,404 93	0 00	0 00	0 00
8,100 00	90 00	90 08	4,800 00	-5 18	3,504 93	3,504 93	0 00	0 00	0 00
8,200 00	90 00	90 08	4,800 00	-5 32	3,604 93	3,604 93	0 00	0 00	0 00
8,300 00	90 00	90 08	4,800 00	-5 47	3,704 93	3,704 93	0 00	0 00	0 00
8,400 00	90 00	90 08	4,800 00	-5 62	3,804 93	3,804 93	0 00	0 00	0 00
8,500 00	90 00	90 08	4,800 00	-5 77	3,904 93	3,904 93	0 00	0 00	0 00
8,600 00	90 00	90 08	4,800 00	-5 92	4,004 93	4,004 93	0 00	0 00	0 00
8,700 00	90 00	90 08	4,800 00	-6 06	4,104 93	4,104 93	0 00	0 00	0 00
8,800 00	90 00	90 08	4,800 00	-6 21	4,204 93	4,204 93	0 00	0 00	0 00
8,900 00	90 00	90 08	4,800 00	-6 36	4,304 93	4,304 93	0 00	0 00	0 00



SDI
Planning Report



Database:	EDM 5000 1 Single User Db	Local Co-ordinate Reference:	Site Dodd Federal Unit 11 #3H
Company:	COG Operating LLC	TVD Reference:	GL @ 3627 00usft
Project:	Eddy County, NM (NAN27 NME)	MD Reference:	GL @ 3627.00usft
Site:	Dodd Federal Unit 11 #3H	North Reference:	Grid
Well:	Dodd Federal Unit 11 #3H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1 - 8-3/4" Hole		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,000.00	90.00	90.08	4,800.00	-6.51	4,404.92	4,404.93	0.00	0.00	0.00
9,100.00	90.00	90.08	4,800.00	-6.65	4,504.92	4,504.93	0.00	0.00	0.00
9,200.00	90.00	90.08	4,800.00	-6.80	4,604.92	4,604.93	0.00	0.00	0.00
9,300.00	90.00	90.08	4,800.00	-6.95	4,704.92	4,704.93	0.00	0.00	0.00
9,400.00	90.00	90.08	4,800.00	-7.10	4,804.92	4,804.93	0.00	0.00	0.00
9,469.48	90.00	90.08	4,800.00	-7.20	4,874.40	4,874.41	0.00	0.00	0.00
PBHL-Dodd Fed 11 #3H									

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
PP-330' FWL Dodd Fed	0.00	0.00	4,739.59	-0.36	245.00	673,554.73	586,247.50	32° 51' 4.936 N	104° 3' 8.947 W
- plan hits target center									
- Point									
PBHL-Dodd Fed 11 #3H	0.00	0.01	4,800.00	-7.20	4,874.40	673,547.90	590,876.90	32° 51' 4.743 N	104° 2' 14.679 W
- plan hits target center									
- Point									

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Comment
4,322.54	4,322.54	0.00	0.00	KOP Start Build 12.00°/100'
5,072.54	4,800.00	-0.71	477.46	Land hold 90.00°



Dodd Federal Unit 11 #3H
Eddy County, NM (NAN27 NME)
Northing (Y) 673555.10
Easting (X) 586002.50
Plan #1 - 8-3/4" Hole



Azimuth to Grid North
True North -0 15°
Magnetic North 7 63°
Magnetic Field
Strength 48876 Gauss
Dip Angle 60 67°
Date 2012/01/20
To convert a Magnetic Direction to a Grid Direction Add 7 63°
To convert a True Direction to a Grid Direction Subtract 0 15° Model IGRF2010

WELL DETAILS

Dodd Federal Unit 11 #3H

	+N/S	+E/W	North	Ground Level	3527 00	Latitude	Longitude	Slut
	0 00	0 00	673555 10	586002 50		32° 51' 4 945 N	104° 3' 11 819 W	

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/S	+E/W	Dleg	TFace	V/Sect	Target
1	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	
2	4321 54	0 00	0 00	4322 54	0 00	0 00	0 00	0 00	0 00	
3	5072 54	90 08	90 08	4800 00	-0 71	477 46	12 00	90 08	477 46	
4	9469 48	90 00	90 00	4800 00	-7 20	4874 40	0 00	0 00	4874 41	PBHL-Dodd Fed 11 #3H

DESIGN TARGET DETAILS

Name	TVD	+N/S	+E/W	North	Easting	Latitude	Longitude	Shape
PP-330 FM Dodd Fed 11 #3H739 59	-0 36		245 00	673554 74	586247 50	32° 51' 4 936 N	104° 3' 8 947 W	Point
- plan hrs target center								
PBHL-Dodd Fed 11 #3H	4800 00	-7 20	4874 40	673547 90	590876 90	32° 51' 4 743 N	104° 2' 14 679 W	Point
- plan hrs target center								

PROJECT DETAILS

Eddy County, NM (NAN27 NME)
Geodetic System US State Plane 1927 (Exact solution)
Datum NAD 1927 (NADCON CONUS)
Ellipsoid Clarke 1866
Zone New Mexico East 3001
System Datum Mean Sea Level

SITE DETAILS

Dodd Federal Unit 11 #3H
Site Centre Northing 673555 10
Easting 586002 50

Positional Uncertainty 0 00
Convergence 0 15
Local North Grid

LEGEND

- Submarine 10 Federal Com #3H, OH Plan #2 8-3/4" Hole V0
- Submarine 10 Federal Com #3H, OH Plan #2 8-3/4" Hole V0
- Submarine 10 Federal Com #4H, OH Plan #2 8-3/4" Hole V0
- Submarine 11 Federal Com #3H, OH Plan #1 8-3/4" Hole V0
- Submarine 11 Federal Com #3H, OH Plan #1 8-3/4" Hole V0
- Submarine 11 Federal Com #4H, OH Plan #1 8-3/4" Hole V0
- Dodd Federal Unit #522, OH Plan #1 7-7/8" Hole V0
- Dodd Federal Unit #522, OH Plan #1 7-7/8" Hole V0
- Plan #1 - 8-3/4" Hole

Map System US State Plane 1927 (Exact solution)
Datum NAD 1927 (NADCON CONUS)
Ellipsoid Clarke 1866
Zone Name New Mexico East 3001

Local Origin Site Dodd Federal Unit 11 #3H Grid North

Latitude 32° 51' 4 945 N
Longitude 104° 3' 11 819 W

Grid East 586002 50
Grid North 673555 10
Scale Factor 1 000

Geomagnetic Model IGRF2010

Sample Date 30-Jan-12

Magnetic Declination 7 78°




Dip Angle from Horizontal 60 67°

Magnetic Field Strength 48876


To convert a Magnetic Direction to a Grid Direction Add 7 63°

To convert a Magnetic Direction to a True Direction Subtract 0 15°

To convert a True Direction to a Grid Direction Subtract 0 15°

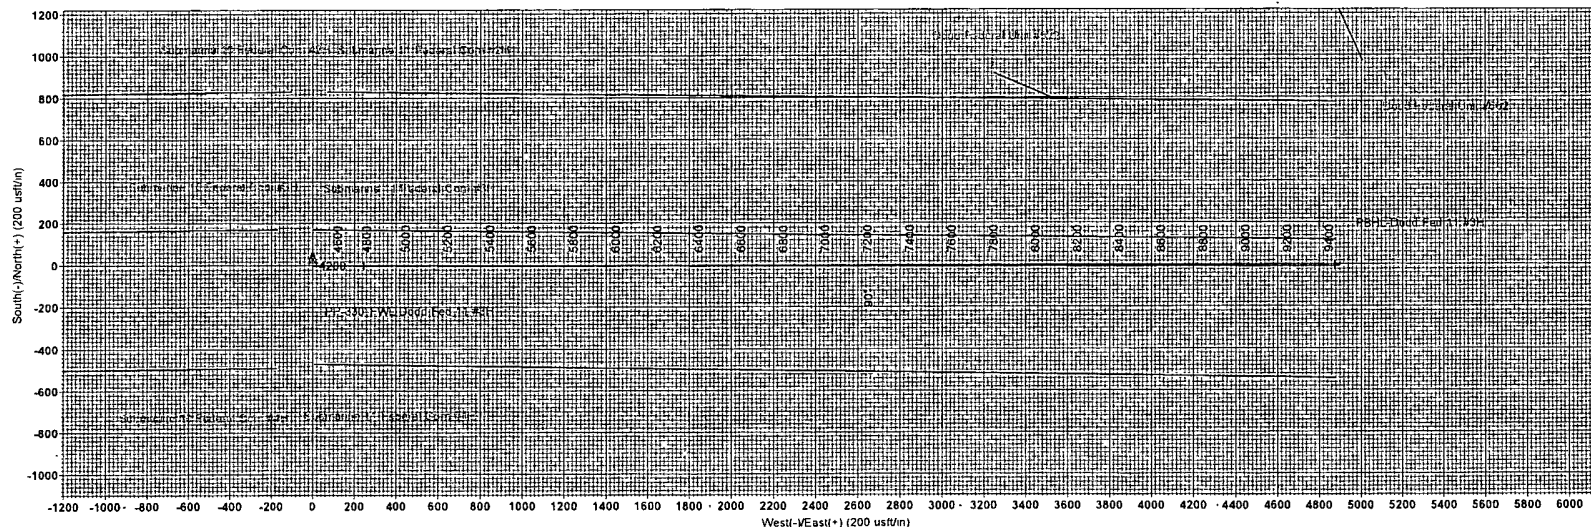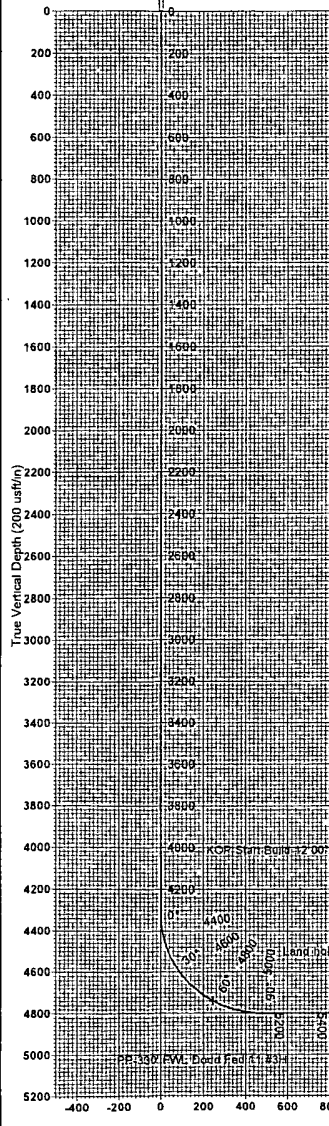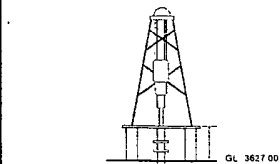


13 5/8" 2K ANNULAR

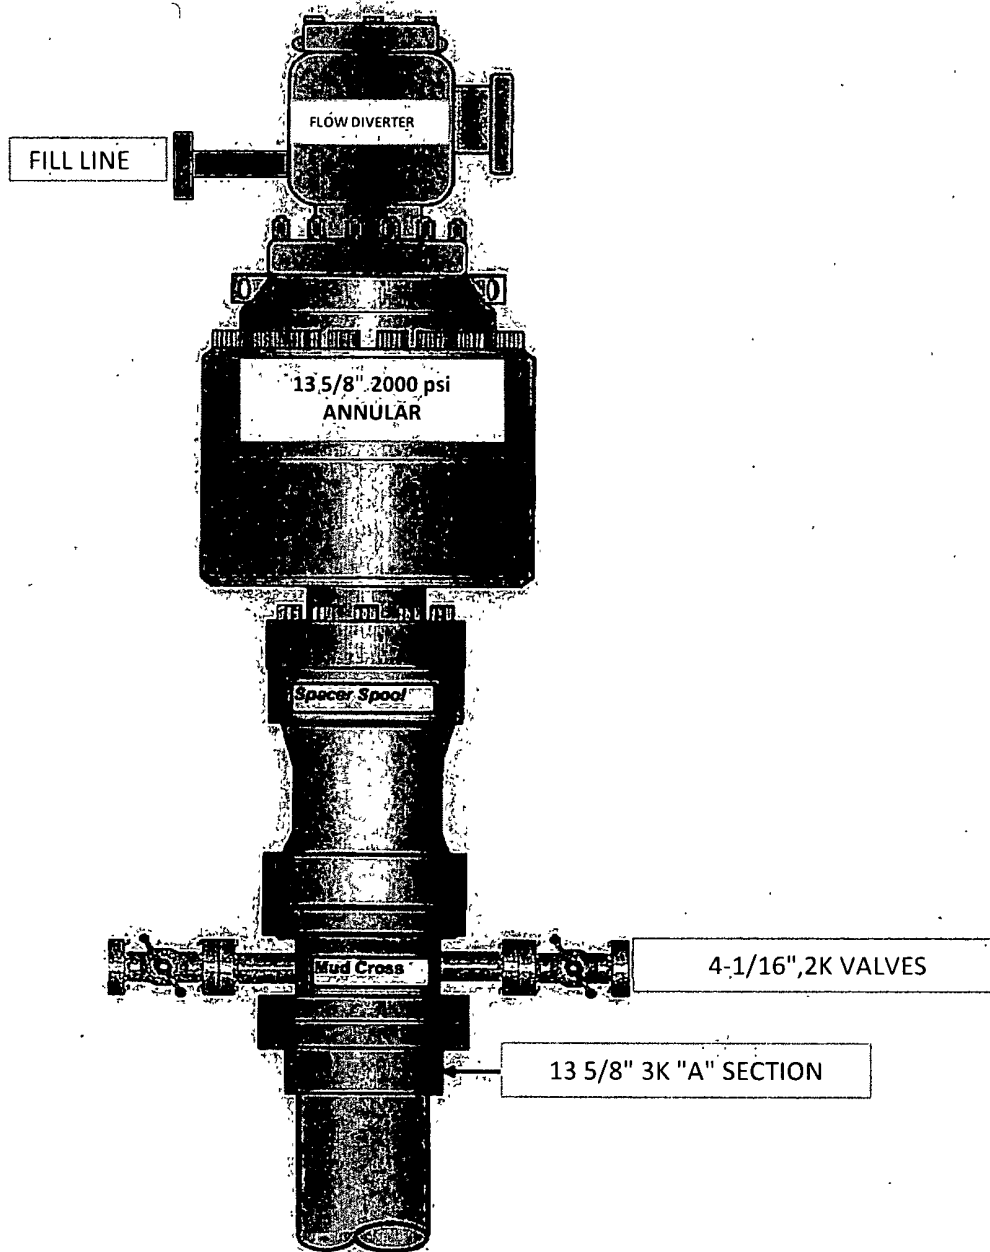


COG Operating LLC

Exhibit #9

BOPE and Choke Schematic

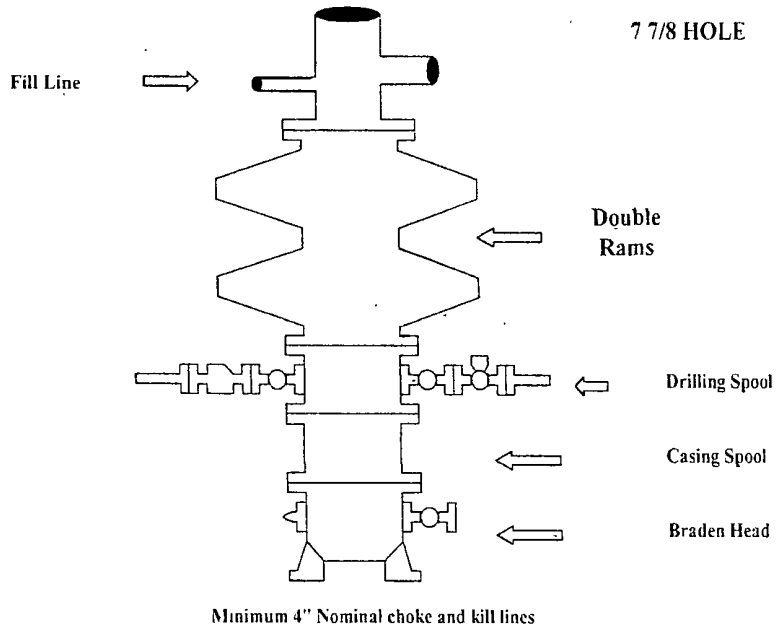

Choke Manifold Requirement (2000 psi WP)
No Annular Required

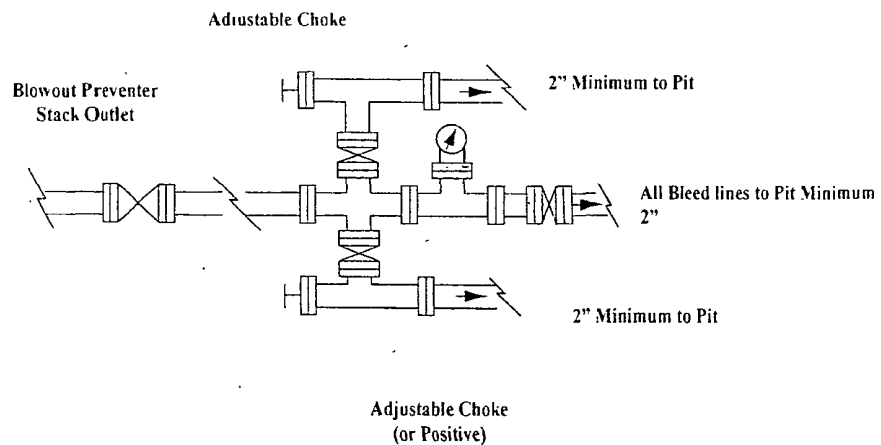


NOTES REGARDING THE BLOWOUT PREVENTERS

**Master Drilling Plan
Eddy County, New Mexico**

1. Drilling nipple to be so constructed that it can be removed without use of a welder through rotary table opening. with minimum I.D. equal to preventer bore.
2. Wear ring to be properly installed in head.
3. Blow out preventer and all fittings must be in good condition, 2000 psi WP minimum.
4. All fittings to be flanged.
5. Safety valve must be available on rig floor at all times with proper connections, valve to be full 2000 psi WP minimum.
6. All choke and fill lines to be securely anchored especially ends of choke lines.
7. Equipment through which bit must pass shall be at least as large as the diameter of the casing being drilled through.
8. Kelly cock on Kelly.
9. Extension wrenches and hands wheels to be properly installed.
10. Blow out preventer control to be located as close to driller's position as feasible.
11. Blow out preventer closing equipment to include minimum 40-gallon accumulator, two independent sources of pump power on each closing unit installation all API specifications.

COG Operating LLC
Closed Loop Equipment Diagram

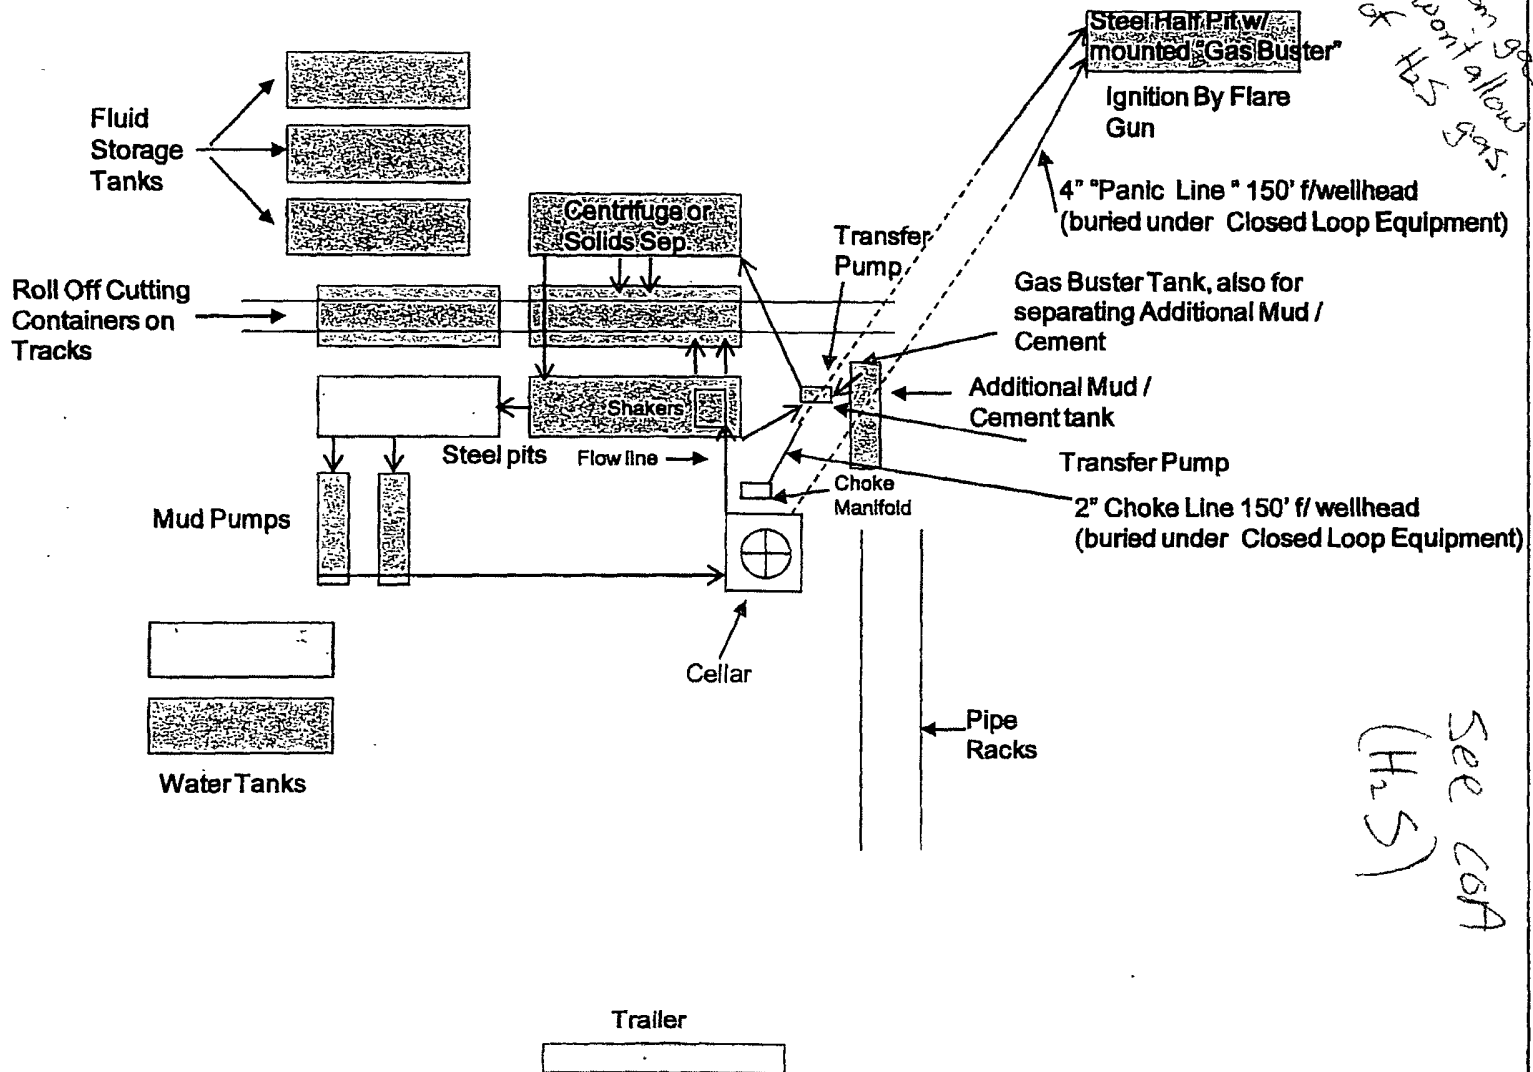

Closed Loop Operation & Maintenance Procedure

All drilling fluid circulated over shaker(s) with cuttings discharged into roll off container.

Fluid and fines below shaker(s) are circulated with transfer pump through centrifuge(s) or solids separator with cuttings and fines discharged into roll off container.

Fluid is continuously re-circulated through equipment with polymer added to aid separation of cutting fines.

Roll off containers are lined and de-watered with fluids re-circulated into system.

Additional tank is used to capture unused drilling fluid or cement returns from casing jobs.

This equipment will be maintained 24 hrs./day by solids control personnel and or rig crews that stay on location.

Cuttings will be hauled to either:

CRI (permit number R9166)

or

GMI (permit number 711-019-001)

dependent upon which rig is available to drill this well.

COG Operating LLC

Hydrogen Sulfide Drilling Operation Plan

I. HYDROGEN SULFIDE TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

1. The hazards and characteristics of hydrogen sulfide (H₂S)
2. The proper use and maintenance of personal protective equipment and life support systems.
3. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
4. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H₂S on metal components. If high tensile tubular are to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
3. The contents and requirements of the H₂S Drilling Operations Plan and Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan. **The concentrations of H₂S of wells in this area from surface to TD are low enough that a contingency plan is not required.**

II. H2S SAFETY EQUIPMENT AND SYSTEMS

Note: All H2S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonable expected to contain H2S.

1. Well Control Equipment:

- A. Flare line.
- B. Choke manifold.
- C. Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.
- D. Auxiliary equipment may include if applicable: annular preventer & rotating head.

2. Protective equipment for essential personnel:

- A. Mark II Survive air 30-minute units located in the doghouse and at briefing areas, as indicated on well site diagram.

3. H2S detection and monitoring equipment:

- A. 1 portable H2S monitors positioned on location for best coverage and response. These units have warning lights and audible sirens when H2S levels of 20 PPM are reached.

4. Visual warning systems:

- A. Wind direction indicators as shown on well site diagram (Exhibit #8).
- B. Caution/Danger signs (Exhibit #7) shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate. See example attached.

5. Mud program:

- A. The mud program has been designed to minimize the volume of H2S circulated to surface. Proper mud weight, safe drilling practices, and the use of H2S scavengers will minimize hazards when penetrating H2S bearing zones.

6. Metallurgy:

- A. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
- B. All elastomers used for packing and seals shall be H2S trim.

7. Communication:

- A. Radio communications in company vehicles including cellular telephone and 2-way radio.
- B. Land line (telephone) communication at Office.

8. Well testing:

- A. Drill stem testing will be performed with a minimum number of personnel in the immediate vicinity, which are necessary to safely and adequately conduct the test. The drill stem testing will be conducted during daylight hours and formation fluids will not be flowed to the surface. All drill-stem-testing operations conducted in an H2S environment will use the closed chamber method of testing.
- B. There will be no drill stem testing.

EXHIBIT #7

WARNING
YOU ARE ENTERING AN H2S
AUTHORIZED PERSONNEL ONLY

- 1. BEARDS OR CONTACT LENSES NOT ALLOWED
- 2. HARD HATS REQUIRED
- 3. SMOKING IN DESIGNATED AREAS ONLY
- 4. BE WIND CONSCIOUS AT ALL TIMES
- 5. CHECK WITH COG OPERATING FOREMAN AT

COG OPERATING LLC
1-432-683-7443
1-575-746-2010

EDDY COUNTY EMERGENCY NUMBERS

ARTESIA FIRE DEPT. 575-746-5050
ARTESIA POLICE DEPT. 575-746-5000
EDDY CO. SHERIFF DEPT. 575-746-9888


LEA COUNTY EMERGENCY NUMBERS

HOBBS FIRE DEPT. 575-397-9308
HOBBS POLICE DEPT. 575-397-9285
LEA CO. SHERIFF DEPT. 575-396-1196


COG Operating LLC

Drilling Location - H2S Safety Equipment Diagram

EXHIBIT 8

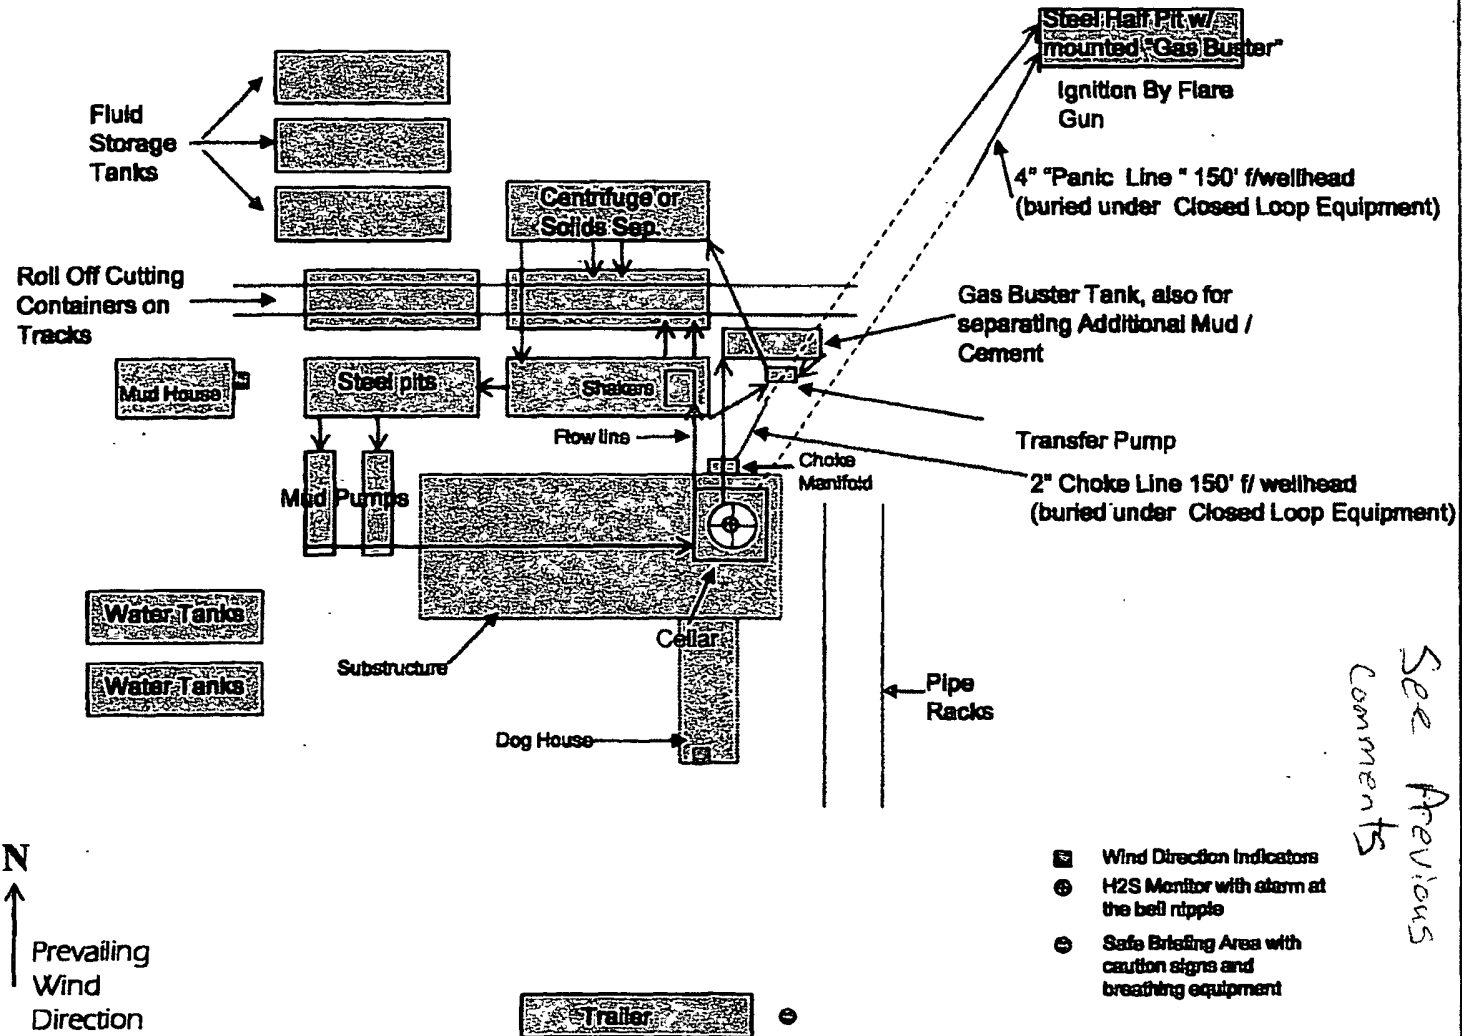

See Previous comments

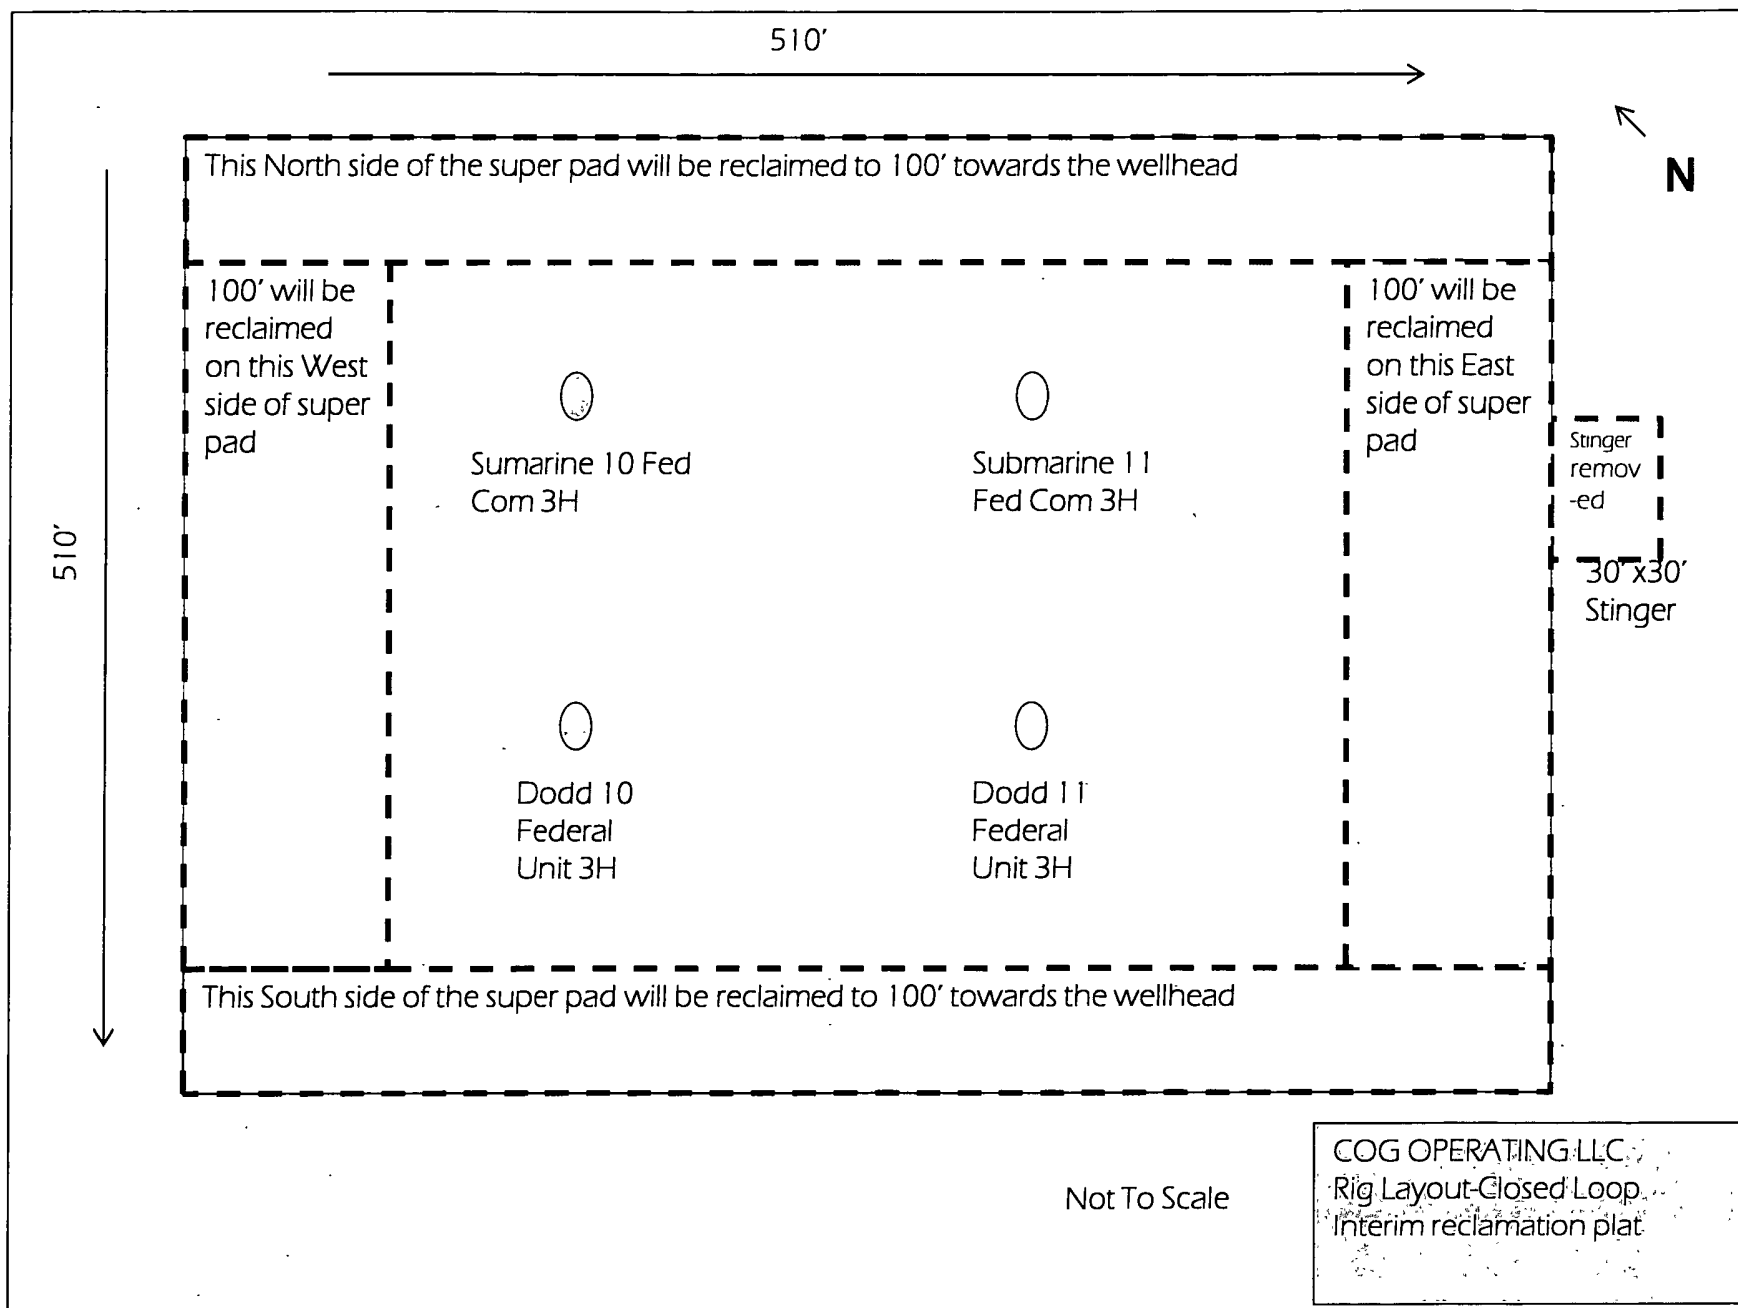

PECOS DISTRICT CONDITIONS OF APPROVAL

OPERATOR'S NAME:	COG OPERATING, LLC
LEASE NO.:	NM125007
WELL NAME & NO.:	113H-DODD FEDERAL UNIT
SURFACE HOLE FOOTAGE:	1775'/N. & 85'/W.
BOTTOM HOLE FOOTAGE:	1775'/N. & 330'/E.
LOCATION:	Section 11, T. 17 S., R. 29 E., NMPM
COUNTY:	Eddy County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Lesser Prairie-Chicken Timing Stipulations
 - Ground-level Abandoned Well Marker
- ☐ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☐ **Road Section Diagram**
- ☒ **Drilling**
 - H2S requirement
 - Logging requirement
 - Waste Material and Fluids
- ☐ **Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
 - Electric Lines
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**