

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

FEB 11 2013

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010**SUNDRY NOTICES AND REPORTS ON WELLS**
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use form 3160-3 (APD) for such proposals.5. Lease Serial No.
NMLC048479B

6. Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

7. If Unit or CA/Agreement, Name and/or No.

1. Type of Well
☒ Oil Well ☐ Gas Well ☐ Other8. Well Name and No.
CHRIS ROBIN 20 FEDERAL 92. Name of Operator
OXY USA WTP LPContact: JENNIFER A DUARTE
E-Mail: JENNIFER_DUARTE@OXY.COM9. API Well No.
30-015-406743a. Address
PO BOX 4294
HOUSTON, TX 772103b. Phone No. (include area code)
Ph: 713-513-664010. Field and Pool, or Exploratory
ARTESIA GLORIETA YESO

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Sec 20 T17S R28E NENW 875FNL 2140FWL

11. County or Parish, and State

EDDY COUNTY, NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

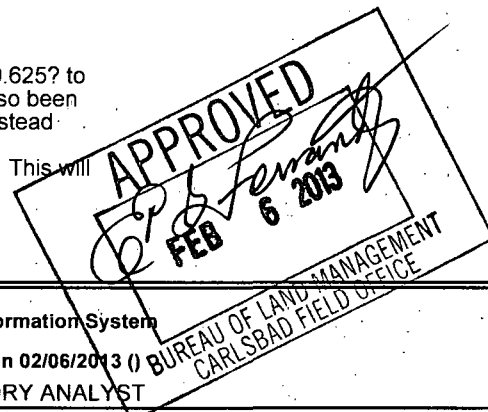
TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Change to Original A
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	PD

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

OXY USA WTP LP respectfully request permission to make the below described changes to the casing and cementing plan for the above metioned location. Please see the attached for more information and details.

SUMMARY OF CHANGES:

- a. Based off historic wells drilled in the area, the surface casing has been changed from 9.625" to 8.625". The new casing characteristics can be found below. The surface hole size has also been adjusted from 12.25" to 11". In an effort to save costs, the conductor will be set at 80" instead of 120".
- b. Due to the casing and hole size change, the cement volumes have also been adjusted. This will allow us to cut down on the excess cement having to be hauled off and exposed of.

Accepted for record
NMOCD 2/14/13

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #196187 verified by the BLM Well Information System
For OXY USA WTP LP, sent to the Carlsbad
Committed to AFMSS for processing by KURT SIMMONS on 02/06/2013

Name (Printed/Typed) JENNIFER A DUARTE

Title REGULATORY ANALYST

Signature (Electronic Submission)

Date 02/05/2013

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

PETROLEUM ENGINEER	
Approved By _____	Title _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****

SUMMARY OF CHANGES:

- a. Based off historic wells drilled in the area, the surface casing has been changed from 9.625" to 8.625". The new casing characteristics can be found below. The surface hole size has also been adjusted from 12.25" to 11". In an effort to save costs, the conductor will be set at 80' instead of 120'.
- b. Due to the casing and hole size change, the cement volumes have also been adjusted. This will allow us to cut down on the excess cement having to be hauled off and exposed of.

CASING PROGRAM:

Surface Casing: 8.625" casing set at \pm 450' MD / 450' TVD in a 11" hole filled with 10 ppg mud

Interval	Length	Wt	Gr	Condition	Cplg	Coll Rating (psi)	Burst Rating (psi)	Jt Str (M-lbs)	ID (in)	Drift (in)	SF Coll	SF Burst	SF Ten
0'- 450'	450'	24	J-55	New	ST&C	1370	2950	381	8.097	7.972	10.17	1.72	45.54

Production Casing: 5.5" casing set at \pm 5300' MD / 5300' TVD in a 7.875" hole filled with 9.2 ppg mud

Interval	Length	Wt	Gr	Condition	Cplg	Coll Rating (psi)	Burst Rating (psi)	Jt Str (M-lbs)	ID (in)	Drift (in)	SF Coll	SF Burst	SF Ten
0'- 5300'	5300'	17	L-80	New	LT&C	6290	7740	338	4.892	4.767	2.48	3.86	4.37

Collapse and burst loads calculated using Stress Check with actual anticipated loads.

CEMENT PROGRAM:**Surface Interval**

Interval	Amount sx	Ft of Fill	Type	Gal/Sk	PPG	Ft ³ /sk	24 Hr Comp
Surface (TOC: 0' - 450')							
Lead: 0' - 450' (125% Excess)	210	450'	Premium Plus Cement: 1 % Calcium Chloride - Flake	6.36	14.8	1.34	1608 psi

Production Interval

Interval	Amount sx	Ft of Fill	Type	Gal/Sk	PPG	Ft ³ /sk	24 Hr Comp
Production (TOC: 0' - 5300')							
Lead: 0' - 3200' (98 % Excess)	420	3200'	Interfill C: 0.4% HR-800, 0.25% D-Air 5000	14.34	11.9	2.48	327 psi
Tail: 3200' - 5300' (98 % Excess)	435	2100'	Premium Plus Cement: 0.5% Halad @-344, 0.2 % Well Life 734, 5 lbm/sk Microbond, 0.3% Econolite, 0.3% CFR-3	7.72	14.2	1.55	1914 psi