

Submit 3 Copies To Appropriate District
Office

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Ave., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised June 10, 2003

WELL API NO.

30-015-31044

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name

Geronimo 33 State

8. Well Number

1

9. OGRID Number

020451

10. Pool name or Wildcat
Empire, Penn (76440)

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS.)

1. Type of Well:

Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

SDX Resources, Inc.

3. Address of Operator

PO Box 5061, Midland, TX 79704

4. Well Location

Unit Letter F : 1700 feet from the North line and 2020 feet from the West line

Section 33

Township 17S

Range 28E

NMPM

Eddy

County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

3665' GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

13-3/8" 54.4# csg @ 546'. Cmt Circ. 9-5/8" 30# csg @ 2703'. Cmt circ. 5-1/2" 17# P110 N80 TOC @ 2142'. Perf'd & sqzd w/155 sx from 575'-Surf when P&A in 12/2004. PBTD 9449' (CIBP w/35' cmt). Perf 7215'-66 sqzd w/200 sx H.
Perfs: 7505-10, 50-52, 68-78, 92-98, 7616-20, 38-40, 7706-10, 16-20, 60-70, 7886-7904, 8114-24, 41-45, 8264-70, 8330-40, 50-54, 8416-20, 74-78, 88-90, 8576-86, 8608-12, 14-18, 30-34, 50-60, 8758-60, 8820-24, 40-50, 8898-8902, 8948-50, 65-75, 9021-26, 90-92, 9142-48, 9230-34. Tops: Strawn 9142', Cisco 7765', Wolfcamp 7165'.

PROPOSE TO P&A AS FOLLOWS:

25 sx @ 9150', 25 sx @ 7750', 25 sx @ 7100', 25 sx @ 4550', 25 sx @ 3500', 25 sx @ 2750', 25 sx @ 575', 10 sx @ surf plug. Install marker.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Chuck Morgan TITLE Engineer DATE 9/29/05

Type or print name Chuck Morgan

E-mail address: cmorgan@sdresources.com

Telephone No. 432/685-1761

(This space for State use)

APPROVED BY Phil Hankin TITLE Field Supv. DATE 10/19/05

Conditions of approval, if any:

If earthen pits are used in
association with this work a
pit permit is required prior
to construction

Notify OCD 24 hrs. prior to
any work done.

ST. 4


FIELD AREA: Empire Penn

ON: 1700 FNL 2020 FNL Sec. 33 T12S R28E Eddy Co., N.M.

613665 ZERO: ' AGL: ' ORIG. DRLG./COMPL. DATE: ' COMMENTS:

CASING PROGRAM:

SIZE/WT./GR./CONN.	DEPTH SE
13 1/4" 54.4# 250 sks. Lite 200 sks. "c" (circ. 54 sks.)	546'
9 5/8" 36# J-55 700 sks. "c" interfill, 250 "c" (circ. 150 sks.)	2703'
5 1/2" 17# P-110 & N-80 2 stg.	10599'
1) 350 sks. interfill 1400 sks. 2) 750 sks. 50/50 PZ circ. 75 sks.	
(note on sample report TPC 2142)	

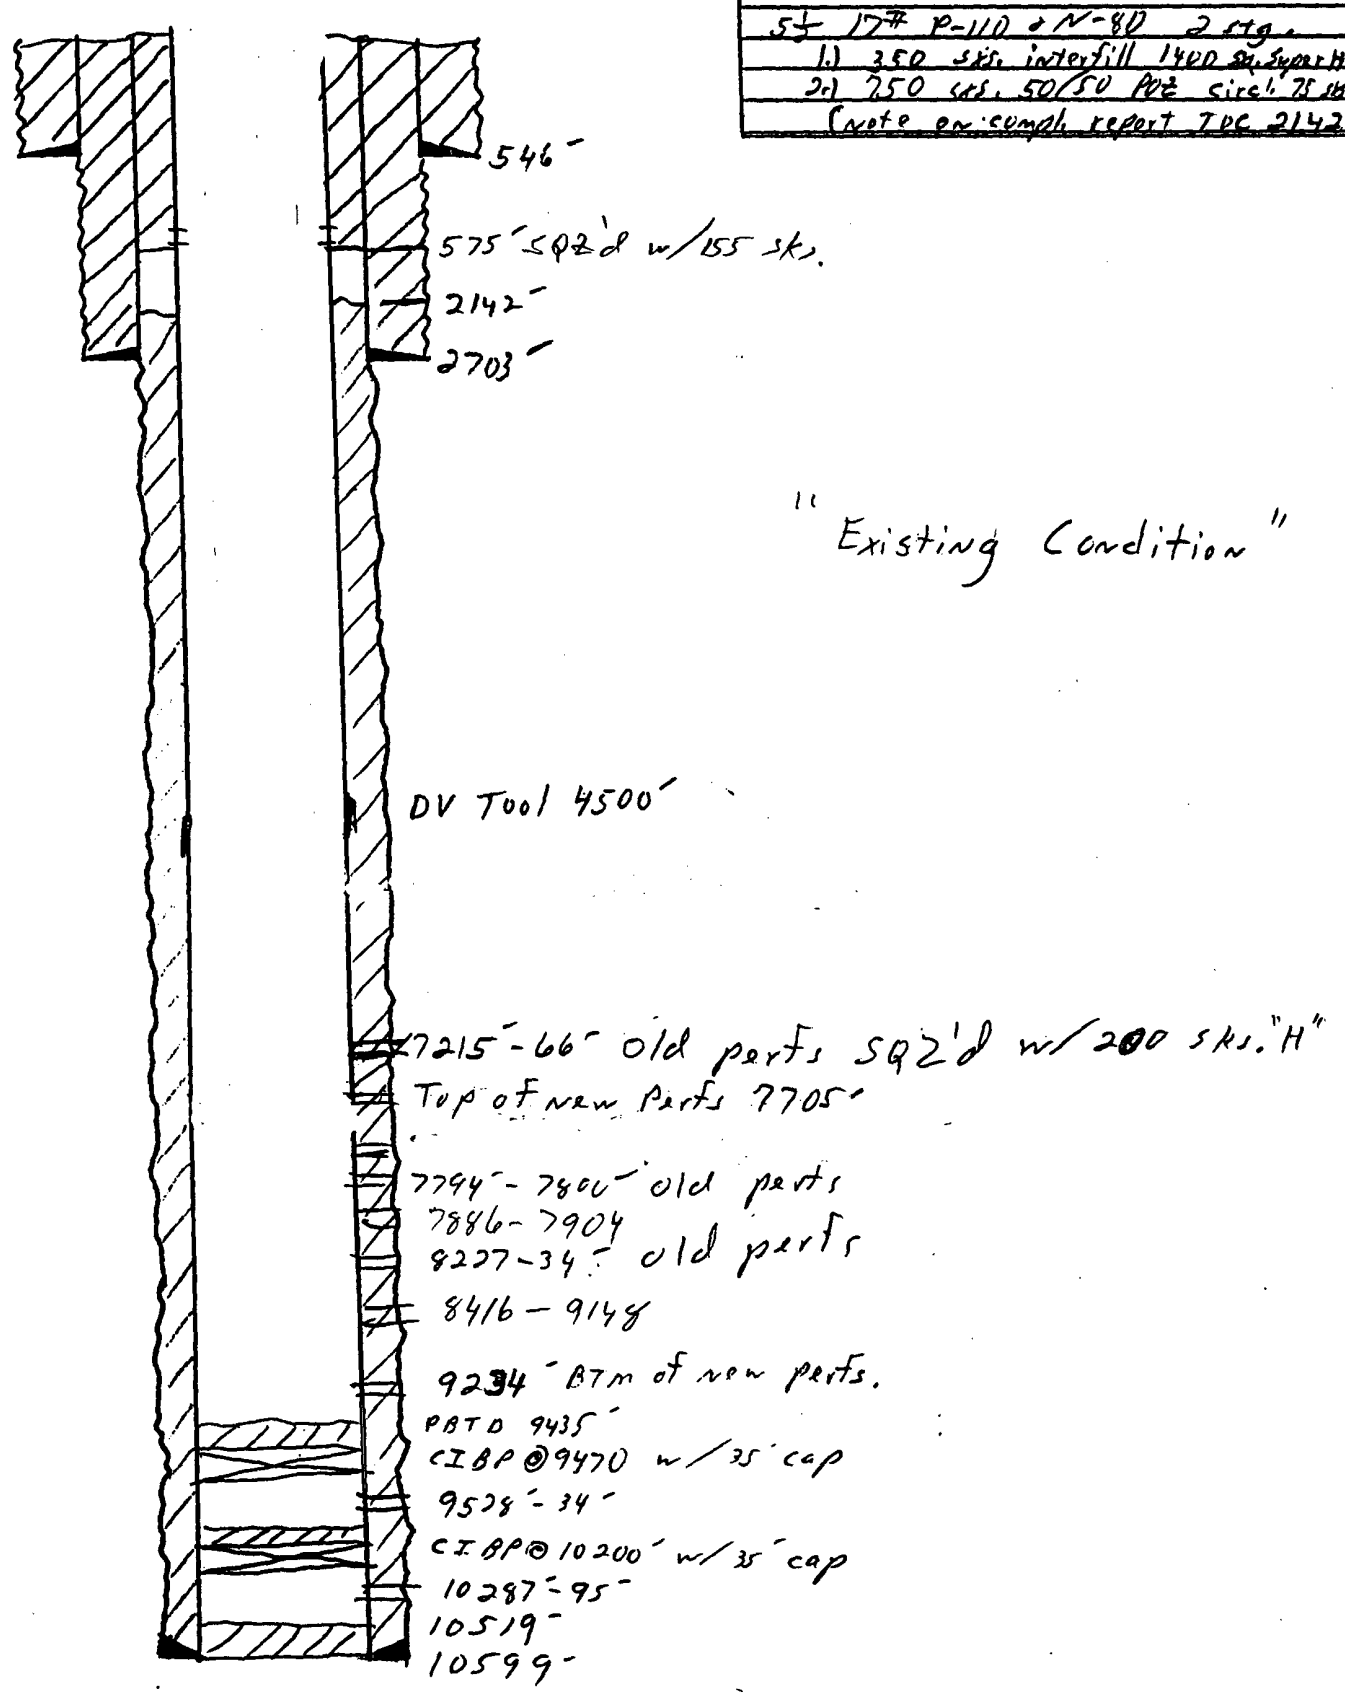

"Existing Condition"

- SKETCH NOT TO SCALE -

REVISED: 10/10/05

FIELD AREA: Empire Penn

ON: 1700 FNL 2020 FNL Sec. 33 T12S R28E Eddy Co., N.M.

613665' ZERO: _____ ' AGL: _____


ORIG. DRLG./COMPL. DATE: _____

COMMENTS:

CASING PROGRAM:

SIZE/WT./GR./CONN.	DEPTH SE
13 1/4" 54.4# 250 sts. Lite 200 SH, "C"	546"
(circ. 54 SH.)	
9 1/2" 36# J-SS 700 SH, "C"	2703
interfill, 250 "C"	
(circ. 150 SH.)	
5 1/2" 17# P-110 + N-80 2 stg.	10599
1.) 350 SH. interfill 1400 SH. 50/50	
2.) 750 SH. 50/50 P&E circ. 75 SH.	
(note on compl. report TPC 2142)	

Proposed Plugs

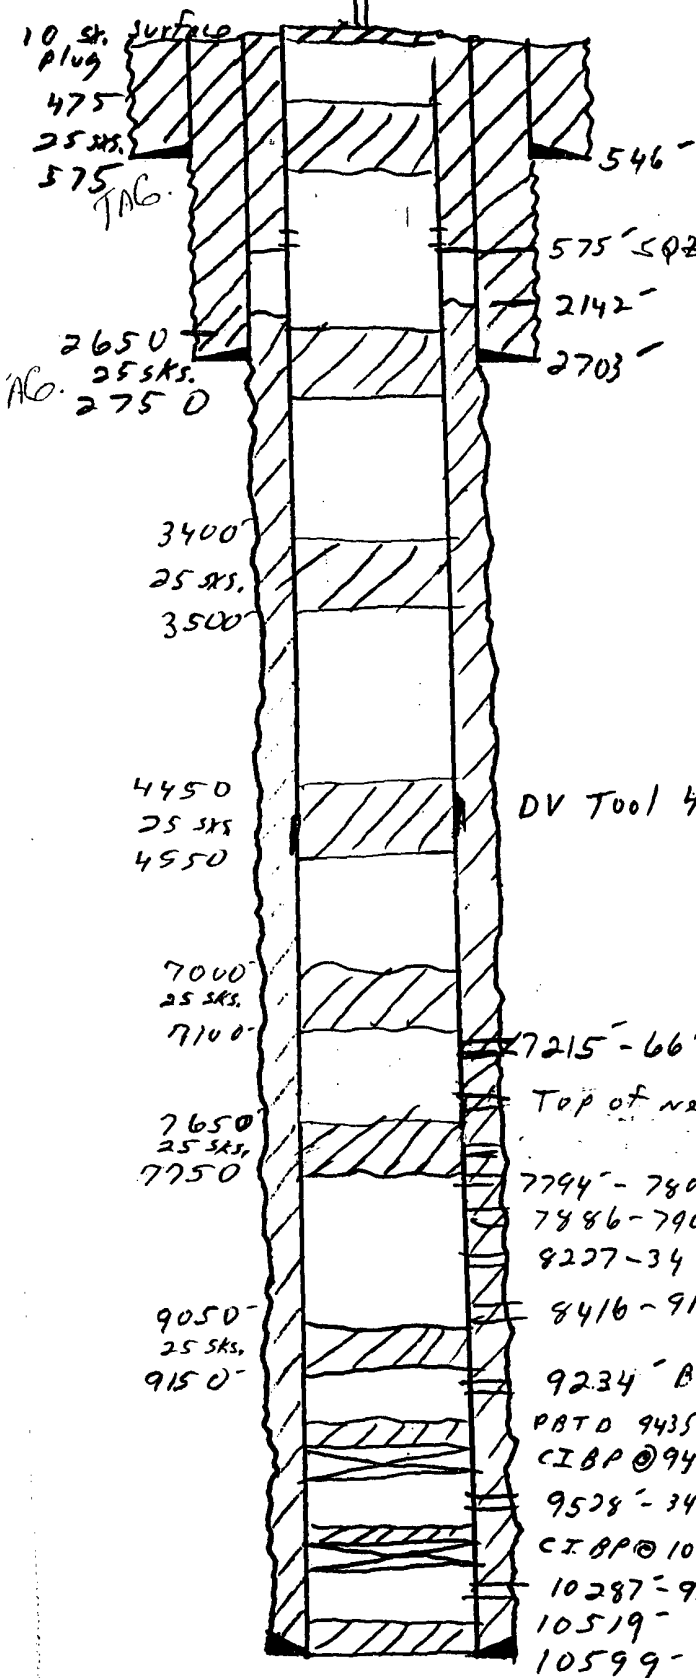

"Proposed Condition"

- SKETCH NOT TO SCALE -

REVISED: 10/10/05