UNITED STATES DEPARTMENT OF THE INTERIOR (Other Instructions on re-

SUBMIT IN TRIPLICATE*

Form approved. Budget Bureau No. 5. LEASE DESIGNATION AND SERIAL SF078875

CEOL	OCICAL	SHRVEY	


SUNDRY	NOTICES	AND	REPORTS	ON Y	WELLS
		dull on to	doopen or plug	book to	a different re

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

16. Ch	eck Appropriate Box To Indicate Nature of Notice, Report,		
14. PERMIT NO.	15. ELEVATIONS (Show whether DF, RT, GR, etc.) 6619 GL	Rio Arriba New Mexico	
		N.M.P.M.	
810'S, 1565'E		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec. 33, T-25-N, R-6-W	
See also space 17 below.) At surface		Ballard PC	
,	cation clearly and in accordance with any State requirements.	10. FIELD AND POOL, OR WILDCAT	
P. O. Box 990, Far	mington, M 87401	273	
3. ADDRESS OF OPERATOR		9. WELL NO.	
El Paso Natural Ga	Canyon Largo Unit		
2. NAME OF OPERATOR	8. FARM OR LEASE NAME		
OIL GAS O	THER	Canyon Largo Unit	
1.		7. UNIT AGREEMENT NAME	
(Do not use this form for Use "A	r proposals to drill or to deepen of plug back to a different reservoir. PPLICATION FOR PERMIT—" for such proposals.)		

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:			
TEST WATER SHUT-OFF FRACTURE TREAT SHOOT OR ACIDIZE		PULL OR ALTER CASING MULTIPLE COMPLETE ABANDON*		WATER SHUT-OFF FRACTURE TREATMENT SHOOTING OR ACIDIZING	REPAIRING WELL ALTERING CASING ABANDONMENT*
REPAIR WELL (Other)		CHANGE PLANS		(Other) (Note: Report results of mult Completion or Recompletion Re	iple completion on Well

- 17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.) *
 - TD 2494'. Ran 96 joints 2 7/8'', 6.4#, J-55 production casing, 2482' set at 2494'. Baffle set at 2484'. Cemented with 313 cu. ft. cement. 04-05-75 WOC 18 hours. Top of cement at 1375'.
 - Tested casing to 4000#--OK. 07-25-75 PBTD 2484'. Perf'd 2406', 2411', 2416', 2460', 2465', 2470' with 3 shots per zone. Frac'd with 42,000#--20/40 sand and 42,000 gallons treated water. Dropped no balls. Flushed with 550 gallons water.

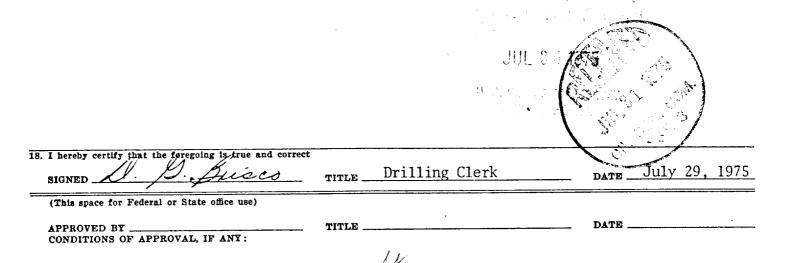

*See Instructions on Reverse Side