

Operator Name/Number: Occidental Permian LP 157984
 Lease Name/Number: Devon 6 Fee #2H
 Pool Name/Number: Willow Lake Bone Spring 64450
 Surface Location: 1980 FNL 300 FEL H Sec 6 T25S R28E
 Top Perf: 1980 FNL 330 FEL H Sec 6 T25S R28E
 Bottom Perf: 1980 FNL 330 FWL 5 (E) Sec 6 T25S R28E
 Bottom Hole Location: 1980 FNL 180 FWL 5 (E) Sec 6 T25S R28E

C-102 Plats: 3/13/14 1/7/15 1/19/15 Elevation: 3041.8' GL Objective: 2nd Bone Spring

Proposed TD: Horizontal Lateral 8020' TVD 12625' TMD

SL - Lat: 32.1609510 Long: 104.1187683 X=566397.6 Y=422341.2 NAD - 1927
 TP - Lat: 32.1609514 Long: 104.1188653 X=566367.6 Y=422341.3 NAD - 1927
 BP - Lat: 32.1609934 Long: 104.1339572 X=561697.4 Y=422347.6 NAD - 1927
 BH - Lat: 32.1609947 Long: 104.1344419 X=561547.4 Y=422347.8 NAD - 1927

Casing Program:

Hole Size	Interval	OD Csg	Weight	Collar	Grade	Condition	Collapse Design Factor	Burst Design Factor	Tension Design Factor
14-3/4"	0-525'	11-3/4"	47	BT&C	J55	New	14.12	1.42	5.65
				Hole filled with 8.4# Mud			1514#	3072#	
10-5/8"	0-2500'	8-5/8"	32	BT&C	J-55	New	4.41	1.34	2.99
				Hole filled with 10.0# Mud			2533#	3928#	
7-7/8"	0-12625'	5-1/2"	17	BT&C	L-80	New	1.65	1.2	1.82
				Hole filled with 9.6# Mud			6290#	7740#	

Collapse and burst loads calculated using Stress Check with anticipated loads

Cement Program:

- a. 11-3/4" Surface Circulate cement to surface w/ 470sx PPC cmt w/ 1% CaCl₂, 14.8ppg 1.336 yield 1620# 24hr CS 200% Excess
- b. 8-5/8" Intermediate Circulate cement to surface w/ 410sx HES Light PPC cmt w/ 5% salt + .5% HR-800, 12.9ppg 1.854 yield 824# 24hr CS 200% Excess followed by 400sx PPC cmt, 14.8ppg 1.326 yield 1789# 24hr CS 125% Excess
- c. 5-1/2" Production Cement w/ 680sx Tuned Light cmt w/ 1#/sx Kol-Seal + .125#/sx Poly-E-Flake + .35% HR-601, 10.2ppg 3.199 yield 555# 24hr CS 150% Excess followed by 875sx Super H cmt w/ 3#/sx salt + .3% CFR-3 + .5% Halad-344 + 2#/sx Kol-Seal, 13.2ppg 1.652 yield 1462# 24hr CS 50% Excess. Calc TOC 1500'

Description of Cement Additives: Calcium Chloride, Salt (Accelerator); CFR-3 (Dispersant); Kol-Seal, Poly-E-Flake (Lost Circulation Additive); Halad-344 (Low Fluid Loss Control); HR-601, HR-800 (Retarder)
 The above cement volumes could be revised pending the caliper measurement.

Proposed Mud Circulation System:

Depth	Mud Wt. ppg	Visc sec	Fluid Loss	Type System
0 - 525'	8.4-8.9	32-34	NC	Fresh Water/Spud Mud
525 - 2500'	10	28-29	NC	Fresh water/NaCl Brine
2500 - 7450'	8.6-9.0	28-29	NC	Cut Brine/Sweeps
7450 - TD	8.6-9.6	28-32	NC	Cut Brine/Sweeps

Pump high viscosity sweeps as needed for hole cleaning. The mud system will be monitored visually/manually as well as with an electronic PVT. The necessary mud products for additional weight and fluid loss control will be on location at all times. Appropriately weighted mud will be used to isolate potential gas, oil, and water zones until such time as casing can be cemented into place for zonal isolation.

BOP Program:

Surface None
 Intermediate/Production 13-5/8" 10M three ram stack w/ 5M annular preventer, 5M Choke Manifold

Estimated Tops of Geological Markers & Depths of Anticipated Fresh Water, Oil or Gas:


Geological Marker	Depth	Type
a. Rustler	500'	Formation
b. Top Salt	870'	Formation
c. Bottom Salt	2375'	Formation
d. Delaware	2485'	Formation
e. Delaware-Bell Canyon	2514'	Oil/Gas
f. Delaware-Cherry Canyon	3273'	Oil/Gas
g. Delaware-Brushy Canyon	4488'	Oil/Gas
h. Bond Spring	6023'	Oil/Gas
i. 1st Bone Spring	7041'	Oil/Gas
j. 2nd Bone Spring	7236'	Oil/Gas

Fresh water may be present above the Rustler formation. Surface casing will be set below the top of the Rustler, which will cover potential fresh water sources.

A closed loop system will be utilized consisting of above ground steel tanks and haul-off bins.
 Disposal of liquids, drilling fluids and cuttings will be disposed of at an approved facility.

APPD Attachments

015-42931




Devon 6 Fee 2H
Eddy County, NM (NAD 27 NME)
Northing: 422341.20
Easting: 566397.60
Plan #1




Azimuths to Grid North
 True North: -0.11°
 Magnetic North: 7.45°
 Magnetic Field
 Strength: 48307.6sn
 Dip Angle: 60.00°
 Date: 1/14/2011
 Model: HDGM

To convert Magnetic North to Grid, Add 7.45°
 To convert True North to Grid, Subtract 0.11°



KB @ 3066.80usft
 Gr. @ 3041.80

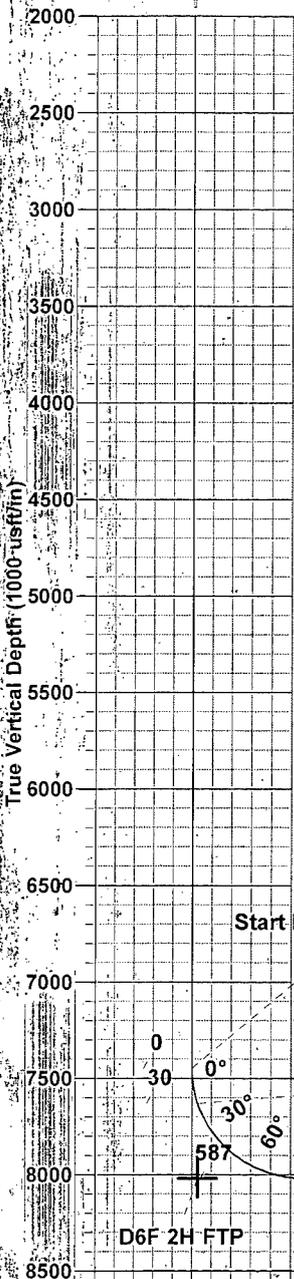



WELL DETAILS D6F 2H					
Ground Level: 3041.80					
+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.00	0.00	422341.20	566397.60	32° 9' 39.423 N	104° 7' 7.566 W

SECTION DETAILS								
MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	V Sect
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7447.22	0.00	0.00	7447.22	0.00	0.00	0.00	0.00	0.00
8361.33	91.41	270.08	8020.00	0.80	-587.07	10.00	270.08	587.07
12625.76	91.41	270.08	7915.00	6.60	-4850.20	0.00	0.00	4850.20

DESIGN TARGET DETAILS					
Name	TVD	+N/-S	+E/-W	Northing	Easting
D6F 2H BHL	7915.00	6.60	-4850.20	422347.80	561547.40
D6F 2H LTP	7918.70	6.40	-4700.20	422347.60	561697.40
D6F 2H FTP	8020.00	0.10	-30.00	422341.30	566367.60

PROJECT DETAILS:
 Eddy County, NM (NAD 27 NME)
 Geodetic System: US State Plane 1927 (Exact solution)
 Datum: NAD 1927 (NADCON CONUS)
 Ellipsoid: Clarke 1866
 Zone: New Mexico East 3001
 System Datum: Mean Sea Level

SITE DETAILS:
 Devon 6 Fee 2H
 Site Centre Northing: 422341.20
 Easting: 566397.60
 Positional Uncertainty: 0.00
 Convergence: 0.11
 Local North: Grid

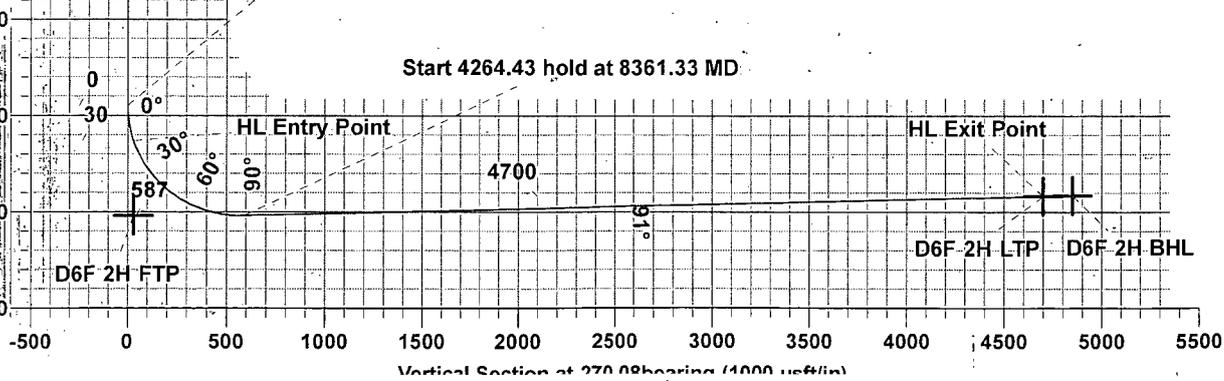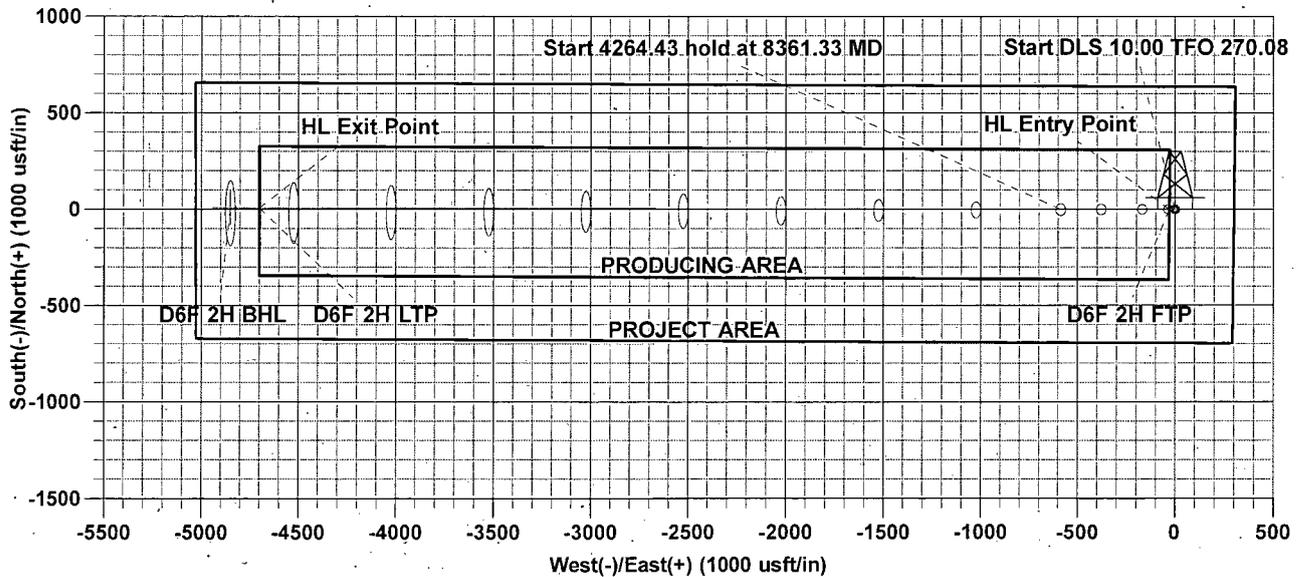

Planning Report

Database:	Midland District	Local Co-ordinate Reference:	Well D6F 2H
Company:	OXY	TVD Reference:	KB @ 3066.80usft
Project:	Eddy County, NM (NAD 27 NME)	MD Reference:	KB @ 3066.80usft
Site:	Devon 6 Fee 2H	North Reference:	Grid
Well:	D6F 2H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Project: Eddy County, NM (NAD 27 NME), New Mexico			
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site: Devon 6 Fee 2H			
Site Position:		Northing:	422,341.20 usft
From:	Map	Easting:	566,397.60 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 9' 39.423 N
		Longitude:	104° 7' 7.566 W
		Grid Convergence:	0.11 °

Well: D6F 2H			
Well Position	+N-S	0.00 usft	Northing: 422,341.20 usft
	+E-W	0.00 usft	Easting: 566,397.60 usft
Position Uncertainty		0.00 usft	Wellhead Elevation: 0.00 usft
			Latitude: 32° 9' 39.423 N
			Longitude: 104° 7' 7.566 W
			Ground Level: 3,041.80 usft

Wellbore: OH					
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM	1/14/2015	7.57	60.00	48,308

Design: Plan #1				
Audit Notes:				
Version:		Phase:	PROTOTYPE	Tie On Depth: 0.00
Vertical Section:	Depth From (TVD) (usft)	+N/S (usft)	+E/W (usft)	Direction (bearing)
	0.00	0.00	0.00	270.08

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (bearing)	Vertical Depth (usft)	+N/S (usft)	+E/W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
7,447.22	0.00	0.00	7,447.22	0.00	0.00	0.00	0.00	0.00	0.00	
8,361.33	91.41	270.08	8,020.00	0.80	-587.07	10.00	10.00	-9.84	270.08	
12,625.76	91.41	270.08	7,915.00	6.60	-4,850.20	0.00	0.00	0.00	0.00	D6F 2H BHL

Planning Report

Database:	Midland District	Local Co-ordinate Reference:	Well: D6F2H
Company:	OXY	TVD Reference:	KB @ 3066.80usft
Project:	Eddy County - NM (NAD 27 NME)	MD Reference:	KB @ 3066.80usft
Site:	Devon 6 Fee 2H	North Reference:	Grid
Well:	D6F2H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (bearing)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,100.00	0.00	0.00	5,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,200.00	0.00	0.00	5,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,300.00	0.00	0.00	5,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Planning Report

Database:	Midland District	Local Co-ordinate Reference:	Well: D6F-2H
Company:	OXY	TVD Reference:	KB @ 3066:80usft
Project:	Eddy County NM (NAD 27 NME)	MD Reference:	KB @ 3066:80usft
Site:	Devon 6 Fee 2H	North Reference:	Grid
Well:	D6F-2H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (bearing)	Vertical Depth (usft)	+N/S (usft)	+E/W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
5,400.00	0.00	0.00	5,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,500.00	0.00	0.00	5,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,600.00	0.00	0.00	5,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,700.00	0.00	0.00	5,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,800.00	0.00	0.00	5,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,900.00	0.00	0.00	5,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,000.00	0.00	0.00	6,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,100.00	0.00	0.00	6,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,200.00	0.00	0.00	6,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,300.00	0.00	0.00	6,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,400.00	0.00	0.00	6,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,500.00	0.00	0.00	6,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,600.00	0.00	0.00	6,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,700.00	0.00	0.00	6,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,800.00	0.00	0.00	6,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,900.00	0.00	0.00	6,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,000.00	0.00	0.00	7,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,100.00	0.00	0.00	7,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,200.00	0.00	0.00	7,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,300.00	0.00	0.00	7,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,400.00	0.00	0.00	7,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,447.22	0.00	0.00	7,447.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Start DLS 10.00 TFO 270.08										
7,450.00	0.28	270.08	7,450.00	0.00	-0.01	0.01	10.00	10.00	0.00	0.00
7,500.00	5.28	270.08	7,499.93	0.00	-2.43	2.43	10.00	10.00	0.00	0.00
7,550.00	10.28	270.08	7,549.45	0.01	-9.19	9.19	10.00	10.00	0.00	0.00
7,600.00	15.28	270.08	7,598.20	0.03	-20.25	20.25	10.00	10.00	0.00	0.00
7,633.46	18.62	270.08	7,630.20	0.04	-30.00	30.00	10.00	10.00	0.00	0.00
HL Entry Point										
7,650.00	20.28	270.08	7,645.79	0.05	-35.51	35.51	10.00	10.00	0.00	0.00
7,700.00	25.28	270.08	7,691.88	0.07	-54.86	54.86	10.00	10.00	0.00	0.00
7,750.00	30.28	270.08	7,736.10	0.11	-78.16	78.16	10.00	10.00	0.00	0.00
7,800.00	35.28	270.08	7,778.13	0.14	-105.22	105.22	10.00	10.00	0.00	0.00
7,850.00	40.28	270.08	7,817.64	0.18	-135.84	135.84	10.00	10.00	0.00	0.00
7,900.00	45.28	270.08	7,854.32	0.23	-169.79	169.79	10.00	10.00	0.00	0.00
7,950.00	50.28	270.08	7,887.91	0.28	-206.80	206.80	10.00	10.00	0.00	0.00
8,000.00	55.28	270.08	7,918.15	0.34	-246.60	246.60	10.00	10.00	0.00	0.00
8,050.00	60.28	270.08	7,944.80	0.39	-288.89	288.89	10.00	10.00	0.00	0.00
8,100.00	65.28	270.08	7,967.67	0.45	-333.34	333.34	10.00	10.00	0.00	0.00
8,150.00	70.28	270.08	7,986.57	0.52	-379.61	379.61	10.00	10.00	0.00	0.00
8,200.00	75.28	270.08	8,001.37	0.58	-427.35	427.35	10.00	10.00	0.00	0.00
8,250.00	80.28	270.08	8,011.95	0.65	-476.20	476.20	10.00	10.00	0.00	0.00
8,300.00	85.28	270.08	8,018.23	0.72	-525.79	525.79	10.00	10.00	0.00	0.00
8,350.00	90.28	270.08	8,020.17	0.78	-575.74	575.74	10.00	10.00	0.00	0.00
8,361.33	91.41	270.08	8,020.00	0.80	-587.07	587.07	10.00	10.00	0.00	0.00
Start 4264.43 hold at 8361.33 MD										
8,400.00	91.41	270.08	8,019.05	0.85	-625.72	625.72	0.00	0.00	0.00	0.00
8,500.00	91.41	270.08	8,016.59	0.99	-725.69	725.69	0.00	0.00	0.00	0.00
8,600.00	91.41	270.08	8,014.13	1.12	-825.66	825.66	0.00	0.00	0.00	0.00
8,700.00	91.41	270.08	8,011.67	1.26	-925.63	925.63	0.00	0.00	0.00	0.00
8,800.00	91.41	270.08	8,009.20	1.40	-1,025.60	1,025.60	0.00	0.00	0.00	0.00
8,900.00	91.41	270.08	8,006.74	1.53	-1,125.57	1,125.57	0.00	0.00	0.00	0.00
9,000.00	91.41	270.08	8,004.28	1.67	-1,225.54	1,225.54	0.00	0.00	0.00	0.00

Planning Report

Database:	Midland District	Local Co-ordinate Reference:	Well: D6F-2H
Company:	OXY	TVD Reference:	KB @ 3066.80usft
Project:	Eddy County, NM (NAD 27 NME)	MD Reference:	KB @ 3066.80usft
Site:	Devon 6 Fee 2H	North Reference:	Grid
Well:	D6F-2H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (bearing)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
9,100.00	91.41	270.08	8,001.82	1.80	-1,325.51	1,325.51	0.00	0.00	0.00	
9,200.00	91.41	270.08	7,999.35	1.94	-1,425.48	1,425.48	0.00	0.00	0.00	
9,300.00	91.41	270.08	7,996.89	2.08	-1,525.45	1,525.45	0.00	0.00	0.00	
9,400.00	91.41	270.08	7,994.43	2.21	-1,625.42	1,625.42	0.00	0.00	0.00	
9,500.00	91.41	270.08	7,991.97	2.35	-1,725.39	1,725.39	0.00	0.00	0.00	
9,600.00	91.41	270.08	7,989.50	2.48	-1,825.36	1,825.36	0.00	0.00	0.00	
9,700.00	91.41	270.08	7,987.04	2.62	-1,925.33	1,925.33	0.00	0.00	0.00	
9,800.00	91.41	270.08	7,984.58	2.76	-2,025.30	2,025.30	0.00	0.00	0.00	
9,900.00	91.41	270.08	7,982.12	2.89	-2,125.27	2,125.27	0.00	0.00	0.00	
10,000.00	91.41	270.08	7,979.65	3.03	-2,225.24	2,225.24	0.00	0.00	0.00	
10,100.00	91.41	270.08	7,977.19	3.16	-2,325.21	2,325.21	0.00	0.00	0.00	
10,200.00	91.41	270.08	7,974.73	3.30	-2,425.18	2,425.18	0.00	0.00	0.00	
10,300.00	91.41	270.08	7,972.27	3.44	-2,525.15	2,525.15	0.00	0.00	0.00	
10,400.00	91.41	270.08	7,969.81	3.57	-2,625.12	2,625.12	0.00	0.00	0.00	
10,500.00	91.41	270.08	7,967.34	3.71	-2,725.09	2,725.09	0.00	0.00	0.00	
10,600.00	91.41	270.08	7,964.88	3.84	-2,825.06	2,825.06	0.00	0.00	0.00	
10,700.00	91.41	270.08	7,962.42	3.98	-2,925.02	2,925.03	0.00	0.00	0.00	
10,800.00	91.41	270.08	7,959.96	4.12	-3,024.99	3,025.00	0.00	0.00	0.00	
10,900.00	91.41	270.08	7,957.49	4.25	-3,124.96	3,124.97	0.00	0.00	0.00	
11,000.00	91.41	270.08	7,955.03	4.39	-3,224.93	3,224.94	0.00	0.00	0.00	
11,100.00	91.41	270.08	7,952.57	4.52	-3,324.90	3,324.91	0.00	0.00	0.00	
11,200.00	91.41	270.08	7,950.11	4.66	-3,424.87	3,424.88	0.00	0.00	0.00	
11,300.00	91.41	270.08	7,947.64	4.80	-3,524.84	3,524.85	0.00	0.00	0.00	
11,400.00	91.41	270.08	7,945.18	4.93	-3,624.81	3,624.82	0.00	0.00	0.00	
11,500.00	91.41	270.08	7,942.72	5.07	-3,724.78	3,724.78	0.00	0.00	0.00	
11,600.00	91.41	270.08	7,940.26	5.20	-3,824.75	3,824.75	0.00	0.00	0.00	
11,700.00	91.41	270.08	7,937.80	5.34	-3,924.72	3,924.72	0.00	0.00	0.00	
11,800.00	91.41	270.08	7,935.33	5.48	-4,024.69	4,024.69	0.00	0.00	0.00	
11,900.00	91.41	270.08	7,932.87	5.61	-4,124.66	4,124.66	0.00	0.00	0.00	
12,000.00	91.41	270.08	7,930.41	5.75	-4,224.63	4,224.63	0.00	0.00	0.00	
12,100.00	91.41	270.08	7,927.95	5.88	-4,324.60	4,324.60	0.00	0.00	0.00	
12,200.00	91.41	270.08	7,925.48	6.02	-4,424.57	4,424.57	0.00	0.00	0.00	
12,300.00	91.41	270.08	7,923.02	6.16	-4,524.54	4,524.54	0.00	0.00	0.00	
12,400.00	91.41	270.08	7,920.56	6.29	-4,624.51	4,624.51	0.00	0.00	0.00	
12,475.75	91.41	270.08	7,918.69	6.40	-4,700.23	4,700.24	0.00	0.00	0.00	
HL Exit Point										
12,500.00	91.41	270.08	7,918.10	6.43	-4,724.48	4,724.48	0.00	0.00	0.00	
12,600.00	91.41	270.08	7,915.63	6.56	-4,824.45	4,824.45	0.00	0.00	0.00	
12,625.76	91.41	270.08	7,915.00	6.60	-4,850.20	4,850.20	0.00	0.00	0.00	
TD at 12625.76										


Planning Report

Database:	Midland District	Local Co-ordinate Reference:	Well D6F 2H
Company:	OXY	TVD Reference:	KB @ 3066.80usft
Project:	Eddy County NM (NAD 27 NME)	MD Reference:	KB @ 3066.80usft
Site:	Devon 6 Fee 2H	North Reference:	Grid
Well:	D6F 2H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Design Targets									
Target Name	Dip Angle	Dip Dir.	TVD	+N/S	+E/W	Northing	Easting	Latitude	Longitude
- hit/miss target	(°)	(bearing)	(usft)	(usft)	(usft)	(usft)	(usft)		
- Shape									
D6F 2H BHL - plan hits target center - Point	0.00	0.00	7,915.00	6.60	-4,850.20	422,347.80	561,547.40	32° 9' 39.581 N	104° 8' 3.990 W
D6F 2H LTP - plan misses target center by 0.01usft at 12475.72usft MD (7918.69 TVD, 6.40 N, -4700.20 E) - Point	0.00	0.00	7,918.70	6.40	-4,700.20	422,347.60	561,697.40	32° 9' 39.576 N	104° 8' 2.245 W
D6F 2H FTP - plan misses target center by 216.34usft at 7907.82usft MD (7859.79 TVD, 0.24 N, -175.38 E) - Point	0.00	0.00	8,020.00	0.10	-30.00	422,341.30	566,367.60	32° 9' 39.425 N	104° 7' 7.915 W

Plan Annotations				
Measured Depth	Vertical Depth	Local Coordinates		Comment
(usft)	(usft)	+N/S (usft)	+E/W (usft)	
7,447.22	7,447.22	0.00	0.00	Start DLS 10.00 TFO 270.08
7,633.46	7,630.20	0.04	-30.00	HL Entry Point
8,361.33	8,020.00	0.80	-587.07	Start 4264.43 hold at 8361.33 MD
12,475.75	7,918.69	6.40	-4,700.23	HL Exit Point
12,625.76	7,915.00	6.60	-4,850.20	TD at 12625.76

VICINITY MAP

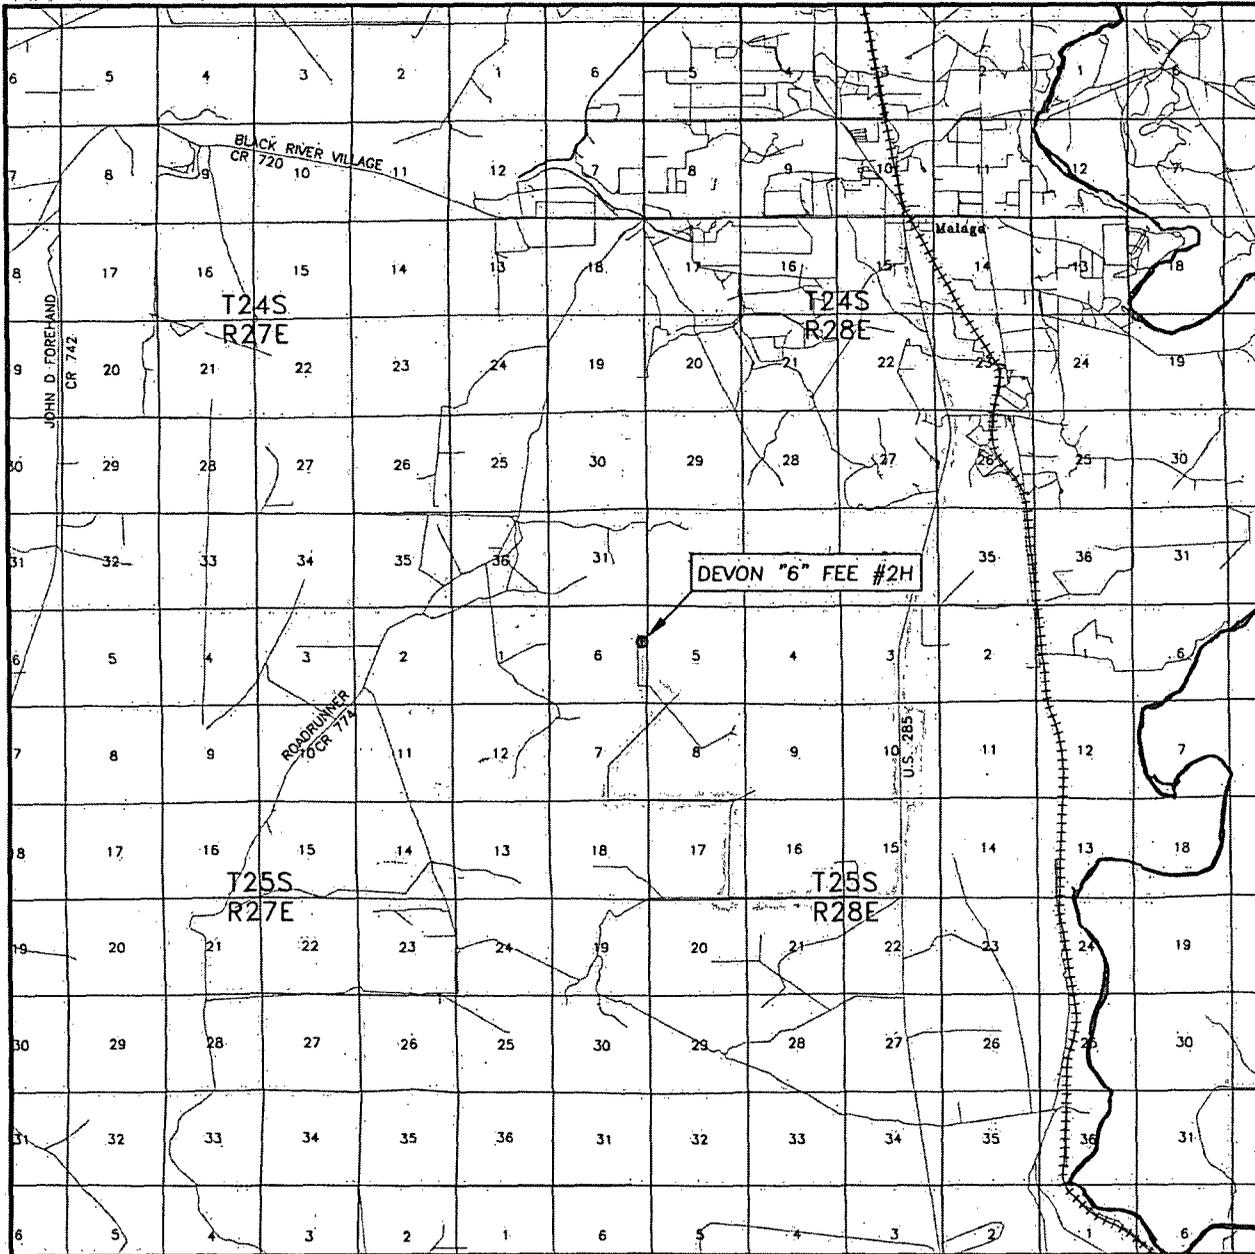


SEC. 6 TWP. 25-S RGE. 28-E
 SURVEY N.M.P.M.
 COUNTY EDDY
 DESCRIPTION 1980' FNL & 300' FEL
 ELEVATION 3041.8'
 OPERATOR OCCIDENTAL PERMIAN L.P.
 LEASE DEVON "6" FEE #2H

SCALE: 1" = 2 MILES


Asel Surveying

P.O. BOX 393 - 310 W. TAYLOR
 HOBBS, NEW MEXICO - 575-393-9146



DIRECTIONS BEGINNING IN MALAGA AT THE INTERSECTION OF BLACK RIVER VILLAGE ROAD AND U.S. HWY. #285, GO SOUTH ON U.S. HWY. #285 FOR 7.2 MILES, TURN RIGHT ON CALICHE ROAD AND GO WEST FOR 1.8 MILES, TURN RIGHT AND GO NORTH FOR 1.0 MILES, TURN LEFT AND GO WEST FOR 1.3 MILES, TURN RIGHT, AND GO NORTH FOR 0.4 MILES, TURN RIGHT AND GO NORTHEAST FOR 0.9 MILES, TURN LEFT AND GO NORTHWEST FOR 0.3 MILES, GO WEST FOR 0.1 MILES, GO NORTH FOR 0.4 MILES, TURN RIGHT ON PROPOSED ROAD AND GO EAST FOR 46.5 FEET TO LOCATION.

LOCATION VERIFICATION MAP

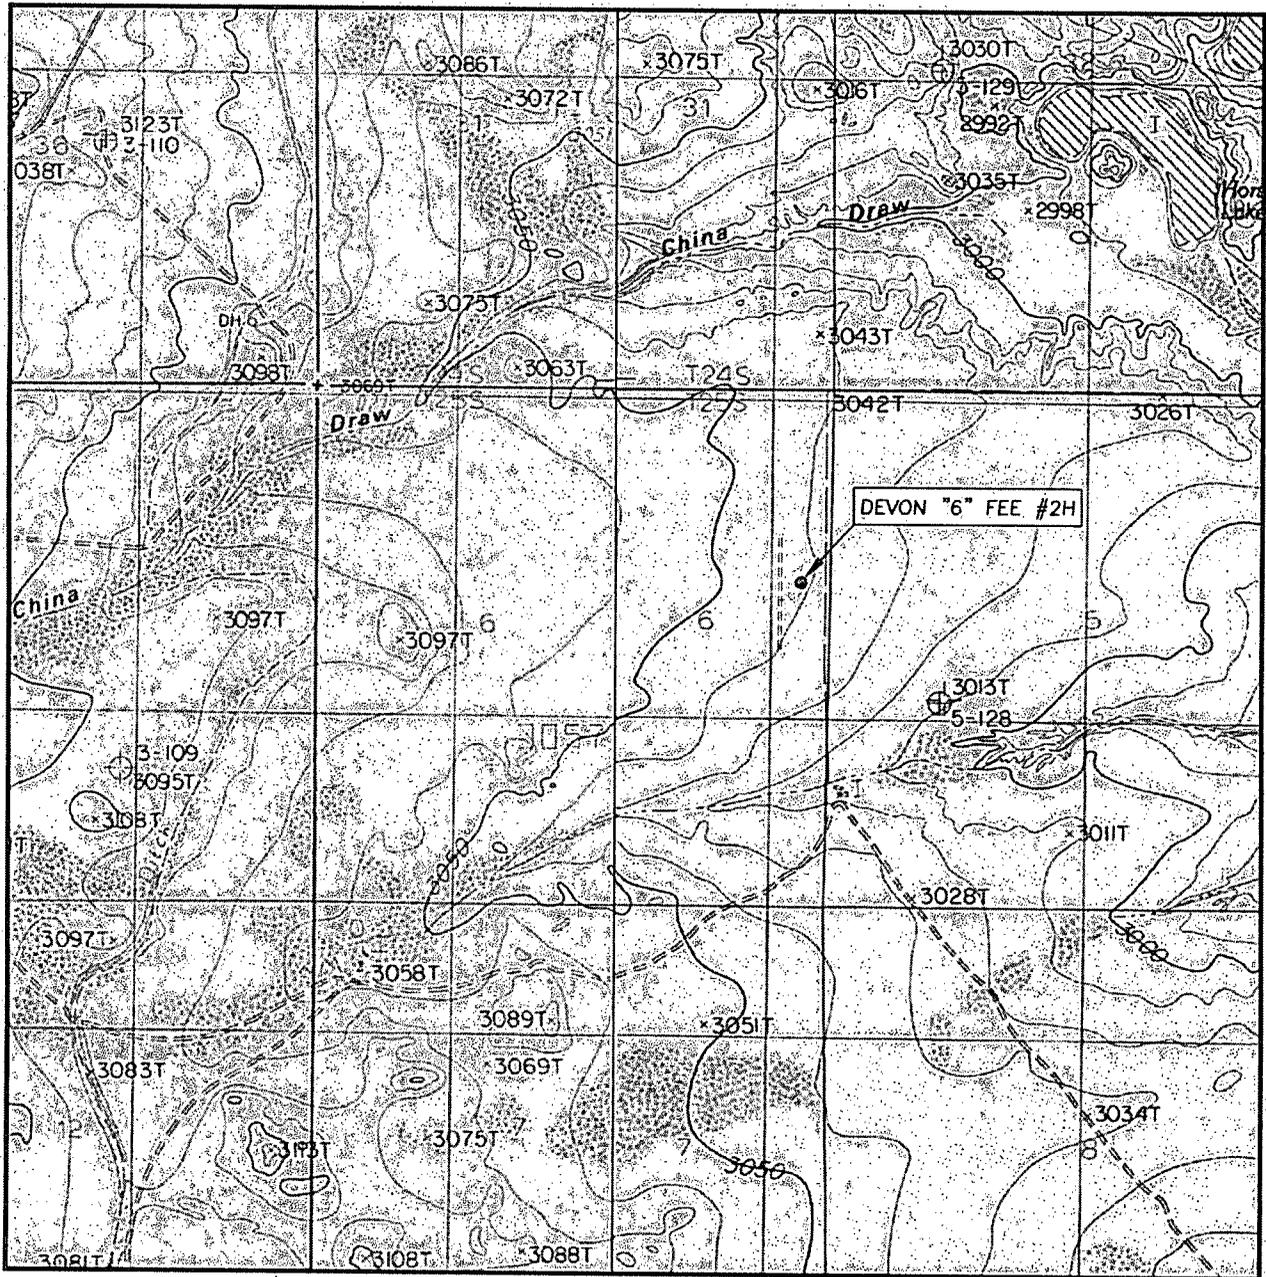

SCALE: 1" = 2000'

CONTOUR INTERVAL: 10'

SEC. 6 TWP. 25-S RGE. 28-E

SURVEY N.M.P.M.

COUNTY EDDY

DESCRIPTION 1980' FNL & 300' FEL

ELEVATION 3041.8'


OPERATOR OCCIDENTAL PERMIAN L.P.

LEASE DEVON "6" FEE #2H


U.S.G.S. TOPOGRAPHIC MAP
MALAGA, N.M.

Asel Surveying

P.O. BOX 393 - 310 W. TAYLOR
HOBBS, NEW MEXICO - 575-393-9146



SECTION 6, TOWNSHIP 25 SOUTH, RANGE 28 EAST, N.M.P.M.,
EDDY COUNTY
NEW MEXICO

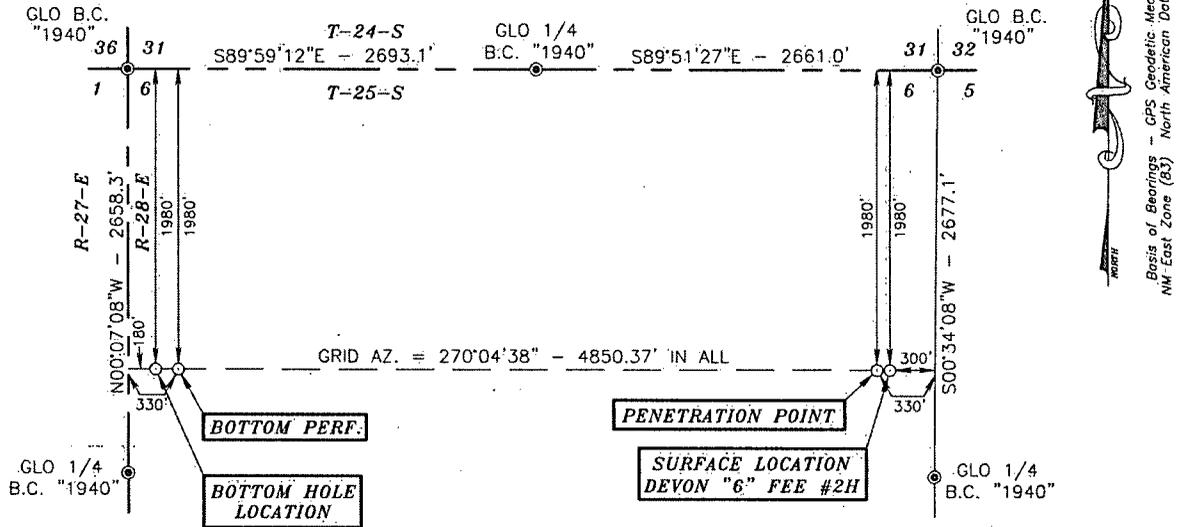

Basis of Bearings - GPS Geodetic Measurements
 NAD 83
 North American Datum of 1983

DRIVING DIRECTIONS:
 BEGINNING IN MALAGA AT THE INTERSECTION
 OF BLACK RIVER VILLAGE ROAD AND U.S.
 HWY. #285, GO SOUTH ON U.S. HWY. #285
 FOR 7.2 MILES, TURN RIGHT ON CALICHE
 ROAD AND GO WEST FOR 1.8 MILES, TURN
 RIGHT AND GO NORTH FOR 1.0 MILES,
 TURN LEFT AND GO WEST FOR 1.3 MILES,
 TURN RIGHT AND GO NORTH FOR 0.4 MILES,
 TURN RIGHT AND GO NORTHEAST FOR 0.9
 MILES, TURN LEFT AND GO NORTHWEST FOR
 0.3 MILES, GO WEST FOR 0.1 MILES, GO
 NORTH FOR 0.4 MILES, TURN RIGHT ON
 PROPOSED ROAD AND GO EAST FOR 46.5
 FEET TO LOCATION.



SURVEYORS CERTIFICATE
 I, TERRY J. ASEL, NEW MEXICO PROFESSIONAL SURVEYOR
 NO. 15079, DO HEREBY CERTIFY THAT I CONDUCTED AND AM
 RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS
 TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND
 BELIEF, AND MEETS THE "MINIMUM STANDARDS FOR
 SURVEYING IN NEW MEXICO" AS ADOPTED BY THE NEW
 MEXICO STATE BOARD OF REGISTRATION FOR
 PROFESSIONAL ENGINEERS AND SURVEYORS.

Terry J. Asel 1/7/2015
 Terry J. Asel, N.M. R.P.L.S. No. 15079


Asel Surveying

P.O. BOX 393 - 310 W. TAYLOR
 HOBBS, NEW MEXICO 78301-0393-9146



LEGEND


⊙ - DENOTES FOUND MONUMENT AS NOTED





OCCIDENTAL PERMIAN L.P.

DEVON "6" FEE #2H LOCATED AT
 1980' FNL & 300' FEL IN SECTION 6,
 TOWNSHIP 25 SOUTH, RANGE 28 EAST,
 N.M.P.M., EDDY COUNTY, NEW MEXICO

Survey Date: 03/13/14	Sheet 1 of 1 Sheets
W.O. Number: 140313WL-6 (Rev. A)	Drawn By: KA Rev. A
Date: 01/06/15	140313WL-6 Scale: 1"=1000'

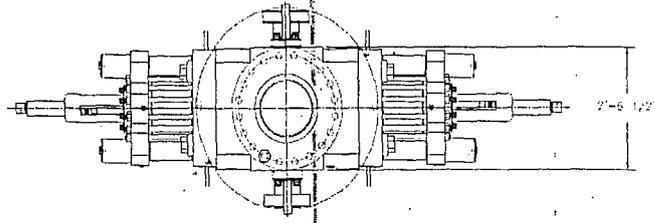

- LEGEND**
- ① - 4 1/16"-10M FLANGED END RATE VALVE
 - ② - 4 1/16"-10M FLANGED END RATE VALVE WITH DOUBLE-ACTING HYDRAULIC ACTUATOR
 - ③ - 2 1/16"-10M FLANGED END RATE VALVE
 - ④ - 2 1/16"-10M FLANGED END CHECK VALVE
 - ⑤ - DOUBLE STUDDED FLANGES

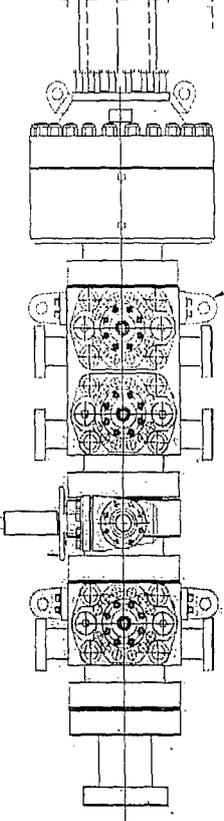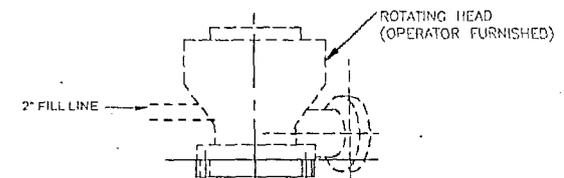


ISSUED FOR FABRICATION
December-18-2007
DRAFTSMAN _____
ENGINEER _____

SHAFFER BOLTED-OVER CHERICAL ANNULAR PREVENTER (API 16A MONOGRAMMED, 13 5/8"-10M WP), WITH BOTTOM FLANGE + 1" STUDDED TOP (WEIGHT = 14,500 LBS WITH SHAFFER API 16A HOT OIL RESISTANT ACRYLONITRILE ELEMENT)

CAMERON 10M DOUBLE RAM-TYPE PREVENTER (API 16A MONOGRAMMED, 13 5/8"-10M WP), WITH 5" CAMERON PIPE RAMS (CAMRAM FRONT WALKERS & TOP SEALS) IN TOP CAVITY AND CAMERON DS SHEARING BLIND RAMS IN BOTTOM CAVITY. BOTTOM FLANGE + STUDDED TOP (WEIGHT = 21,100 LBS. WITH RAMS)

13 5/8"-10M WP CAMERON DRILLING SPOOL (API 16A MONOGRAMMED), STUDDED TOP + FLANGED BOTTOM, WITH 4 1/16"-10M WP FLANGED OUTLETS (WEIGHT APPROXIMATELY 8,000 LBS)

CAMERON 10M SINGLE RAM-TYPE PREVENTER (API 16A MONOGRAMMED, 13 5/8"-10M WP), WITH 5" CAMERON PIPE RAMS (CAMRAM FRONT WALKERS & TOP SEALS)-BOTTOM FLANGES, STUDDED TOP (WEIGHT = 10,900 LBS)

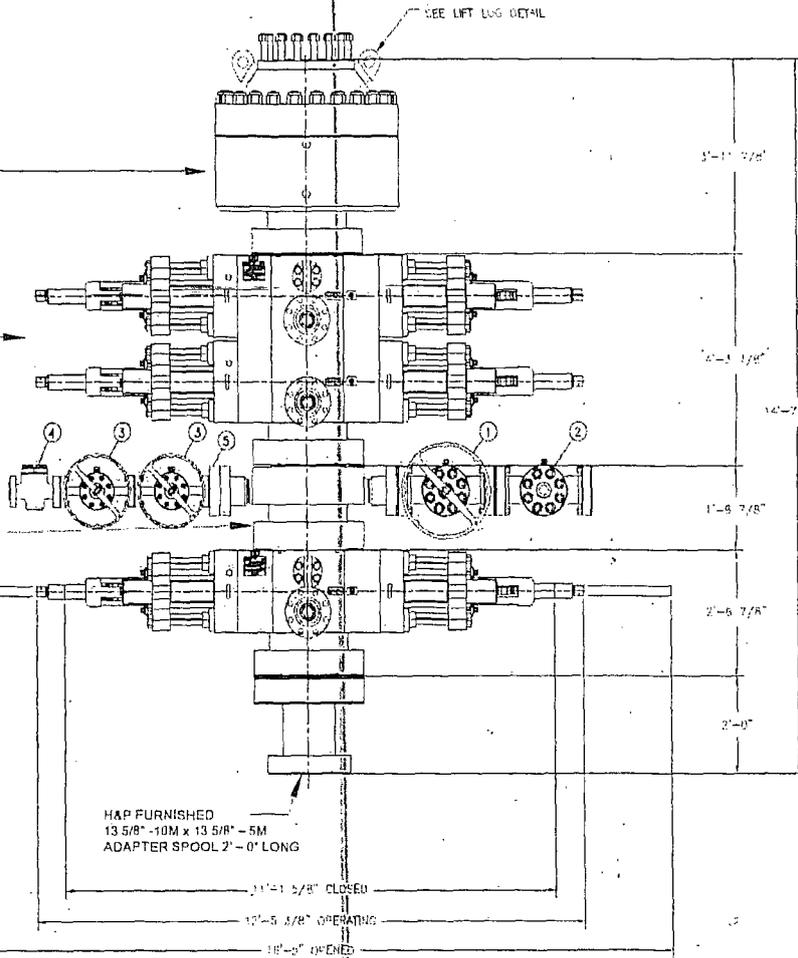

API 16A MONOGRAMMED CAMERON, CHOKER AND KILL MING VALVE ASSEMBLIES ARE NOT SHOWN FOR CLARITY

HEIGHTS DO NOT INCLUDE HOSES, ADAPTER, SPOOLS OR QUICK CONNECT FITTINGS

PROPRIETARY

THIS DRAWING AND THE IDEAS AND INFORMATION INCLUDED IN THIS DRAWING ARE PROPRIETARY AND ARE NOT TO BE REPRODUCED, DISSEMINATED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF A DULY AUTHORIZED OFFICER OF HELMERICH & PAYNE INTERNATIONAL DRILLING CO.

**13 5/8 - 10M BOP STACK
WITH 13 5/8 - 5M ANNULAR**

HELMERICH & PAYNE INTERNATIONAL DRILLING CO.

TITLE: 13 5/8"-10M BOP 3 RAM STACK FLEXRIG3

ENGINEERING APPROVAL	DATE	TITLE
	12/18/07	ADDED SHEET 01
	4-10-07	CAMERON RAMS DOUBLE STUDDED ADAPTER SPOOLS 2'-0" AND 13 5/8" LONG WERE ADDED
	4-20-07	ADDED 10" SPACER ADAPTER SPOOLS
	07-07-02	ADDED ADAPTER SPOOLS
	06-13-02	COMPLETED BOP STACK
REV	DATE	DESCRIPTION


CUSTOMER: HAP

PROJECT: FLEXRIG3

DRAWN: MTS DATE: 06-05-02 DRG. NO.: 210-P1-07

SCALE: 1/4"=1'-0" SHEET: 1 OF 2

ROP - 1

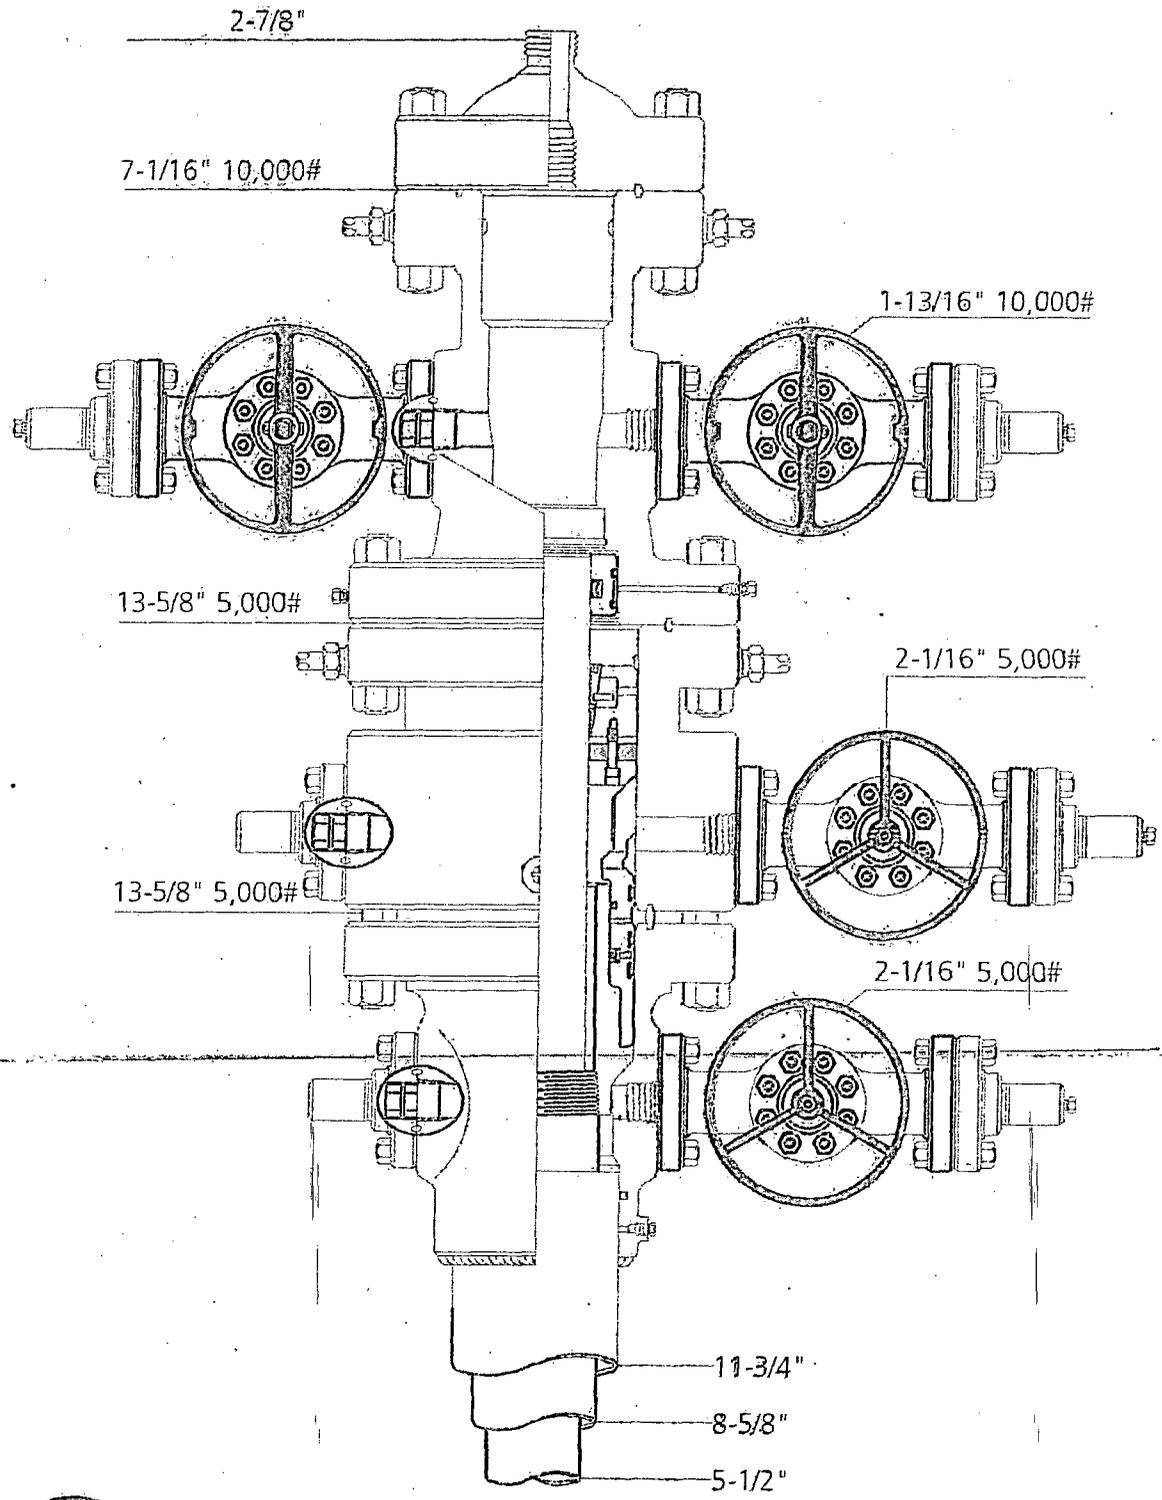


Permian Basin
MBS




NAME: Jeanette	DATE: 1-31-13	FROM: JG/MS/AG	# 21073221
----------------	---------------	----------------	------------

FLEX3 STD CHOKE MANIFOLD (COMPREHENSIVE)

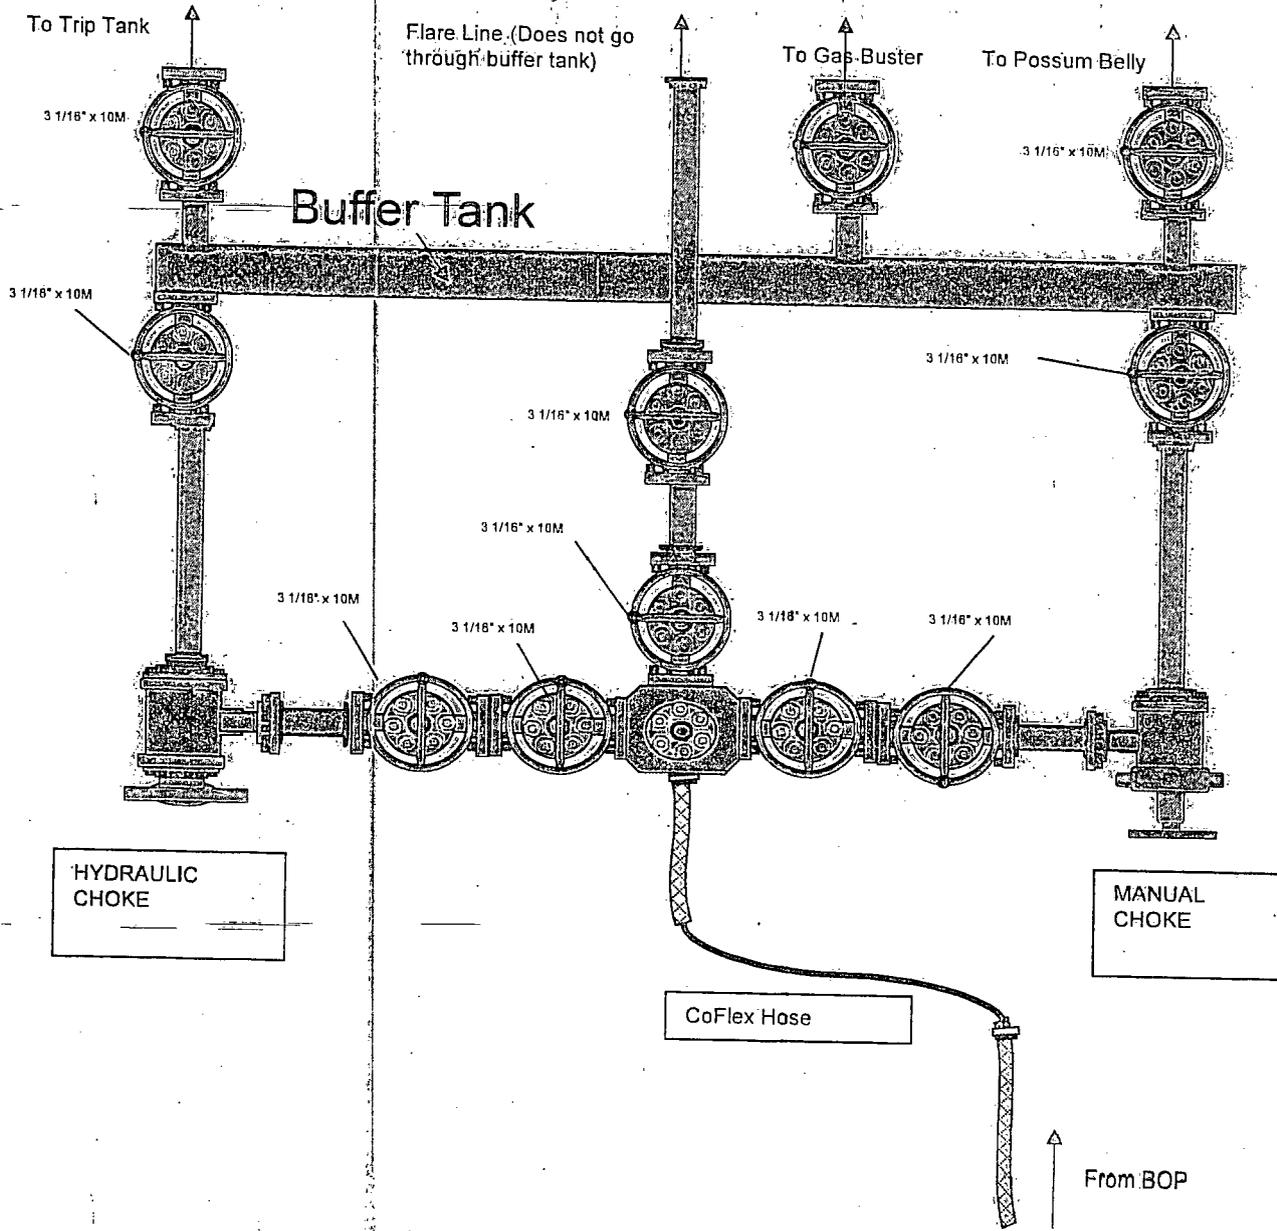


10M REMOTE KILL LINE SCHEMATIC

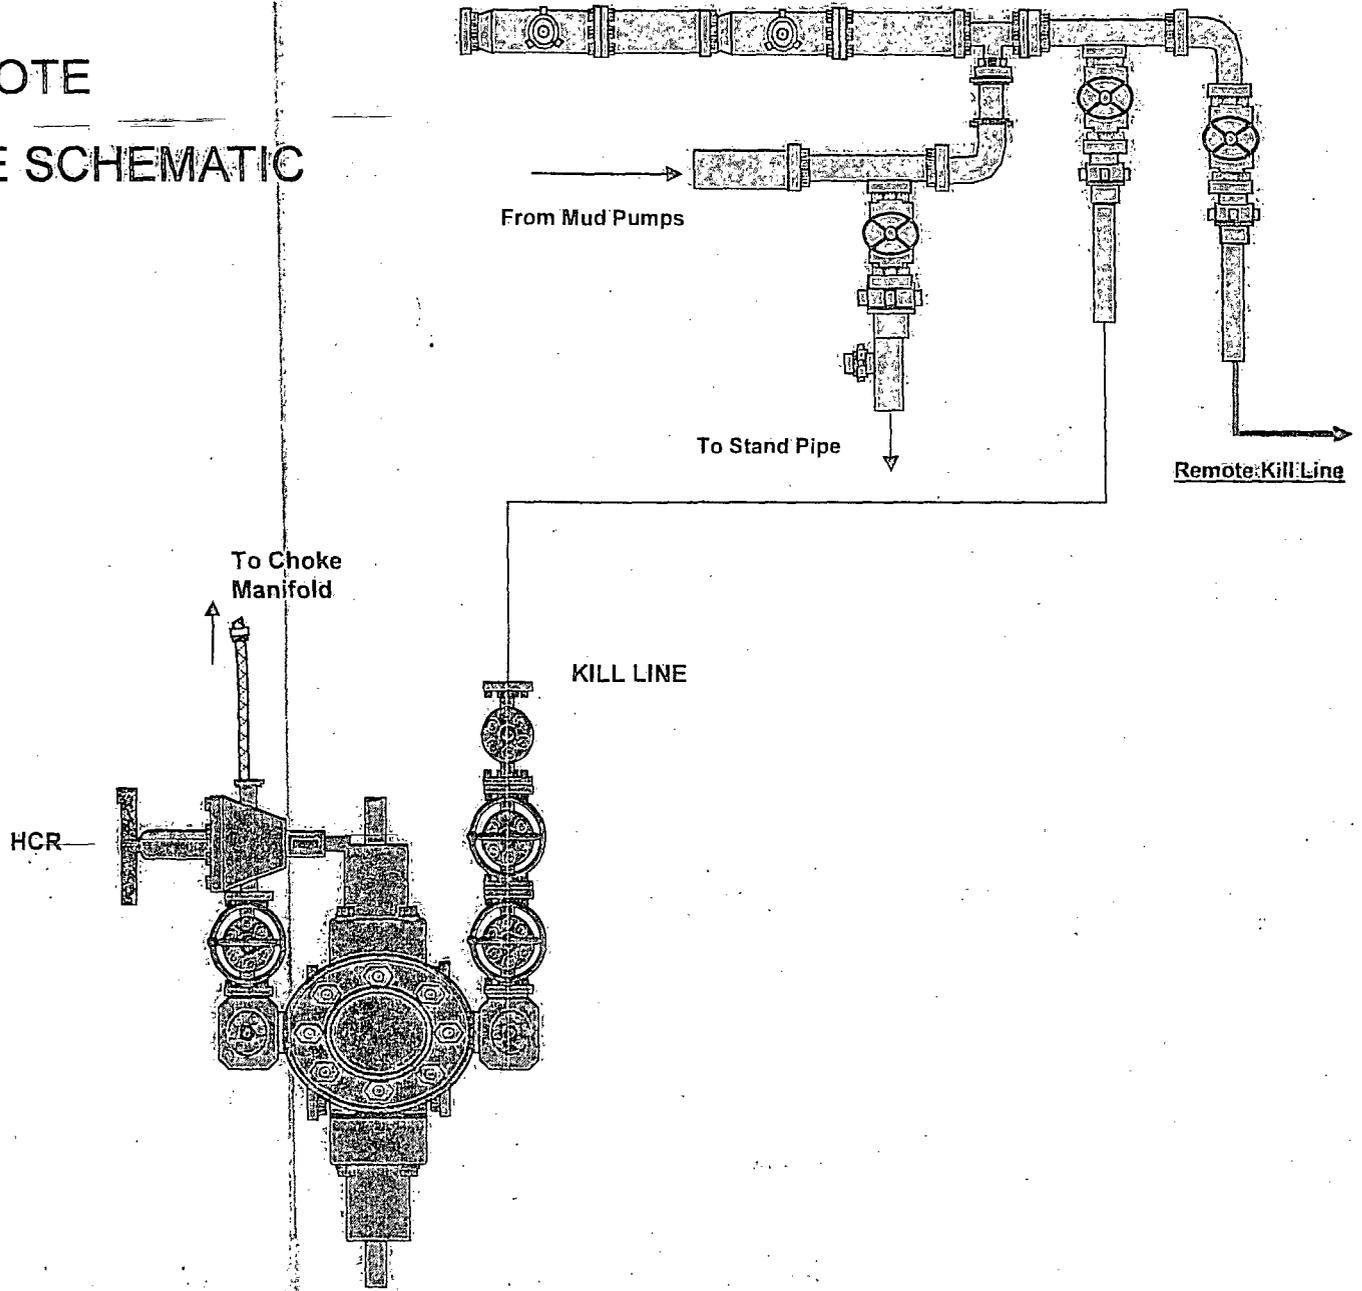


CM-2


Choke Manifold – Gas Separator (Top View)

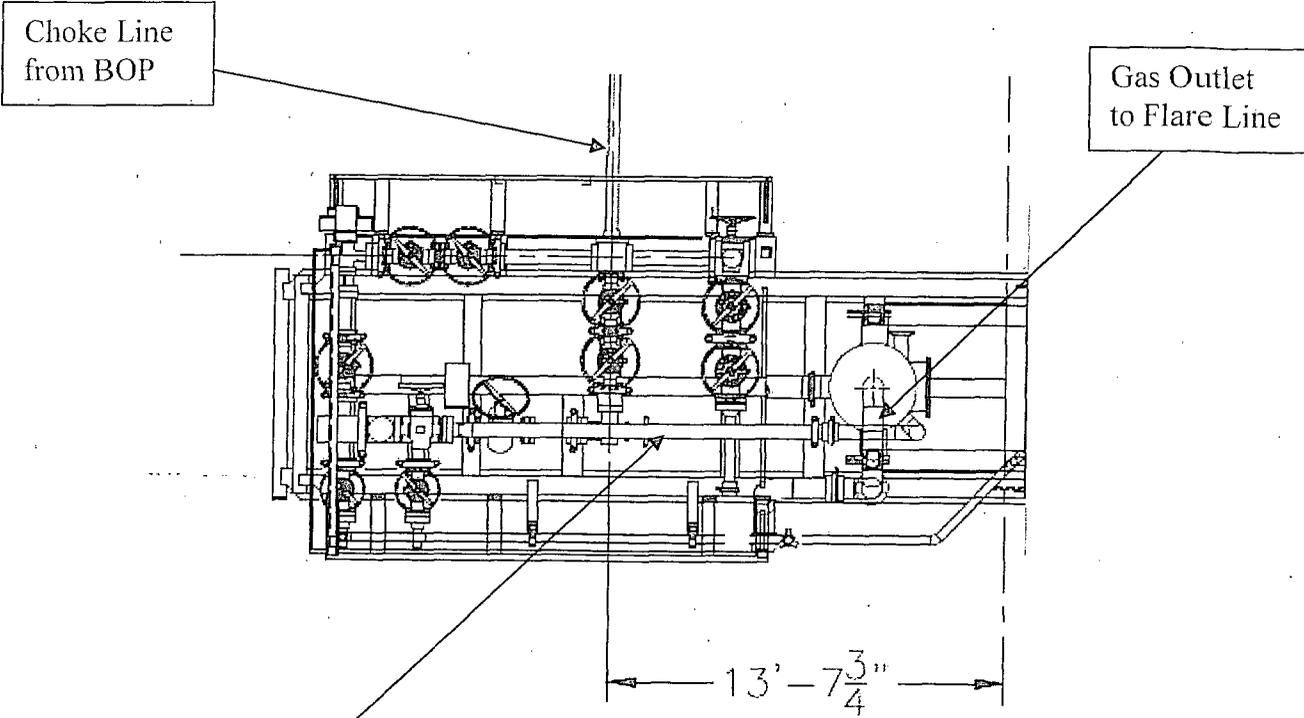

Choke Manifold – Gas Separator (Side View)

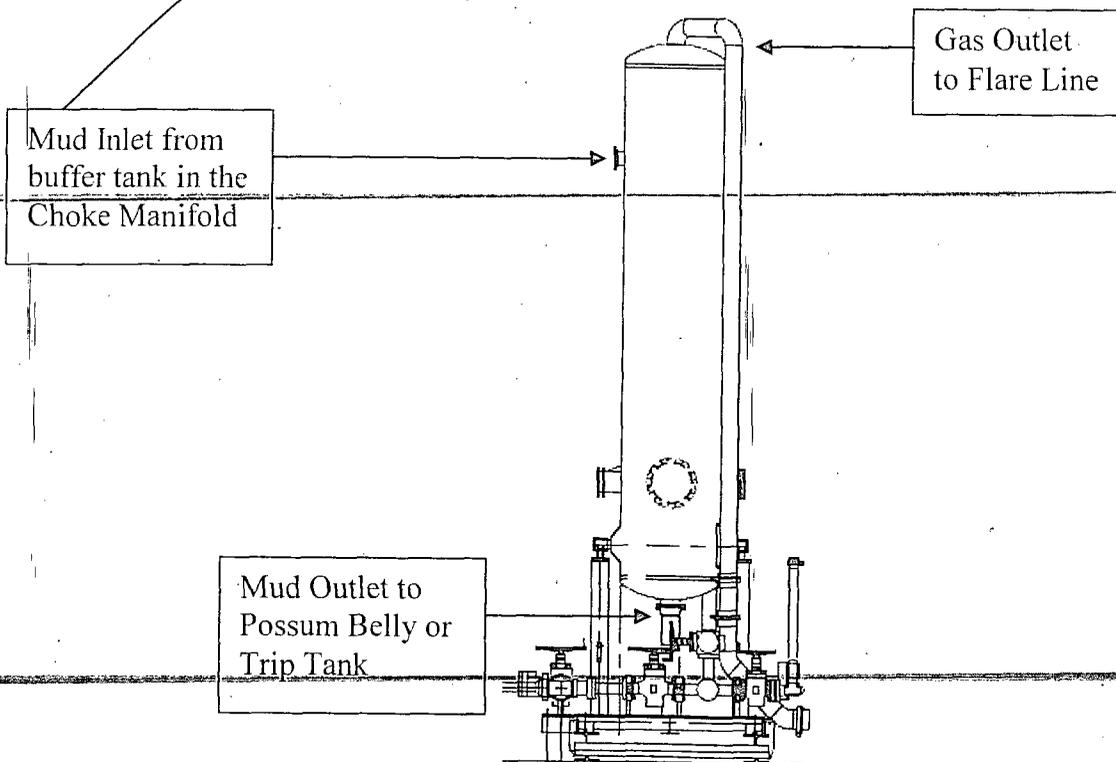


Gas Separator Routing Flex III Rigs

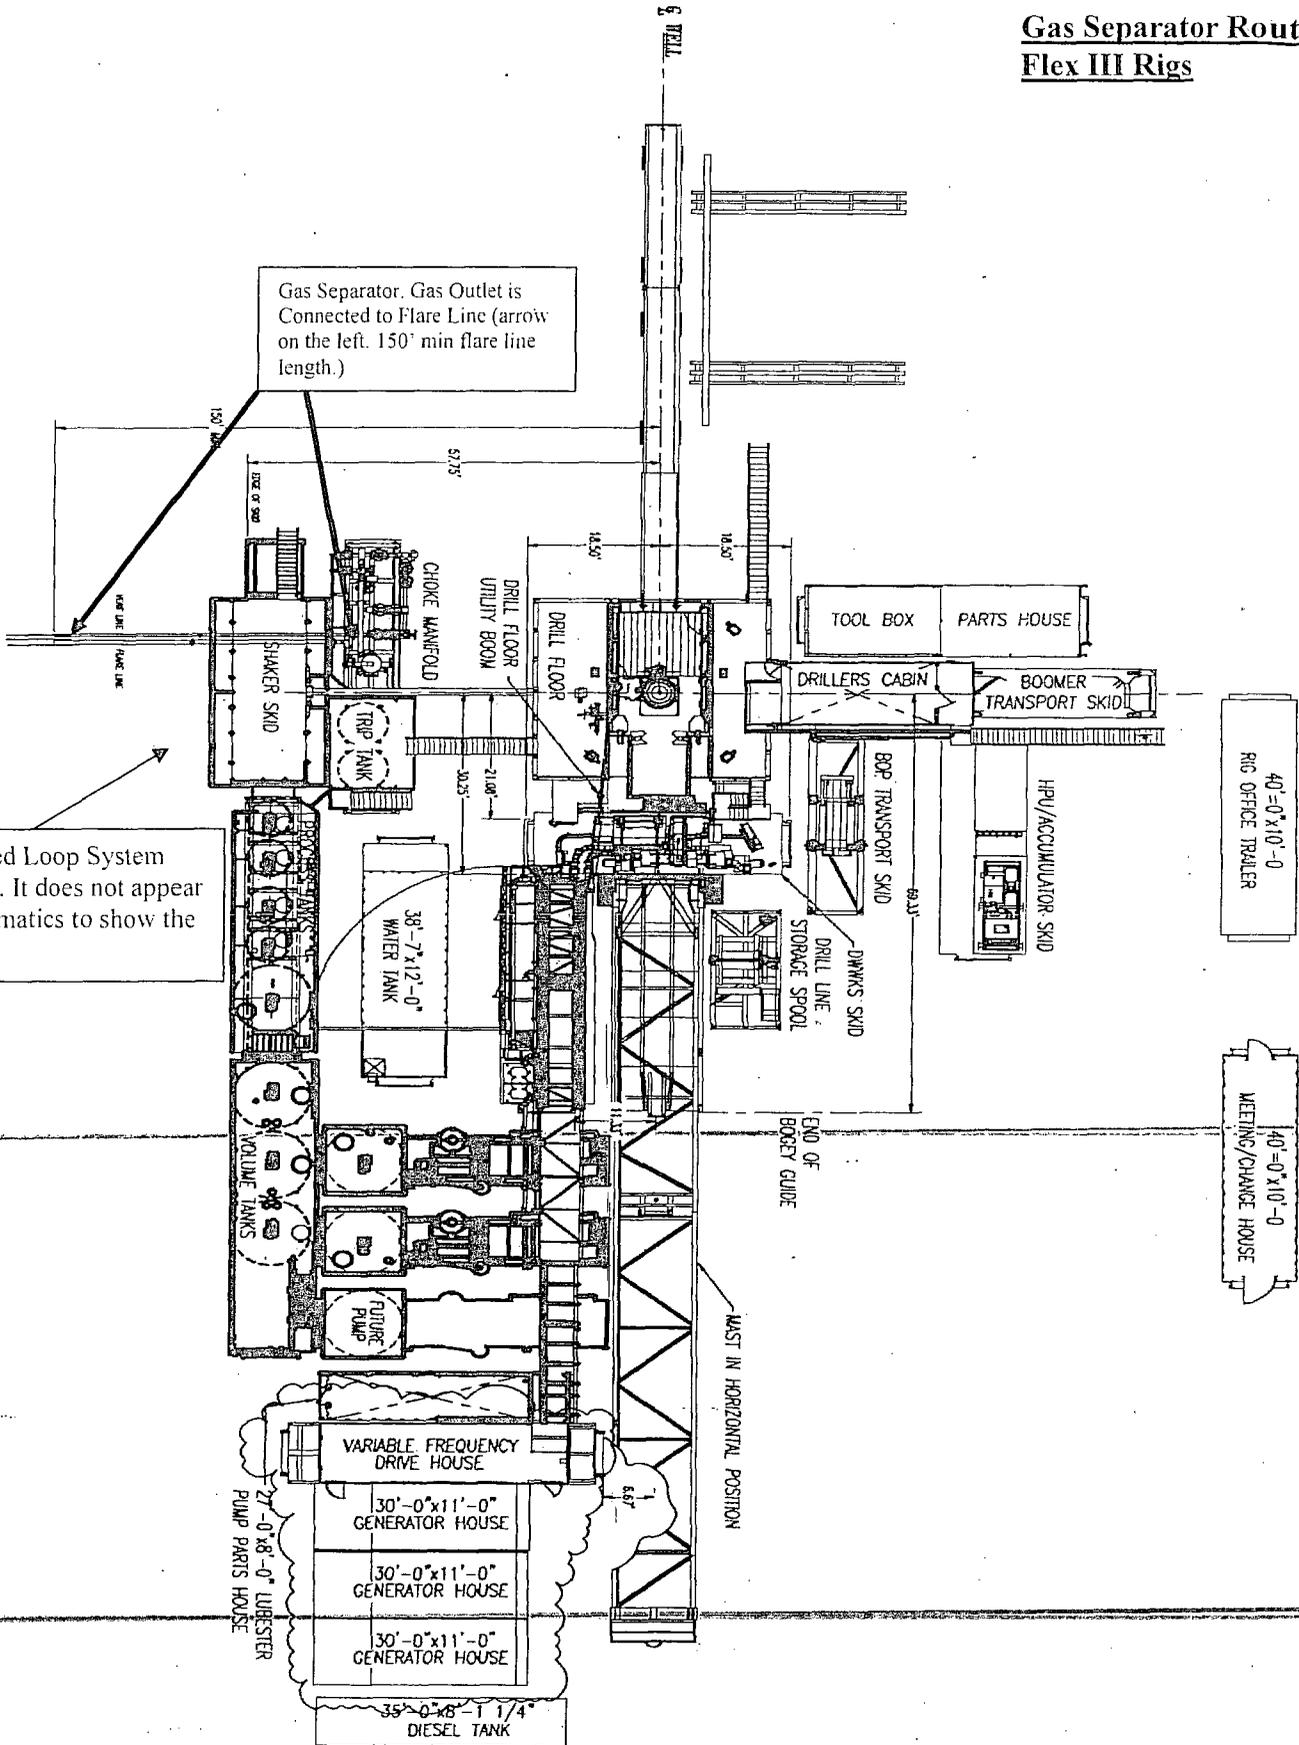



Gas Separator. Gas Outlet is Connected to Flare Line (arrow on the left. 150' min flare line length.)

Note: Closed Loop System placed here. It does not appear on the schematics to show the flare line.


Oxy Single Centrifuge
Closed Loop System – New
Mexico Flex III
May 28, 2013

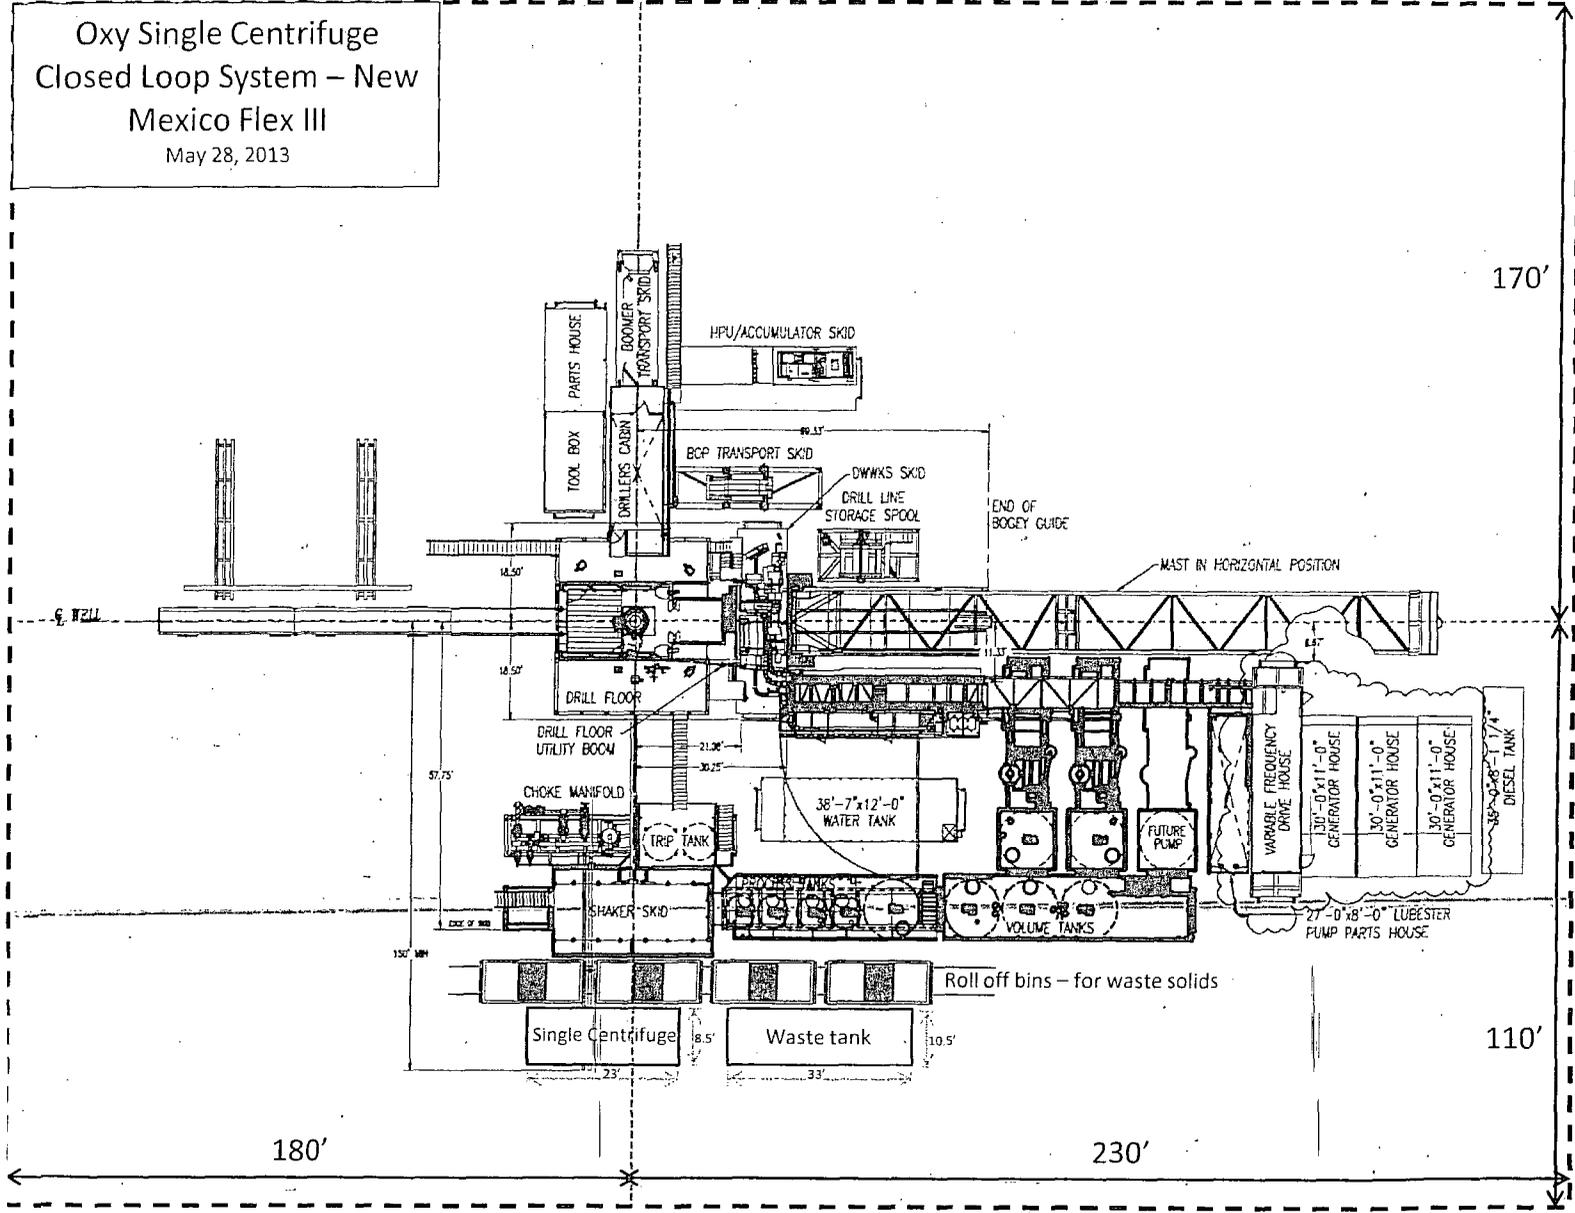

Oxy

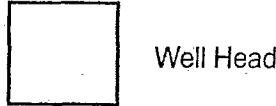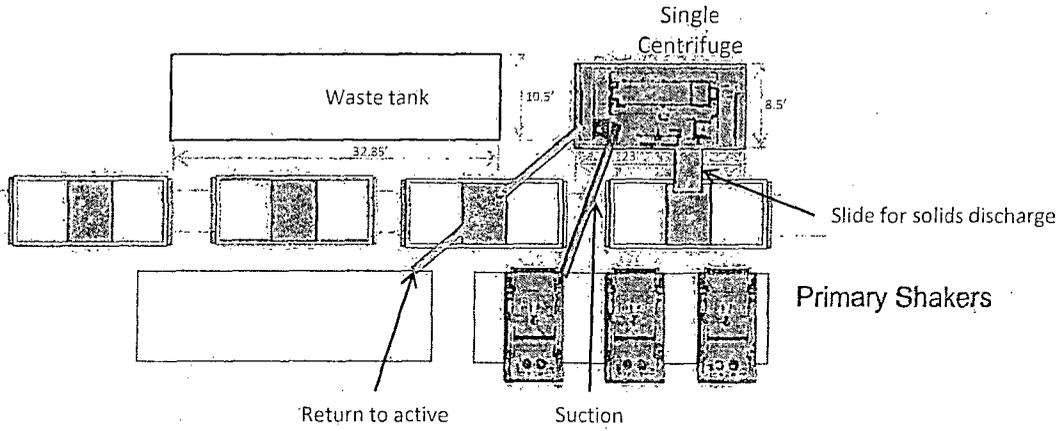

Oxy Single Centrifuge
Closed Loop System – New
Mexico Flex III
May 28, 2013

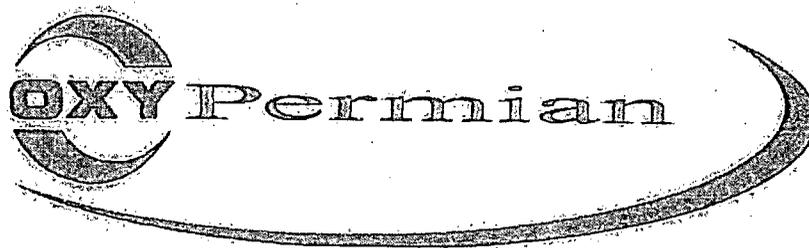

Permian Drilling Hydrogen Sulfide Drilling Operations Plan New Mexico

Scope

This contingency plan establishes guidelines for the public, all company employees, and contract employees who's work activities may involve exposure to hydrogen sulfide (H₂S) gas.

While drilling this well, it is possible to encounter H₂S bearing formations. At all times, the first barrier to control H₂S emissions will be the drilling fluid, which will have a density high enough to control influx.

Objective

1. Provide an immediate and predetermined response plan to any condition when H₂S is detected. All H₂S detections in excess of 10 parts per million (ppm) concentration are considered an Emergency.
2. Prevent any and all accidents, and prevent the uncontrolled release of hydrogen sulfide into the atmosphere.
3. Provide proper evacuation procedures to cope with emergencies.
4. Provide immediate and adequate medical attention should an injury occur.

Discussion

Implementation:	This plan with all details is to be fully implemented before drilling to <u>commence</u> .
Emergency response Procedure:	This section outlines the conditions and denotes steps to be taken in the event of an emergency.
Emergency equipment Procedure:	This section outlines the safety and emergency equipment that will be required for the drilling of this well.
Training provisions:	This section outlines the training provisions that must be adhered to prior to drilling.
Drilling emergency call lists:	Included are the telephone numbers of all persons to be contacted should an emergency exist.
Briefing:	This section deals with the briefing of all people involved in the drilling operation.
Public safety:	Public safety personnel will be made aware of any potential evacuation and any additional support needed.
Check lists:	Status check lists and procedural check lists have been included to insure adherence to the plan.
General information:	A general information section has been included to supply support information.

Hydrogen Sulfide Training

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on the well:

1. The hazards and characteristics of H₂S.
2. Proper use and maintenance of personal protective equipment and life support systems.
3. H₂S detection.
4. Proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures and prevailing winds.
5. Proper techniques for first aid and rescue procedures.
6. Physical effects of hydrogen sulfide on the human body.
7. Toxicity of hydrogen sulfide and sulfur dioxide.
8. Use of SCBA and supplied air equipment.
9. First aid and artificial respiration.
10. Emergency rescue.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H₂S on metal components. If high tensile strength tubular is to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling a well, blowout prevention and well control procedures.
3. The contents and requirements of the H₂S Drilling Operations Plan.

H₂S training refresher must have been taken within one year prior to drilling the well.

~~Specifics on the well to be drilled will be discussed during the pre-spud meeting. H₂S and well control (choke) drills will be performed while drilling the well, at least on a weekly basis. This plan shall be available in the well site. All personnel will be required to carry the documentation proving that the H₂S training has been taken.~~

Service company and visiting personnel

- A. Each service company that will be on this well will be notified if the zone contains H₂S.
- B. Each service company must provide for the training and equipment of their employees before they arrive at the well site.
- C. Each service company will be expected to attend a well site briefing

Emergency Equipment Requirements

1. Well control equipment

The well shall have hydraulic BOP equipment for the anticipated pressures. Equipment is to be tested on installation and follow Oxy Well Control standard, as well as BLM Onshore Order #2.

Special control equipment:

- A. Hydraulic BOP equipment with remote control on ground. Remotely operated choke.
- B. Rotating head
- C. Gas buster equipment shall be installed before drilling out of surface pipe.

2. Protective equipment for personnel

- A. Four (4) 30-minute positive pressure air packs (2 at each briefing area) on location.
- B. Adequate fire extinguishers shall be located at strategic locations.
- C. Radio / cell telephone communication will be available at the rig.
 - Rig floor and trailers.
 - Vehicle.

3. Hydrogen sulfide sensors and alarms

- A. H₂S sensor with alarms will be located on the rig floor, at the bell nipple, and at the flow line. These monitors will be set to alarm at 10 ppm with strobe light, and audible alarm.
- B. Hand operated detectors with tubes.
- C. H₂S monitor tester (to be provided by contract Safety Company.)
- D. There shall be one combustible gas detector on location at all times.

4. Visual Warning Systems

- A. One sign located at each location entrance with the following language:

Caution – potential poison gas
Hydrogen sulfide
No admittance without authorization

Wind sock – wind streamers:

- A. One 36" (in length) wind sock located at protection center, at height visible from rig floor.
- B. One 36" (in length) wind sock located at height visible from pit areas.

Condition flags

- A. One each condition flag to be displayed to denote conditions.

green – normal conditions

yellow – potential danger

red – danger, H2S present

- B. Condition flag shall be posted at each location sign entrance.

5. Mud Program

The mud program is designed to minimize the risk of having H2S and other formation fluids at surface. Proper mud weight and safe drilling practices will be applied. H2S scavengers will be used to minimize the hazards while drilling. Below is a summary of the drilling program.

Mud inspection devices:

Garrett gas train or hatch tester for inspection of sulfide concentration in mud system.

6. Metallurgy

- A. Drill string, casing, tubing, wellhead, blowout preventers, drilling spools or adapters, kill lines, choke manifold, lines and valves shall be suitable for the H2S service.
- B. All the elastomers, packing, seals and ring gaskets shall be suitable for H2S service.

7. Well Testing

No drill stem test will be performed on this well.

8. Evacuation plan

Evacuation routes should be established prior to well spud for each well and discussed with all rig personnel.

9. Designated area
- A. Parking and visitor area: all vehicles are to be parked at a predetermined safe distance from the wellhead.
 - B. There will be a designated smoking area.
 - C. Two briefing areas on either side of the location at the maximum allowable distance from the well bore so they offset prevailing winds perpendicularly, or at a 45-degree angle if wind direction tends to shift in the area.

Emergency procedures

- A. In the event of any evidence of H₂S level above 10 ppm, take the following steps:
- 1. The Driller will pick up off bottom, shut down the pumps, slow down the pipe rotation.
 - 2. Secure and don escape breathing equipment, report to the upwind designated safe briefing / muster area.
 - 3. All personnel on location will be accounted for and emergency search should begin for any missing, the Buddy System will be implemented.
 - 4. Order non-essential personnel to leave the well site, order all essential personnel out of the danger zone and upwind to the nearest designated safe briefing / muster area.
 - 5. Entrance to the location will be secured to a higher level than our usual "Meet and Greet" requirement, and the proper condition flag will be displayed at the entrance to the location.
 - 6. Take steps to determine if the H₂S level can be corrected or suppressed and, if so, proceed as required.
- B. If uncontrollable conditions occur:
- 1. Take steps to protect and/or remove any public in the down-wind area from the rig – partial evacuation and isolation. Notify necessary public safety personnel and appropriate regulatory entities (i.e. BLM) of the situation.

- 2. Remove all personnel to the nearest upwind designated safe briefing / muster area or off location.
- 3. Notify public safety personnel of safe briefing / muster area.
- 4. An assigned crew member will blockade the entrance to the location. No unauthorized personnel will be allowed entry to the location.
- 5. Proceed with best plan (at the time) to regain control of the well. Maintain tight security and safety procedures.

C. Responsibility:

- 1. Designated personnel.
 - a. Shall be responsible for the total implementation of this plan.
 - b. Shall be in complete command during any emergency.
 - c. Shall designate a back-up.

- All personnel:
- 1. On alarm, don escape unit and report to the nearest upwind designated safe briefing / muster area upw
 - 2. Check status of personnel (buddy system).
 - 3. Secure breathing equipment.
 - 4. Await orders from supervisor.

- Drill site manager:
- 1. Don escape unit if necessary and report to nearest upwind designated safe briefing / muster area.
 - 2. Coordinate preparations of individuals to return to point of release with tool pusher and driller (using the buddy system).
 - 3. Determine H2S concentrations.
 - 4. Assess situation and take control measures.

- Tool pusher:
- 1. Don escape unit Report to up nearest upwind designated safe briefing / muster area.
 - 2. Coordinate preparation of individuals to return to point of release with tool pusher drill site manager (using the buddy system).
 - 3. Determine H2S concentration.
 - 4. Assess situation and take control measures.

- Driller:
- 1. Don escape unit, shut down pumps, continue

- rotating DP.
2. Check monitor for point of release.
 3. Report to nearest upwind designated safe briefing / muster area.
 4. Check status of personnel (in an attempt to rescue, use the buddy system).
 5. Assigns least essential person to notify Drill Site Manager and tool pusher by quickest means in case of their absence.
 6. Assumes the responsibilities of the Drill Site Manager and tool pusher until they arrive should they be absent.
- Derrick man
Floor man #1
Floor man #2
1. Will remain in briefing / muster area until instructed by supervisor.
- Mud engineer:
1. Report to nearest upwind designated safe briefing / muster area.
 2. When instructed, begin check of mud for pH and H₂S level. (Garett gas train.)
- Safety personnel:
1. Mask up and check status of all personnel and secure operations as instructed by drill site manager.

Taking a kick

When taking a kick during an H₂S emergency, all personnel will follow standard Well control procedures after reporting to briefing area and masking up.

Open-hole logging

All unnecessary personnel off floor. Drill Site Manager and safety personnel should monitor condition, advise status and determine need for use of air equipment.

Running casing or plugging

Following the same "tripping" procedure as above. Drill Site Manager and safety personnel should determine if all personnel have access to protective equipment.

Ignition procedures

The decision to ignite the well is the responsibility of the operator (Oxy Drilling Management). The decision should be made only as a last resort and in a situation where it is clear that:

1. Human life and property are endangered.
2. There is no hope controlling the blowout under the prevailing conditions at the well.

Instructions for igniting the well

1. Two people are required for the actual igniting operation. They must wear self-contained breathing units and have a safety rope attached. One man (tool pusher or safety engineer) will check the atmosphere for explosive gases with the gas monitor. The other man is responsible for igniting the well.
2. Primary method to ignite: 25 mm flare gun with range of approximately 500 feet.
3. Ignite upwind and do not approach any closer than is warranted.
4. Select the ignition site best for protection, and which offers an easy escape route.
5. Before firing, check for presence of combustible gas.
6. After lighting, continue emergency action and procedure as before.
7. All unassigned personnel will remain in briefing area until instructed by supervisor or directed by the Drill Site Manager.

Remember: After well is ignited, burning hydrogen sulfide will convert to sulfur dioxide, which is also highly toxic. **Do not assume the area is safe after the well is ignited.**

Status check list

Note: All items on this list must be completed before drilling to production casing point.

1. H₂S sign at location entrance.
2. Two (2) wind socks located as required.
3. Four (4) 30-minute positive pressure air packs (2 at each Briefing area) on location for all rig personnel and mud loggers.
4. Air packs inspected and ready for use.
5. Cascade system and hose line hook-up as needed.
6. Cascade system for refilling air bottles as needed.
7. Condition flag on location and ready for use.
8. H₂S detection system hooked up and tested.
9. H₂S alarm system hooked up and tested.
10. Hand operated H₂S detector with tubes on location.
11. 1 – 100' length of nylon rope on location.
12. All rig crew and supervisors trained as required.

13. All outside service contractors advised of potential H₂S hazard on well.
14. No smoking sign posted and a designated smoking area identified.
15. Calibration of all H₂S equipment shall be noted on the IADC report.

Checked by: _____ Date: _____

Procedural check list during H2S events

Perform each tour:

1. Check fire extinguishers to see that they have the proper charge.
2. Check breathing equipment to ensure that it is in proper working order.
3. Make sure all the H2S detection system is operative.

Perform each week:

1. Check each piece of breathing equipment to make sure that demand or forced air regulator is working. This requires that the bottle be opened and the mask assembly be put on tight enough so that when you inhale, you receive air or feel air flow.
2. BOP skills (well control drills).
3. Check supply pressure on BOP accumulator stand by source.
4. Check breathing equipment mask assembly to see that straps are loosened and turned back, ready to put on.
5. Check pressure on breathing equipment air bottles to make sure they are charged to full volume. (Air quality checked for proper air grade "D" before bringing to location)
- ~~6. Confirm pressure on all supply air bottles.~~
7. Perform breathing equipment drills with on-site personnel.
8. Check the following supplies for availability.
 - A. Emergency telephone list.
 - B. Hand operated H2S detectors and tubes.

General evacuation plan

1. When the company approved supervisor (Drill Site Manager, consultant, rig pusher, or driller) determines the H₂S gas cannot be limited to the well location and the public will be involved, he will activate the evacuation plan.
2. Drill Site Manager or designee will notify local government agency that a hazardous condition exists and evacuation needs to be implemented.
3. Company or contractor safety personnel that have been trained in the use of H₂S detection equipment and self-contained breathing equipment will monitor H₂S concentrations, wind directions, and area of exposure. They will delineate the outer perimeter of the hazardous gas area. Extension to the evacuation area will be determined from information gathered.
4. Law enforcement personnel (state police, police dept., fire dept., and sheriff's dept.) Will be called to aid in setting up and maintaining road blocks. Also, they will aid in evacuation of the public if necessary.
5. After the discharge of gas has been controlled, company safety personnel will determine when the area is safe for re-entry.

Important: Law enforcement personnel will not be asked to come into a contaminated area. Their assistance will be limited to uncontaminated areas. Constant radio contact will be maintained with them.

Emergency actions

Well blowout – if emergency

1. Evacuate all personnel to “Safe Briefing / Muster Areas” or off location if needed.
2. If sour gas – evacuate rig personnel.
3. If sour gas – evacuate public within 3000 ft radius of exposure.
4. Don SCBA and shut well in if possible using the buddy system.
5. Notify Drilling Superintendent and call 911 for emergency help (fire dept and ambulance) if needed.
6. Implement the Blowout Contingency Plan, and Drilling Emergency Action Plan.
6. Give first aid as needed.

Person down location/facility

1. If immediately possible, contact 911. Give location and wait for confirmation.
2. Don SCBA and perform rescue operation using buddy system.

Toxic effects of hydrogen sulfide

Hydrogen sulfide is extremely toxic. The acceptable ceiling concentration for eight-hour exposure is 10 ppm, which is .001% by volume. Hydrogen sulfide is heavier than air (specific gravity – 1.192) and colorless. It forms an explosive mixture with air between 4.3 and 46.0 percent by volume. Hydrogen sulfide is almost as toxic as hydrogen cyanide and is between five and six times more toxic than carbon monoxide. Toxicity data for hydrogen sulfide and various other gases are compared in table i. Physical effects at various hydrogen sulfide exposure levels are shown in table ii.

Table i
Toxicity of various gases

Common name	Chemical formula	Specific gravity (sc=1)	Threshold limit (1)	Hazardous limit (2)	Lethal concentration (3)
Hydrogen Cyanide	Hcn	0.94	10 ppm	150 ppm/hr	300 ppm
Hydrogen Sulfide	H ₂ S	1.18	10 ppm	250 ppm/hr	600 ppm
Sulfur Dioxide	So ₂	2.21	5 ppm	-	1000 ppm
Chlorine	Cl ₂	2.45	1 ppm	4 ppm/hr	1000 ppm
Carbon Monoxide	Co	0.97	50 ppm	400 ppm/hr	1000 ppm
Carbon Dioxide	Co ₂	1.52	5000 ppm	5%	10%
Methane	Ch ₄	0.55	90,000 ppm	Combustible above 5% in air	

- 1) threshold limit – concentration at which it is believed that all workers may be repeatedly exposed day after day without adverse effects.
- 2) hazardous limit – concentration that will cause death with short-term exposure.
- 3) lethal concentration – concentration that will cause death with short-term exposure.

Toxic effects of hydrogen sulfide

Table ii
Physical effects of hydrogen sulfide

Percent (%)	Ppm	Concentration	Physical effects
		Grains 100 std. Ft ³ *	
0.001	<10	00.65	Obvious and unpleasant odor.

0.002	10	01.30	Safe for 8 hours of exposure.
0.010	100	06.48	Kill smell in 3 - 15 minutes. May sting eyes and throat.
0.020	200	12.96	Kills smell shortly; stings eyes and throat.
0.050	500	32.96	Dizziness; breathing ceases in a few minutes; needs prompt artificial respiration.
0.070	700	45.36	Unconscious quickly; death will result if not rescued promptly.
0.100	1000	64.30	Unconscious at once; followed by death within minutes.

*at 15.00 psia and 60'f.

Use of self-contained breathing equipment (SCBA)

1. Written procedures shall be prepared covering safe use of SCBA's in dangerous atmosphere, which might be encountered in normal operations or in emergencies. Personnel shall be familiar with these procedures and the available SCBA.
2. SCBA's shall be inspected frequently at random to insure that they are properly used, cleaned, and maintained.
3. Anyone who may use the SCBA's shall be trained in how to insure proper face-piece to face seal. They shall wear SCBA's in normal air and then wear them in a test atmosphere. (note: such items as facial hair {beard or sideburns} and eyeglasses will not allow proper seal.) Anyone that may be reasonably expected to wear SCBA's should have these items removed before entering a toxic atmosphere. A special mask must be obtained for anyone who must wear eyeglasses or contact lenses.
4. Maintenance and care of SCBA's:
 - a. A program for maintenance and care of SCBA's shall include the following:
 1. Inspection for defects, including leak checks.
 2. Cleaning and disinfecting.
 3. Repair.
 4. Storage.
 - b. Inspection, self-contained breathing apparatus for emergency use shall be inspected monthly.
 1. Fully charged cylinders.
 2. Regulator and warning device operation.
 3. Condition of face piece and connections.
 4. ~~Rubber parts shall be maintained to keep them pliable and prevent deterioration.~~
 - c. Routinely used SCBA's shall be collected, cleaned and disinfected as frequently as necessary to insure proper protection is provided.
5. Persons assigned tasks that requires use of self-contained breathing equipment shall be certified physically fit (medically cleared) for breathing equipment usage at least annually.
6. SCBA's should be worn when:

A. Any employee works near the top or on top of any tank unless test reveals less than 10 ppm of H2S.

- B. When breaking out any line where H2S can reasonably be expected.
- C. When sampling air in areas to determine if toxic concentrations of H2S exists.
- D. When working in areas where over 10 ppm H2S has been detected.
- E. At any time there is a doubt as to the H2S level in the area to be entered.

Rescue
First aid for H2S poisoning

Do not panic!

Remain calm – think!

1. Don SCBA breathing equipment.
2. Remove victim(s) utilizing buddy system to fresh air as quickly as possible. (go up-wind from source or at right angle to the wind. Not down wind.)
3. Briefly apply chest pressure – arm lift method of artificial respiration to clean the victim’s lungs and to avoid inhaling any toxic gas directly from the victim’s lungs.
4. Provide for prompt transportation to the hospital, and continue giving artificial respiration if needed.
- ~~5. Hospital(s) or medical facilities need to be informed, before-hand, of the possibility of H2S gas poisoning – no matter how remote the possibility is.~~
6. Notify emergency room personnel that the victim(s) has been exposed to H2S gas.

Besides basic first aid, everyone on location should have a good working knowledge of artificial respiration.