

JUL 23 2015

Form 3160-3
(March 2012)

RECEIVED

Carlsbad Field Office
OCD Artesia

ATS-15-278

FORM APPROVED
OMB No. 1004-0137
Expires October 31, 2014

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

HIGH CAVEKARST


APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NM-86540, BHL: NM-13232A
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator CHI OPERATING, INC.		7. If Unit or CA Agreement, Name and No.
3a. Address P. O. BOX 1799 MIDLAND, TEXAS 79702		8. Lease Name and Well No. WINCHESTER FEDERAL COM 1H
3b. Phone No. (include area code) (432) 685-5001 (JOHN QUALLS)		9. API Well No. 30 - 015 - 43260
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface 300 FNL & 330 FEL, SECTION 9 (FIRST TAKE: 330 FSL & 330 FEL SECTION 4) At proposed prod. zone 330 FNL & 330 FEL, SECTION 4		10. Field and Pool, or Exploratory OLD MILLMAN RANCH BONE SPRING
14. Distance in miles and direction from nearest town or post office* 12 MILES NORTHEAST OF CARLSBAD, NM		11. Sec., T. R. M. or Blk. and Survey or Area SHL: SECTION 9, T. 20 S., R. 28 E. BHL: SECTION 4, T. 20 S., R. 28 E.
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) SHL: 300' BHL: 330'	16. No. of acres in lease BHL: 318.23 OTHER: 160	17. Spacing Unit dedicated to this well 159.63
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. SHL: 60' BHL: 990' (3H)	19. Proposed Depth TVD: 7340' MD: 12,287.06'	20. BLM/BIA Bond No. on file NM-1616
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3294' GL	22. Approximate date work will start* ASAP	23. Estimated duration 32 DAYS


24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the BLM.

25. Signature 	Name (Printed/Typed) BARRY W. HUNT	Date 11/5/14
---	---------------------------------------	-----------------

Title PERMIT AGENT FOR CHI OPERATING, INC.

Approved by (Signature)  for Steve Coffey	Name (Printed/Typed)	Date JUL 21 2015
---	----------------------	---------------------

Title FIELD MANAGER	Office CARLSBAD FIELD OFFICE
------------------------	---------------------------------

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

APPROVAL FOR TWO YEARS

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.


(Continued on page 2)

*(Instructions on page 2)

Capitan Controlled Water Basin

Approval Subject to General Requirements
& Special Stipulations Attached


SEE ATTACHED FOR
CONDITIONS OF APPROVAL


7/31/2015

CERTIFICATION

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access road proposed herein; that I am familiar with the conditions that presently exist; that I have full knowledge of State and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct, and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or CHI Operating, Inc. am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U. S. C. 1001 for the filing of false statements. Executed this 3rd. day of December 2014.

Signed: _____



Printed Name: Barry Hunt

Position: Agent for CHI Operating, Inc.

Address: 1403 Springs Farm Place, Carlsbad, NM 88220

Telephone: (575) 361-4078

E-mail: specialtpermitting@gmail.com

DISTRICT I
1625 N. French Dr., Hobbs, NM 88240
Phone (575) 393-8161 Fax: (575) 393-0720

DISTRICT II
811 S. First St., Artesia, NM 88210
Phone (575) 748-1283 Fax: (575) 748-9720

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone (505) 476-3480 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-102
Revised August 1, 2011

Submit one copy to appropriate
District Office

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

WELL LOCATION AND ACREAGE DEDICATION PLAT

☐ AMENDED REPORT

API Number 30-015-43260	Pool Code 48035	Pool Name Old Millman Ranch; Bone-Spring
Property Code 315068	Property Name WINCHESTER FEDERAL COM	Well Number 1H
OGRID No. 04378	Operator Name CHI ENERGY, INCORPORATED	Elevation 3294

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	USat from the	North/South line	USat from the	East/West line	County
A	9	20 S	28 E		300	NORTH	330	EAST	EDDY


Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	USat from the	North/South line	USat from the	East/West line	County
1	4	20 S	28 E		330	NORTH	330	EAST	EDDY
Dedicated Acres 159.63	Joint or Infill	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION


<p>N: 585641.9 E: 585202.1 (NAD83)</p> <p>N: 580356.6 E: 585185.8 (NAD83)</p> <p>N: 575064.0 E: 585099.1 (NAD83)</p>	<p>N: 585656.4 E: 587858.7 (NAD83)</p> <p>N: 580373.7 E: 587849.4 (NAD83)</p> <p>N: 575097.2 E: 590435.8 (NAD83)</p>	<p>B.H.</p> <p>330'</p> <p>3295.3'</p> <p>3294.6'</p> <p>330'</p>	<p>PROPOSED BOTTOM HOLE LOCATION</p> <p>Lat - N 32°36'32.58"</p> <p>Long - W 104°10'28.91"</p> <p>NMSPCE- N 585339.8 E 590184.7 (NAD-83)</p>	<p>OPERATOR CERTIFICATION</p> <p>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the Division.</p> <p>Signature: <u>Barry W. Hunt</u> Date: <u>12/3/14</u></p> <p>Printed Name: <u>Barry W. Hunt</u></p> <p>Email Address: _____</p>
			<p>SURFACE LOCATION</p> <p>Lat - N 32°35'40.62"</p> <p>Long - W 104°10'29.07"</p> <p>NMSPCE- N 580089.1 E 590179.1 (NAD-83)</p>	<p>SURVEYOR CERTIFICATION</p> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>Date Surveyed: <u>AUGUST 24, 2014</u></p> <p>Signature: <u>[Signature]</u> Seal: <u>7977</u> Professional Surveyor</p> <p>Certification No. <u>Gory Jones 7977</u> State of New Mexico</p> <p>Scale: 1" = 2000' WO Num.: 30876</p>

SECTION 9, TOWNSHIP 20 SOUTH, RANGE 28 EAST, N.M.P.M.,
EDDY COUNTY, NEW MEXICO.

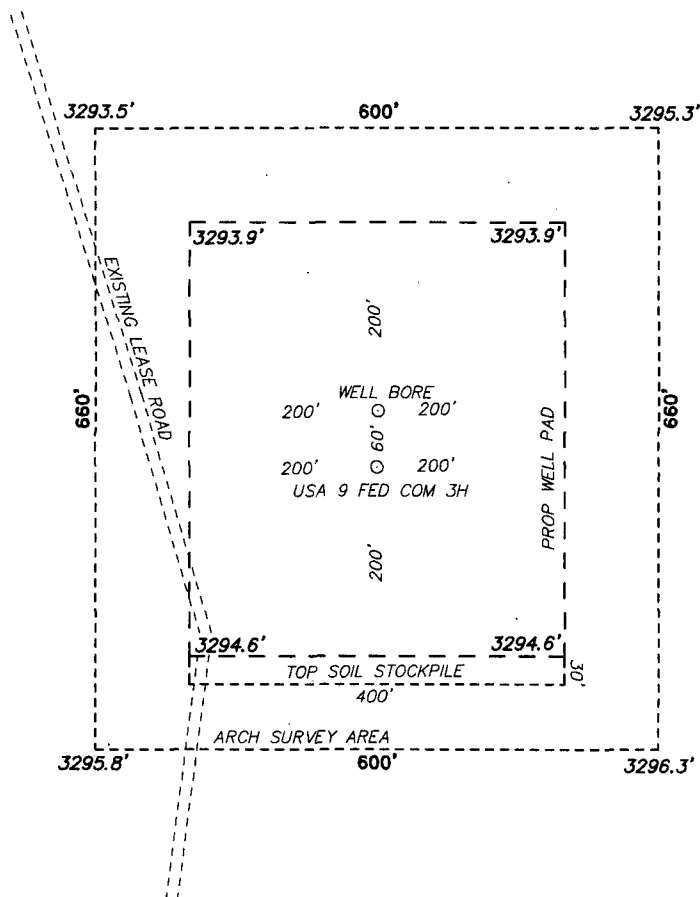

CHI ENERGY, INCORPORATED
WINCHESTER FEDERAL COM 1H
ELEV. - 3294'
Lat - N 32°35'40.62"
Long - W 104°10'29.07"
NMSPEC - N 580089.1
E 590179.1
(NAD-83)

CARLSBAD, NM IS ±18 MILES TO THE SOUTHEAST OF LOCATION.



Directions to Location:

FROM ILLINOIS CAMP ROAD AND BURTON FLATS ROAD
GO RIGHT ON BURTON FLATS ROAD 2.5 MILES, LEFT
0.2 MILES, LEFT 1.5 MILES, AND RIGHT 0.8 MILES
TO PROPOSED LOCATION.





P.O. Box 1786 (575) 393-7316 - Office
1120 N. West County Rd. (575) 392-2206 - Fax
Hobbs, New Mexico 88241 basin-surveys.com

CHI ENERGY, INCORPORATED

REF: WINCHESTER FEDERAL COM 1H / WELL PAD TOPO

THE WINCHESTER FEDERAL COM 1H LOCATED 300' FROM
THE NORTH LINE AND 330' FROM THE EAST LINE OF
SECTION 9, TOWNSHIP 20 SOUTH, RANGE 28 EAST,
N.M.P.M., EDDY COUNTY, NEW MEXICO.

SECTION 9, TOWNSHIP 20 SOUTH, RANGE 28 EAST, N.M.P.M.,
EDDY COUNTY, NEW MEXICO.

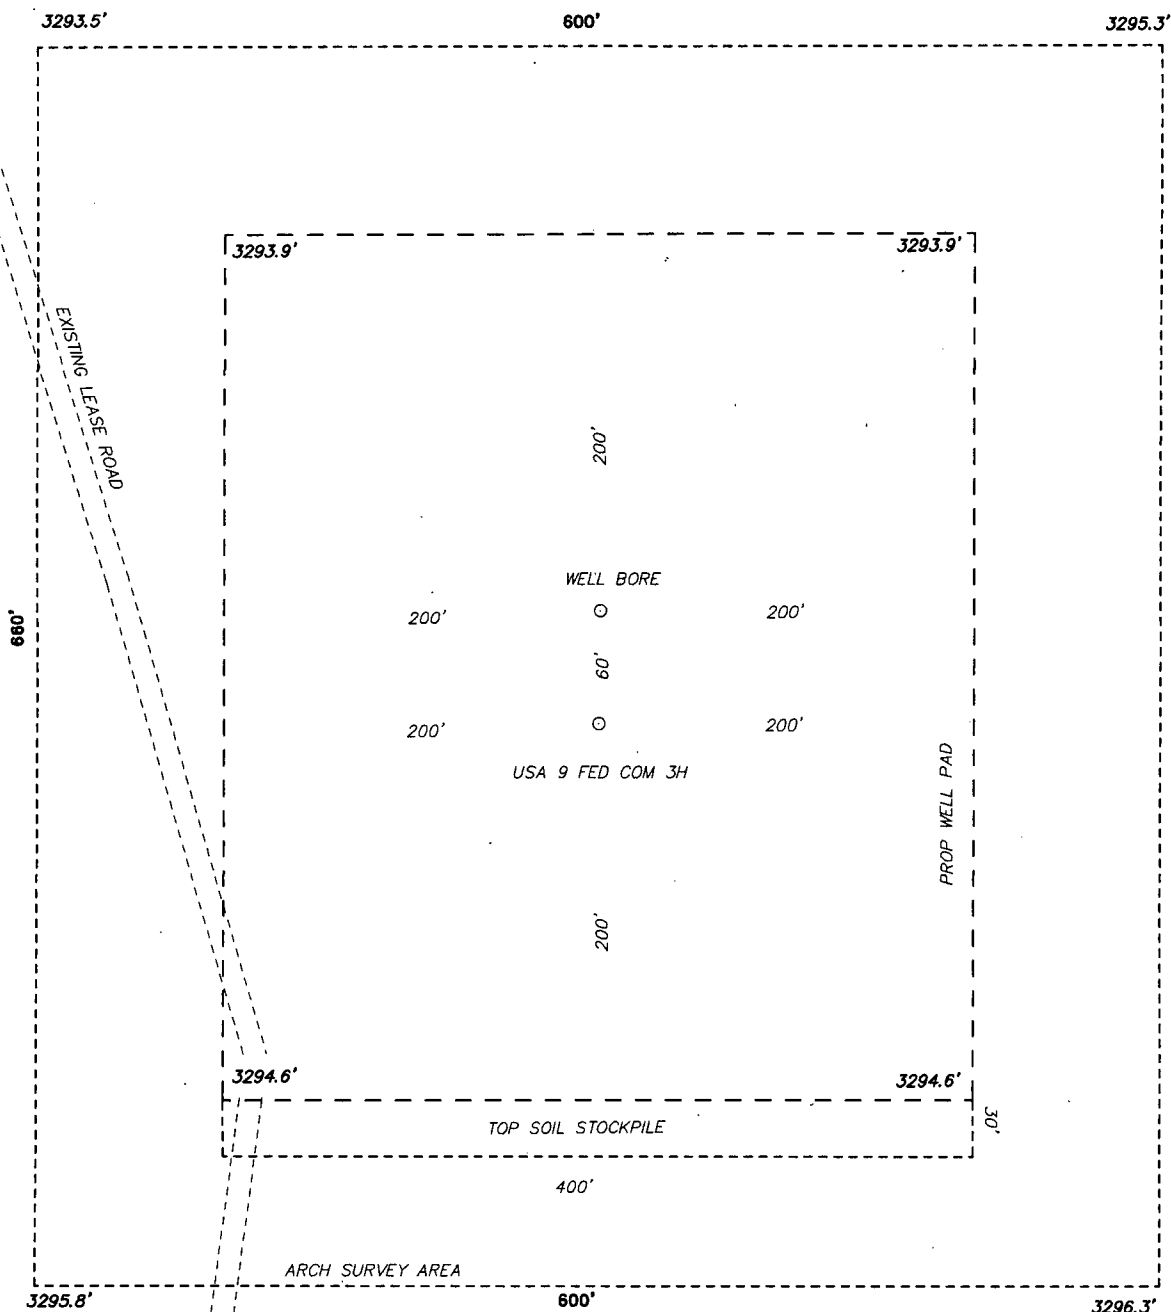

CHI ENERGY, INCORPORATED

REF: WINCHESTER FEDERAL COM 1H / WELL PAD TOPO

THE WINCHESTER FEDERAL COM 1H LOCATED 300' FROM
THE NORTH LINE AND 330' FROM THE EAST LINE OF
SECTION 9, TOWNSHIP 20 SOUTH, RANGE 28 EAST,
N.M.P.M., EDDY COUNTY, NEW MEXICO.

basin
surveys
focused on excellence
in the oilfield

P.O. Box 1786 (575) 393-7316 - Office
1120 N. West County Rd. (575) 392-2206 - Fax
Hobbs, New Mexico 88241 basin-surveys.com


W.O. Number: 30876

Drawn By: K. NORRIS

Date: 07-22-2014

Survey Date: 08-27-2014

Sheet 1 of 1 Sheets

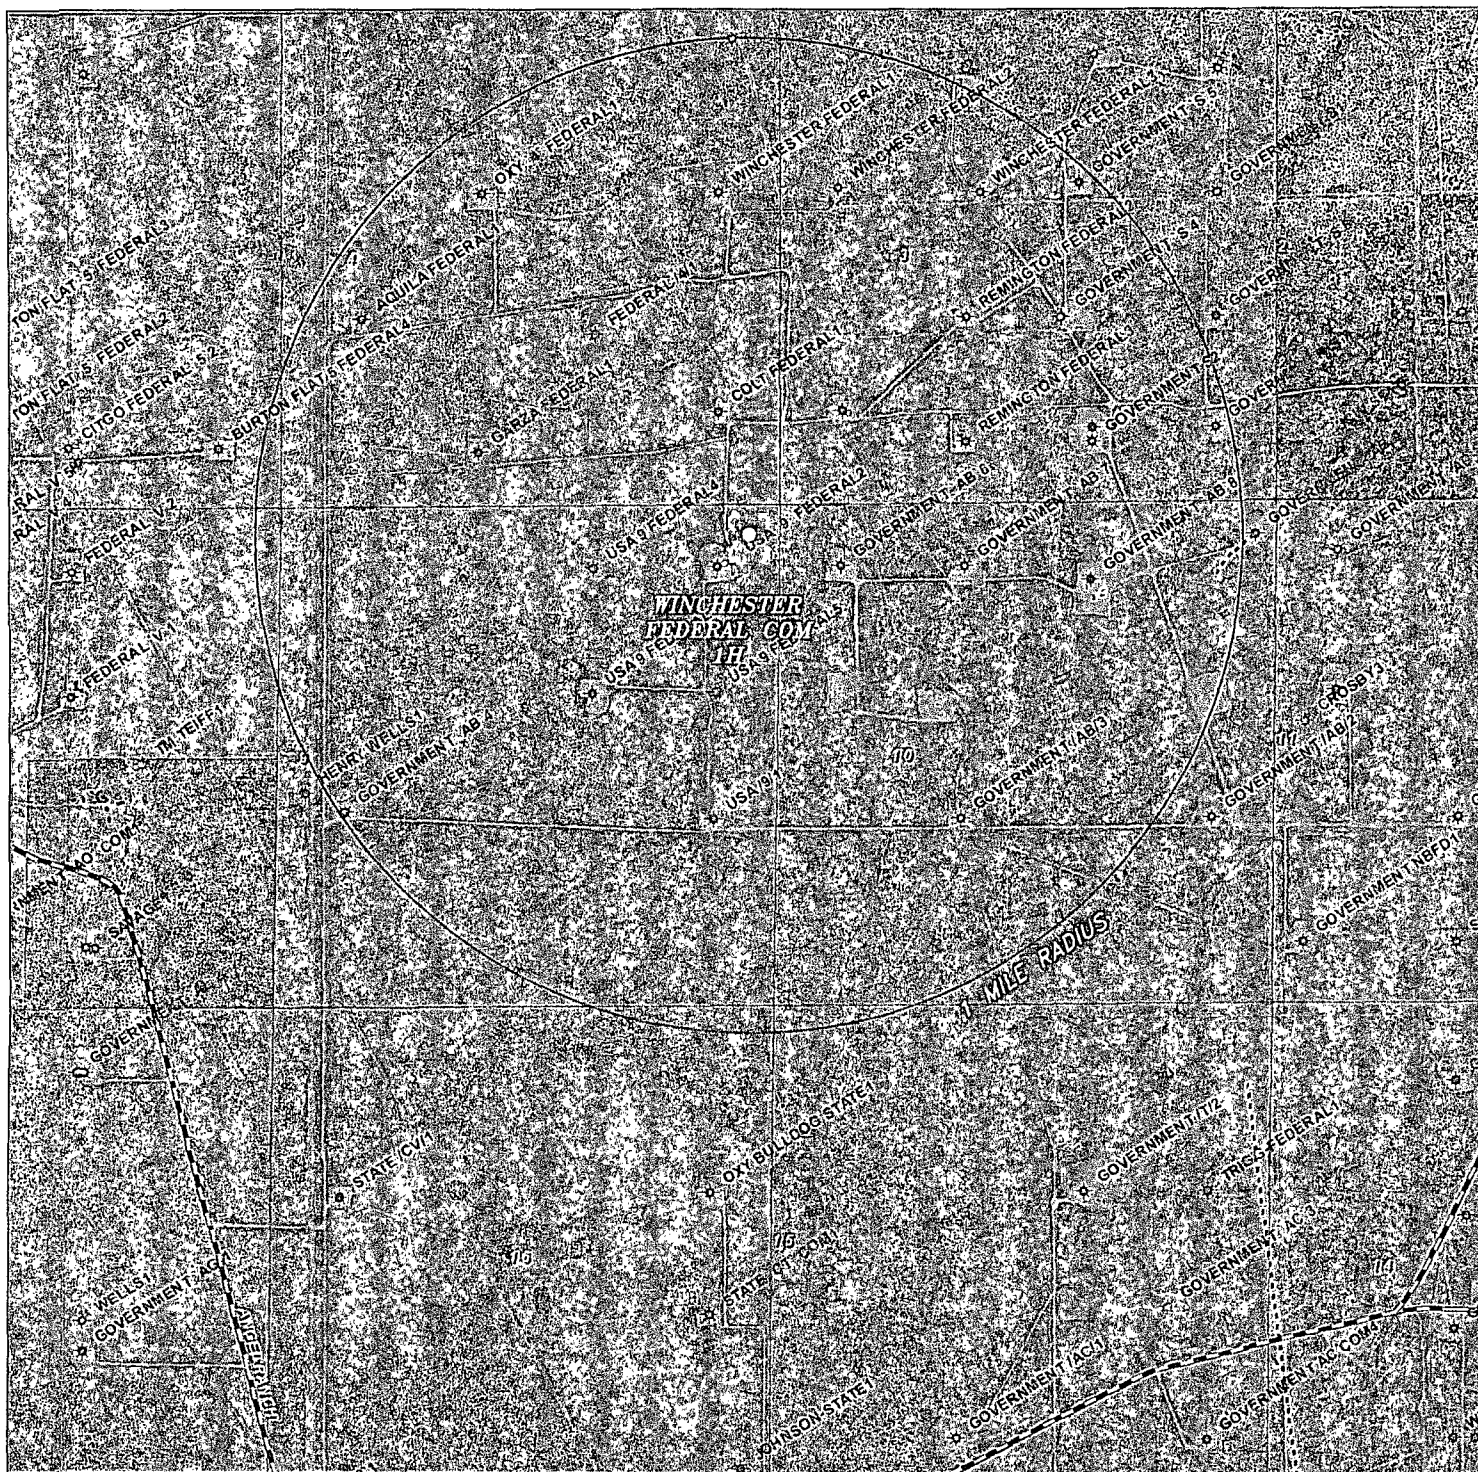

WINCHESTER FEDERAL COM 1H
 Located 300' FNL and 330' FEL
 Section 9, Township 20 South, Range 28 East,
 N.M.P.M., Eddy County, New Mexico.

basin
surveys
 focused on excellence
 in the oilfield

P.O. Box 1786
 1120 N. West County Rd.
 Hobbs, New Mexico 88241
 (575) 393-7316 - Office
 (575) 392-2206 - Fax
 basinsurveys.com

0' 1000' 2000' 3000' 4000'
 SCALE: 1" = 2000'

W.O. Number: KAN 30876

Survey Date: 08-27-2014


YELLOW TINT - USA LAND
 BLUE TINT - STATE LAND
 NATURAL COLOR - FEE LAND

**CHI ENERGY,
 INCORPORATED**

Access

$$1.5'' = 1 \text{ mile}$$


Located 300' FNL and 330' FEL
Section 9, Township 20 South, Range 28 East,
N.M.P.M., Eddy County, New Mexico.



CHI ENERGY,
INCORPORATED

Application to Drill
Chi Operating, Inc.
Winchester Federal Com 1H
300' FNL & 330' FEL (SHL)
Sec 9-T20S-R28E
330' FNL & 330' FEL (BHL)
Sec 4-T20S-R28E
Eddy County, New Mexico

1. The estimated tops of geological markers are as follows:

Rustler	150'
Top Salt	750'
Base Salt	950'
*Yates	1243'
Seven Rivers	1375'
Queen	1867'
*Delaware	2944'
*Bone Spring	4612'
TVD	7340'

2. Estimated depths of anticipated fresh water, oil, or gas:

Water: Fresh water is anticipated at 65' and will be protected by setting surface Casing at 450' and cementing to surface.

Hydrocarbons: Oil and gas are anticipated in the above (*) formations. These zones will be protected by casing as necessary.

3. Pressure control equipment:

A 5000psi working pressure BOP tested as a 3M, consisting of one set of blind rams and one set of pipe rams and a 5000# annular type preventer. A choke manifold and 120 gallon accumulator with Floor and remote operating stations and auxiliary power system. Rotating head as needed. A kelly cock will be Installed and maintained in operable condition and a drill string safety valve in the open position will be available on the rig floor.

BOP unit will be hydraulically operated. BOP will be nipped up and operated at least once a day while drilling and the blind rams will be operated when out of hole during trips. No abnormal pressure or temperature is expected while drilling from the base of the surface pipe through the running of production casing, the well will be equipped with a 5000psi BOP tested to a 3M system. The testing will be done by an independent service company.

Chi Operating, Inc. proposes to drill a vertical wellbore to 6692' & kick off to horizontal @ 7340' TVD. The well will be drilled to 12287' MD (7340' TVD). See attached directional plan.

4. Proposed casing and cementing program:

A. Casing Program: **ALL NEW CASING**

<u>Hole Size</u>	<u>Casing</u>	<u>Wt/Ft.</u>	<u>Grade</u>	<u>Depth</u>	<u>Jt Type</u>
17 1/2"	13 3/8" (new)	54.5#	J55	0'- 450' ³⁶⁰	ST&C
12 1/4"	9 5/8" (new)	36#	J55	0'- 3100' ²⁹⁵⁰	LT&C
8 3/4"	7" (new)	26#	P110	0'-7340' TVD	LT&C
6 1/8"	4 1/2" (new)	11.6#	P110	7030' -12287' MD	LT&C

See
COA

Minimum casing design factors: Collapse 1.125, Burst 1.0, Tensile strength 1.8

*Subject to availability of casing

B. Cementing Program:

Surface 410sx Premium Plus + 3% Salt + 25 CaCl₂(wt 14.8, yld 1.34). 100% excess.
TOC Surface

Intermediate Lead: 550sx EconoCem + 3% Salt + 2% CaCl₂ + 3 lbm/sk Gilsonite(wt 11.7, yld 2.06). 51% excess.
Tail: 225sx Premium Plus + 1% CaCl₂(wt 14.8, yld 1.34). 51% excess.
TOC Surface

Production Lead: 535sx EconoCem + 3% Salt + 5 lbm/sk gilsonite(wt 13.0, yld 1.71). 30% excess.
Tail: 995sx Halcem(wt14.8, yld 1.34). 25% excess.
TOC Surface

Lateral No cement needed. Open hole completion assembly.

Fresh water zones will be protected by setting 13 3/8" casing at 450' and cementing to surface.

Hydrocarbon zones will be protected by setting 9 5/8" casing at 3100' and cementing to surface, and by setting 7" casing at 7340'.

5. Mud Program:

<u>Interval</u>	<u>Type System</u>	<u>Weight</u>	<u>Viscosity</u>	<u>Fluid Loss</u>
0'- 450' ³⁶⁰	FW	8.5-8.9	32-36	NA
450'-3100' ²⁹⁵⁰	Brine Water	9.0-10.0	28-30	NA
3100'- TD	Cut Brine w/Polymer	8.9-9.1	28-36	15

The necessary mud products for weight addition and fluid loss control will be on location at all times. Electronic pit monitoring equipment will be utilized with a Pason system. Electronic mud monitoring and mud logging will be utilized below the 9 5/8" casing.

6. Evaluation Program:

Samples: 10' samples from surface casing to TD
Logging: GR/N & Gyro from KOP-100' (6692') to surface. GR from 7340' to TD.
No coring is planned

7. Downhole Conditions:

Zones of H2S	None Present but if encountered the operator will comply with the provisions of Onshore Order No. 6.
Zones of abnormal pressure:	None anticipated
Zones of lost circulation:	Anticipated in surface and intermediate holes. Equipment and material will be available on location in the event of lost circulation.
Maximum bottom hole temperature:	120 degrees F
Maximum bottom hole pressure:	3229 psi.

8. Anticipated Starting Date:

Chi Operating, Inc. intends to drill this well as soon as possible after receiving approval with approximately 40 days involved in drilling operations and an additional 10 days involved in completions operations on the project.

SITE DETAILS: Winchester Federal Com #1H

Site Centre Northing: 580027.56
Easting: 548998.95

Positional Uncertainty: 0.00
Convergence: 0.09
Local North: Grid

PROJECT DETAILS: Eddy County, New Mexico

Geodetic System: US State Plane 1927 (Exact solution)
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1866
Zone: New Mexico East 3001

System Datum: Mean Sea Level



Azimuths to Grid North
True North: -0.09°
Magnetic North: 7.55°




Magnetic Field
Strength: 48430.0nT
Dip Angle: 60.48°
Date: 12/2/2014
Model: HDGM

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Shape Point
Winchester Federal Com #1H - BHL	7340.00	5250.58	5.69	585278.15	549004.64	32° 36' 32.160 N	104° 10' 27.086 W	

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect	Target	Annotation
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
2	6692.00	0.00	0.00	6692.00	0.00	0.00	0.00	0.00	0.00		KOP, Build 9.50°/100'
3	7633.55	89.45	0.06	7295.09	597.29	0.65	9.50	0.06	597.29		Hold 89.45°, 0.06° Azimuth
4	12287.06	89.45	0.06	7340.00	5250.58	5.69	0.00	0.00	5250.59	Winchester Federal Com #1H - BHL	PBHL - Lateral

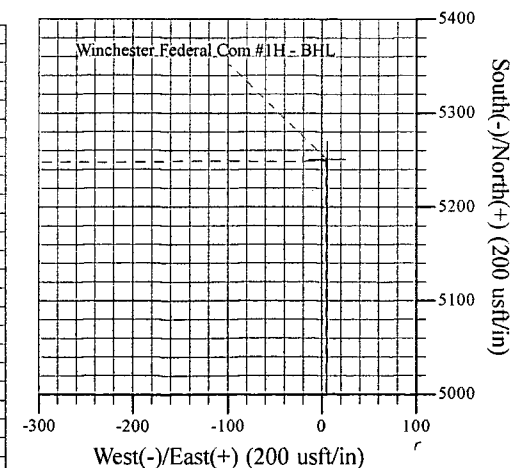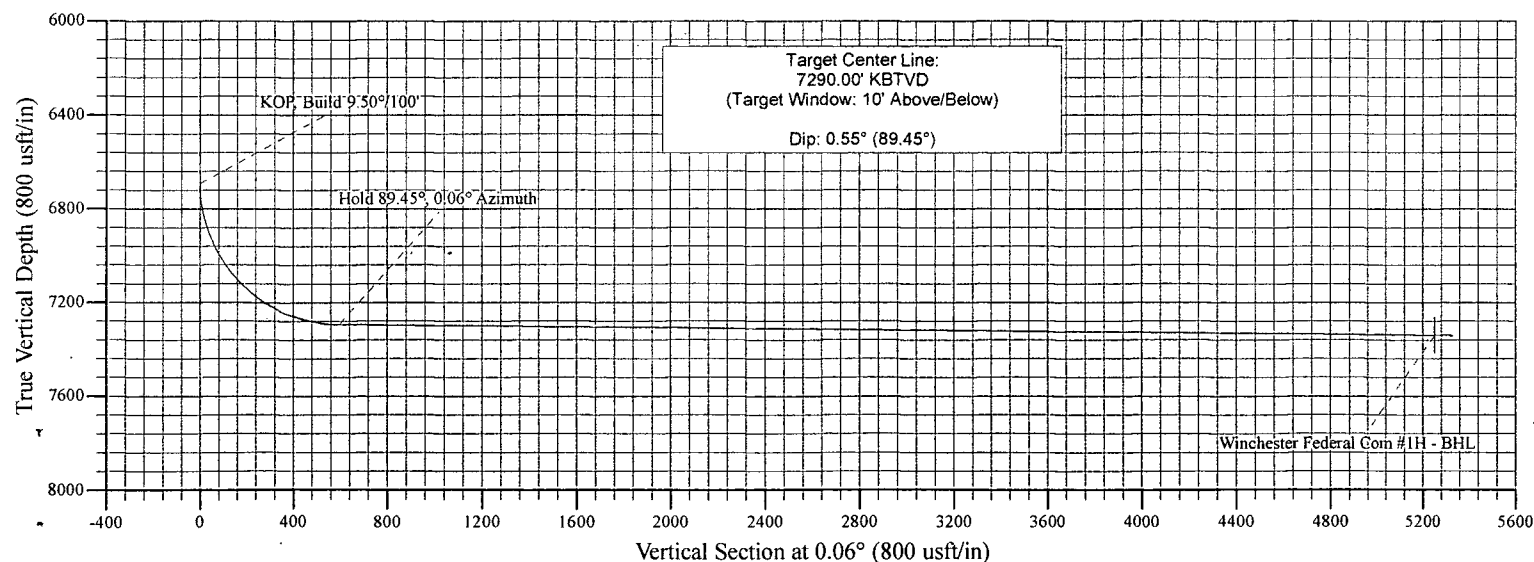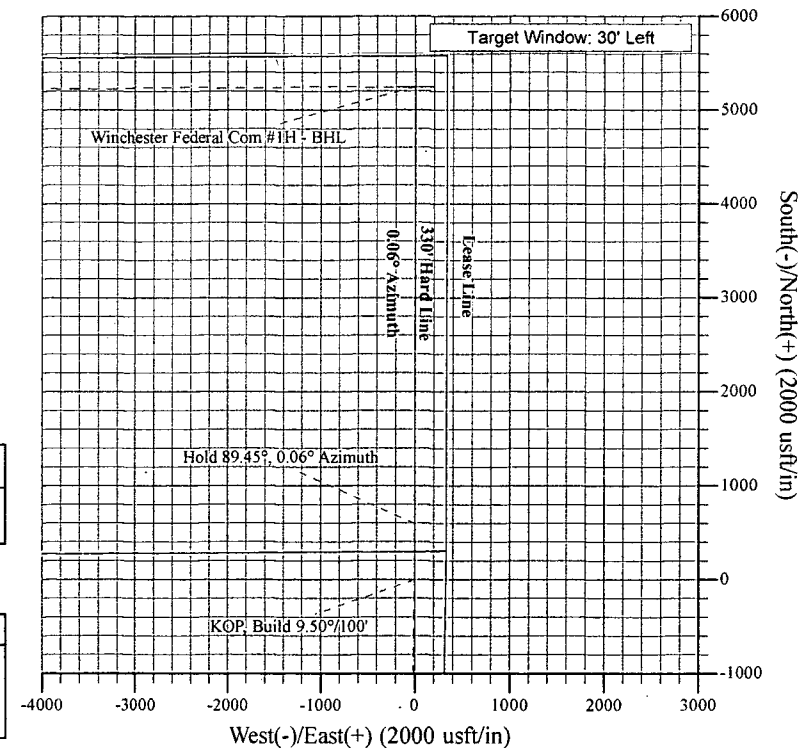

Planning Report

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well #1H
Company:	Chi Energy	TVD Reference:	WELL @ 3321.00usft (Original Well Elev)
Project:	Eddy County, New Mexico	MD Reference:	WELL @ 3321.00usft (Original Well Elev)
Site:	Winchester Federal Com #1H	North Reference:	Grid
Well:	#1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral 1r0		
Design:	Lateral 1r0		

Project:	Eddy County, New Mexico		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site:	Winchester Federal Com #1H		
Site Position:		Northing:	580,027.57 usft
From:	Map	Easting:	548,998.96 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16"
		Latitude:	32° 35' 40.202 N
		Longitude:	104° 10' 27.244 W
		Grid Convergence:	0.09 °

Well	#1H					
Well Position	+N-S	0.00 usft	Northing:	580,027.57 usft	Latitude:	32° 35' 40.202 N
	+E-W	0.00 usft	Easting:	548,998.96 usft	Longitude:	104° 10' 27.244 W
Position Uncertainty		0.00 usft	Wellhead Elevation:	0.00 usft	Ground Level:	3,294.00 usft

Wellbore:	Lateral 1r0		
-----------	-------------	--	--

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM	12/2/2014	7.63	60.48	48,430

Design:	Lateral 1r0		
---------	-------------	--	--

Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD)	+N-S	+E-W	Direction
	(usft)	(usft)	(usft)	(°)
	0.00	0.00	0.00	0.06

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N-S (usft)	+E-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
6,692.00	0.00	0.00	6,692.00	0.00	0.00	0.00	0.00	0.00	0.00	
7,633.55	89.45	0.06	7,295.09	597.29	0.65	9.50	9.50	0.01	0.06	
12,287.06	89.45	0.06	7,340.00	5,250.58	5.69	0.00	0.00	0.00	0.00	Winchester Federal

Planning Report

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well #1H
Company:	Chi Energy	TVD Reference:	WELL @ 3321.00usft (Original Well Elev)
Project:	Eddy County, New Mexico	MD Reference:	WELL @ 3321.00usft (Original Well Elev)
Site:	Winchester Federal Com #1H	North Reference:	Gnd
Well:	#1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral 1r0		
Design:	Lateral 1r0		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00
5,100.00	0.00	0.00	5,100.00	0.00	0.00	0.00	0.00	0.00	0.00
5,200.00	0.00	0.00	5,200.00	0.00	0.00	0.00	0.00	0.00	0.00
5,300.00	0.00	0.00	5,300.00	0.00	0.00	0.00	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well #1H
Company:	Chi Energy	TVD Reference:	WELL @ 3321.00usft (Original Well Elev)
Project:	Eddy County, New Mexico	MD Reference:	WELL @ 3321.00usft (Original Well Elev)
Site:	Winchester Federal Corn #1H	North Reference:	Grid
Well:	#1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral 1r0		
Design:	Lateral 1r0		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,400.00	0.00	0.00	5,400.00	0.00	0.00	0.00	0.00	0.00	0.00
5,500.00	0.00	0.00	5,500.00	0.00	0.00	0.00	0.00	0.00	0.00
5,600.00	0.00	0.00	5,600.00	0.00	0.00	0.00	0.00	0.00	0.00
5,700.00	0.00	0.00	5,700.00	0.00	0.00	0.00	0.00	0.00	0.00
5,800.00	0.00	0.00	5,800.00	0.00	0.00	0.00	0.00	0.00	0.00
5,900.00	0.00	0.00	5,900.00	0.00	0.00	0.00	0.00	0.00	0.00
6,000.00	0.00	0.00	6,000.00	0.00	0.00	0.00	0.00	0.00	0.00
6,100.00	0.00	0.00	6,100.00	0.00	0.00	0.00	0.00	0.00	0.00
6,200.00	0.00	0.00	6,200.00	0.00	0.00	0.00	0.00	0.00	0.00
6,300.00	0.00	0.00	6,300.00	0.00	0.00	0.00	0.00	0.00	0.00
6,400.00	0.00	0.00	6,400.00	0.00	0.00	0.00	0.00	0.00	0.00
6,500.00	0.00	0.00	6,500.00	0.00	0.00	0.00	0.00	0.00	0.00
6,600.00	0.00	0.00	6,600.00	0.00	0.00	0.00	0.00	0.00	0.00
6,692.00	0.00	0.00	6,692.00	0.00	0.00	0.00	0.00	0.00	0.00
KOP, Build 9.50°/100'									
6,700.00	0.76	0.06	6,700.00	0.05	0.00	0.05	9.50	9.50	0.00
6,750.00	5.51	0.06	6,749.91	2.79	0.00	2.79	9.50	9.50	0.00
6,800.00	10.26	0.06	6,799.42	9.64	0.01	9.64	9.50	9.50	0.00
6,850.00	15.01	0.06	6,848.20	20.58	0.02	20.58	9.50	9.50	0.00
6,900.00	19.76	0.06	6,895.90	35.51	0.04	35.51	9.50	9.50	0.00
6,950.00	24.51	0.06	6,942.20	54.35	0.06	54.35	9.50	9.50	0.00
7,000.00	29.26	0.06	6,986.79	76.95	0.08	76.95	9.50	9.50	0.00
7,050.00	34.01	0.06	7,029.34	103.17	0.11	103.17	9.50	9.50	0.00
7,100.00	38.76	0.06	7,069.59	132.82	0.14	132.82	9.50	9.50	0.00
7,150.00	43.51	0.06	7,107.23	165.70	0.18	165.70	9.50	9.50	0.00
7,200.00	48.26	0.06	7,142.03	201.59	0.22	201.59	9.50	9.50	0.00
7,250.00	53.01	0.06	7,173.73	240.23	0.26	240.23	9.50	9.50	0.00
7,300.00	57.76	0.06	7,202.13	281.37	0.30	281.37	9.50	9.50	0.00
7,350.00	62.51	0.06	7,227.02	324.72	0.35	324.72	9.50	9.50	0.00
7,400.00	67.26	0.06	7,248.23	369.98	0.40	369.98	9.50	9.50	0.00
7,450.00	72.01	0.06	7,265.63	416.84	0.45	416.84	9.50	9.50	0.00
7,500.00	76.76	0.06	7,279.08	464.98	0.50	464.98	9.50	9.50	0.00
7,550.00	81.51	0.06	7,288.50	514.07	0.56	514.07	9.50	9.50	0.00
7,600.00	86.26	0.06	7,293.83	563.77	0.61	563.77	9.50	9.50	0.00
7,633.55	89.45	0.06	7,295.09	597.29	0.65	597.30	9.50	9.50	0.00
Hold 89.45° 0.06° Azimuth									
7,700.00	89.45	0.06	7,295.73	663.74	0.72	663.74	0.00	0.00	0.00
7,800.00	89.45	0.06	7,296.69	763.74	0.83	763.74	0.00	0.00	0.00
7,900.00	89.45	0.06	7,297.66	863.73	0.94	863.73	0.00	0.00	0.00
8,000.00	89.45	0.06	7,298.62	963.73	1.04	963.73	0.00	0.00	0.00
8,100.00	89.45	0.06	7,299.59	1,063.72	1.15	1,063.72	0.00	0.00	0.00
8,200.00	89.45	0.06	7,300.55	1,163.72	1.26	1,163.72	0.00	0.00	0.00
8,300.00	89.45	0.06	7,301.52	1,263.71	1.37	1,263.71	0.00	0.00	0.00
8,400.00	89.45	0.06	7,302.48	1,363.71	1.48	1,363.71	0.00	0.00	0.00
8,500.00	89.45	0.06	7,303.45	1,463.70	1.59	1,463.70	0.00	0.00	0.00
8,600.00	89.45	0.06	7,304.41	1,563.70	1.69	1,563.70	0.00	0.00	0.00
8,700.00	89.45	0.06	7,305.38	1,663.69	1.80	1,663.70	0.00	0.00	0.00
8,800.00	89.45	0.06	7,306.34	1,763.69	1.91	1,763.69	0.00	0.00	0.00
8,900.00	89.45	0.06	7,307.31	1,863.69	2.02	1,863.69	0.00	0.00	0.00
9,000.00	89.45	0.06	7,308.27	1,963.68	2.13	1,963.68	0.00	0.00	0.00
9,100.00	89.45	0.06	7,309.24	2,063.68	2.24	2,063.68	0.00	0.00	0.00
9,200.00	89.45	0.06	7,310.20	2,163.67	2.34	2,163.67	0.00	0.00	0.00
9,300.00	89.45	0.06	7,311.17	2,263.67	2.45	2,263.67	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well #1H
Company:	Chi Energy	TVD Reference:	WELL @ 3321.00usft (Original Well Elev)
Project:	Eddy County, New Mexico	MD Reference:	WELL @ 3321.00usft (Original Well Elev)
Site:	Winchester Federal Com #1H	North Reference:	Gnd
Well:	#1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral 1r0		
Design:	Lateral 1r0		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,400.00	89.45	0.06	7,312.13	2,363.66	2.56	2,363.66	0.00	0.00	0.00
9,500.00	89.45	0.06	7,313.10	2,463.66	2.67	2,463.66	0.00	0.00	0.00
9,600.00	89.45	0.06	7,314.07	2,563.65	2.78	2,563.65	0.00	0.00	0.00
9,700.00	89.45	0.06	7,315.03	2,663.65	2.89	2,663.65	0.00	0.00	0.00
9,800.00	89.45	0.06	7,316.00	2,763.64	2.99	2,763.64	0.00	0.00	0.00
9,900.00	89.45	0.06	7,316.96	2,863.64	3.10	2,863.64	0.00	0.00	0.00
10,000.00	89.45	0.06	7,317.93	2,963.63	3.21	2,963.63	0.00	0.00	0.00
10,100.00	89.45	0.06	7,318.89	3,063.63	3.32	3,063.63	0.00	0.00	0.00
10,200.00	89.45	0.06	7,319.86	3,163.62	3.43	3,163.63	0.00	0.00	0.00
10,300.00	89.45	0.06	7,320.82	3,263.62	3.54	3,263.62	0.00	0.00	0.00
10,400.00	89.45	0.06	7,321.79	3,363.61	3.64	3,363.62	0.00	0.00	0.00
10,500.00	89.45	0.06	7,322.75	3,463.61	3.75	3,463.61	0.00	0.00	0.00
10,600.00	89.45	0.06	7,323.72	3,563.60	3.86	3,563.61	0.00	0.00	0.00
10,700.00	89.45	0.06	7,324.68	3,663.60	3.97	3,663.60	0.00	0.00	0.00
10,800.00	89.45	0.06	7,325.65	3,763.60	4.08	3,763.60	0.00	0.00	0.00
10,900.00	89.45	0.06	7,326.61	3,863.59	4.19	3,863.59	0.00	0.00	0.00
11,000.00	89.45	0.06	7,327.58	3,963.59	4.29	3,963.59	0.00	0.00	0.00
11,100.00	89.45	0.06	7,328.54	4,063.58	4.40	4,063.58	0.00	0.00	0.00
11,200.00	89.45	0.06	7,329.51	4,163.58	4.51	4,163.58	0.00	0.00	0.00
11,300.00	89.45	0.06	7,330.47	4,263.57	4.62	4,263.57	0.00	0.00	0.00
11,400.00	89.45	0.06	7,331.44	4,363.57	4.73	4,363.57	0.00	0.00	0.00
11,500.00	89.45	0.06	7,332.40	4,463.56	4.84	4,463.57	0.00	0.00	0.00
11,600.00	89.45	0.06	7,333.37	4,563.56	4.94	4,563.56	0.00	0.00	0.00
11,700.00	89.45	0.06	7,334.33	4,663.55	5.05	4,663.56	0.00	0.00	0.00
11,800.00	89.45	0.06	7,335.30	4,763.55	5.16	4,763.55	0.00	0.00	0.00
11,900.00	89.45	0.06	7,336.26	4,863.54	5.27	4,863.55	0.00	0.00	0.00
12,000.00	89.45	0.06	7,337.23	4,963.54	5.38	4,963.54	0.00	0.00	0.00
12,100.00	89.45	0.06	7,338.19	5,063.53	5.49	5,063.54	0.00	0.00	0.00
12,200.00	89.45	0.06	7,339.16	5,163.53	5.59	5,163.53	0.00	0.00	0.00
12,287.06	89.45	0.06	7,340.00	5,250.58	5.69	5,250.59	0.00	0.00	0.00

PBHL - Lateral


Design Targets

Target Name	hit/miss target	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
Winchester Federal C	- plan hits target center	0.00	0.00	7,340.00	5,250.58	5.69	585,278.15	549,004.65	32° 36' 32.160 N	104° 10' 27.086 W
	- Point									


Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates +N/-S (usft)	+E/-W (usft)	Comment
6,692.00	6,692.00	0.00	0.00	KOP, Build 9.50°/100°
7,633.55	7,295.09	597.29	0.65	Hold 89.45°, 0.06° Azimuth
12,287.06	7,340.00	5,250.58	5.69	PBHL - Lateral

5,000 psi Stack

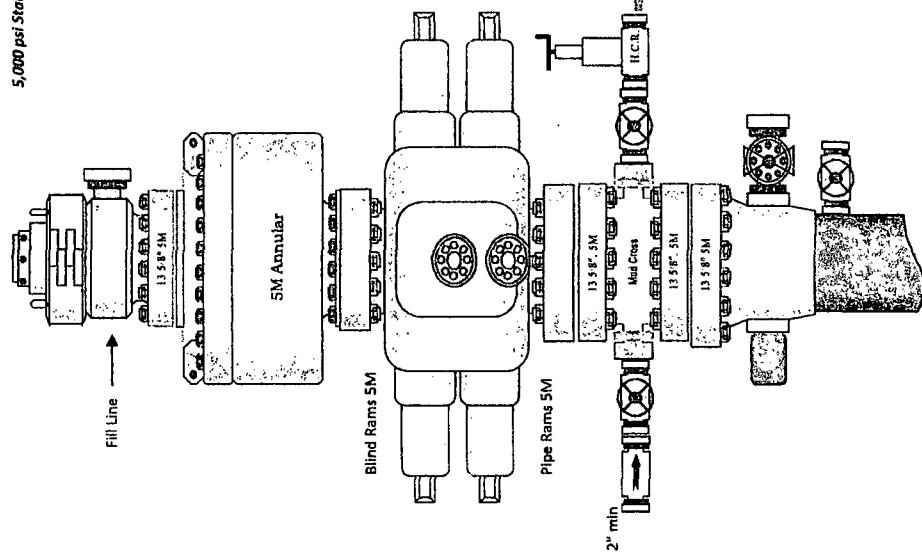

5,000 psi Manifold

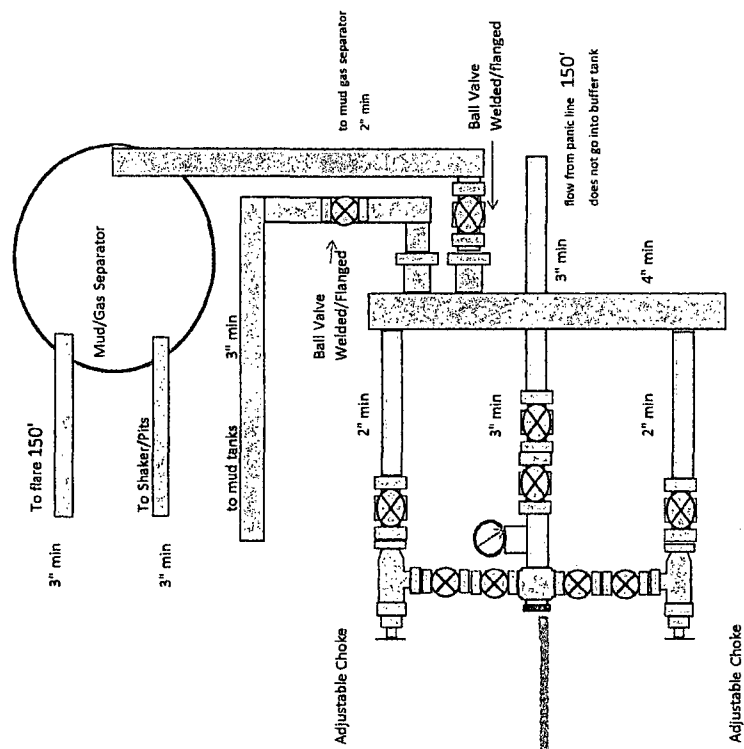

Plat for Closed Loop System


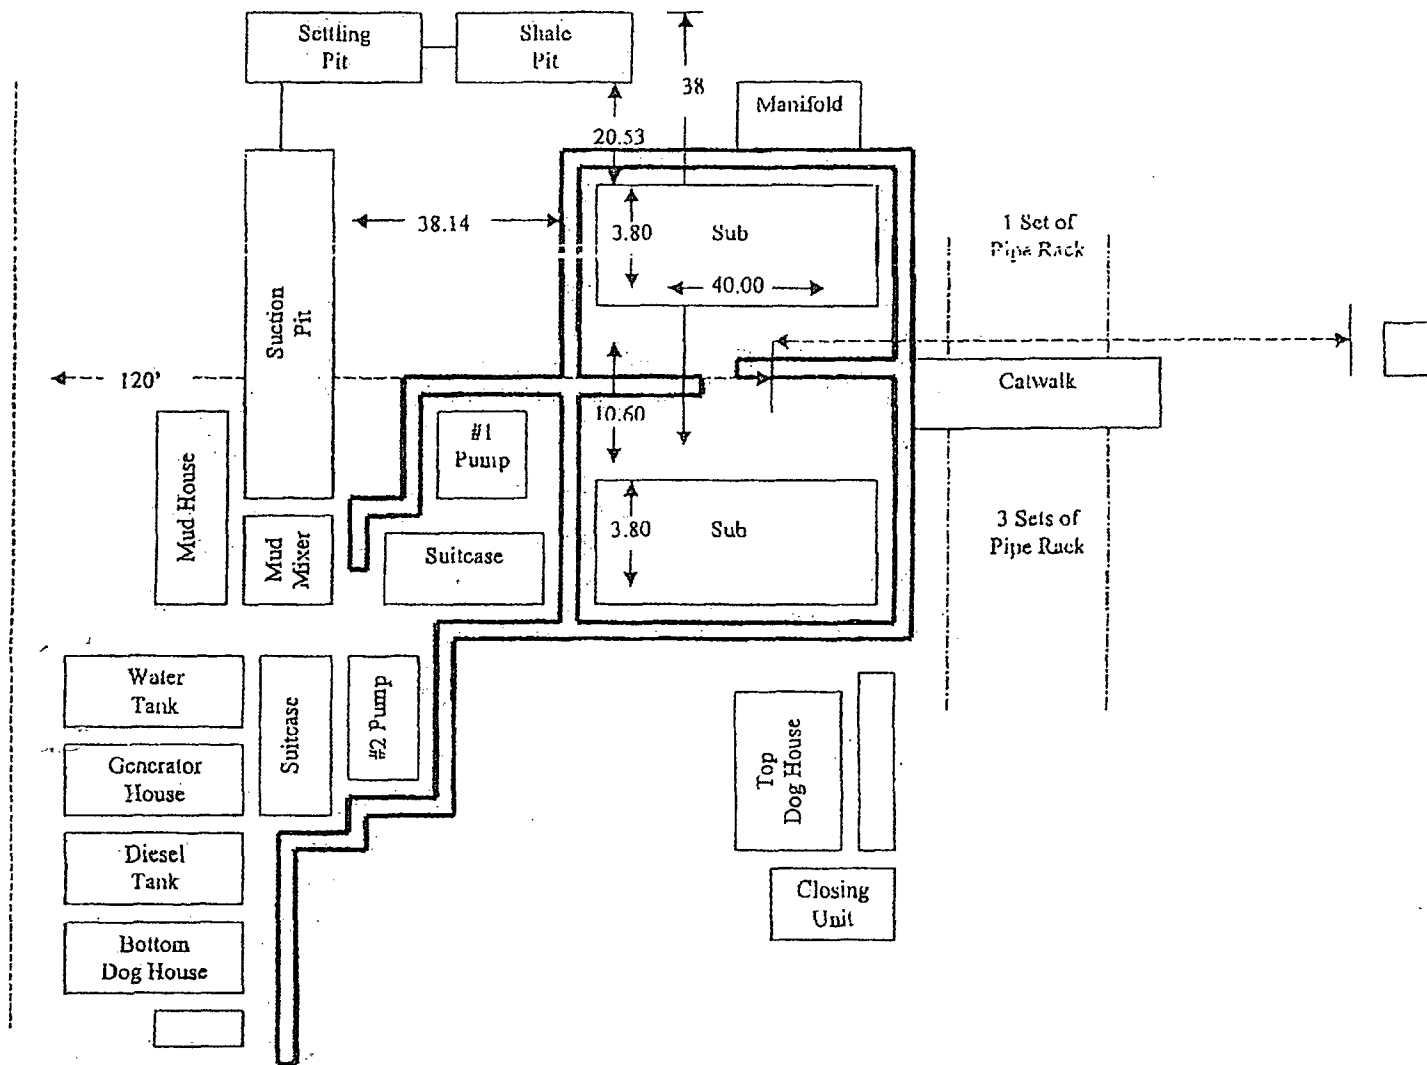


EXHIBIT D

Rig Plat Only
WINCHESTER FED COM 1H & USA 9 FED COM 3H
V-DOOR EAST

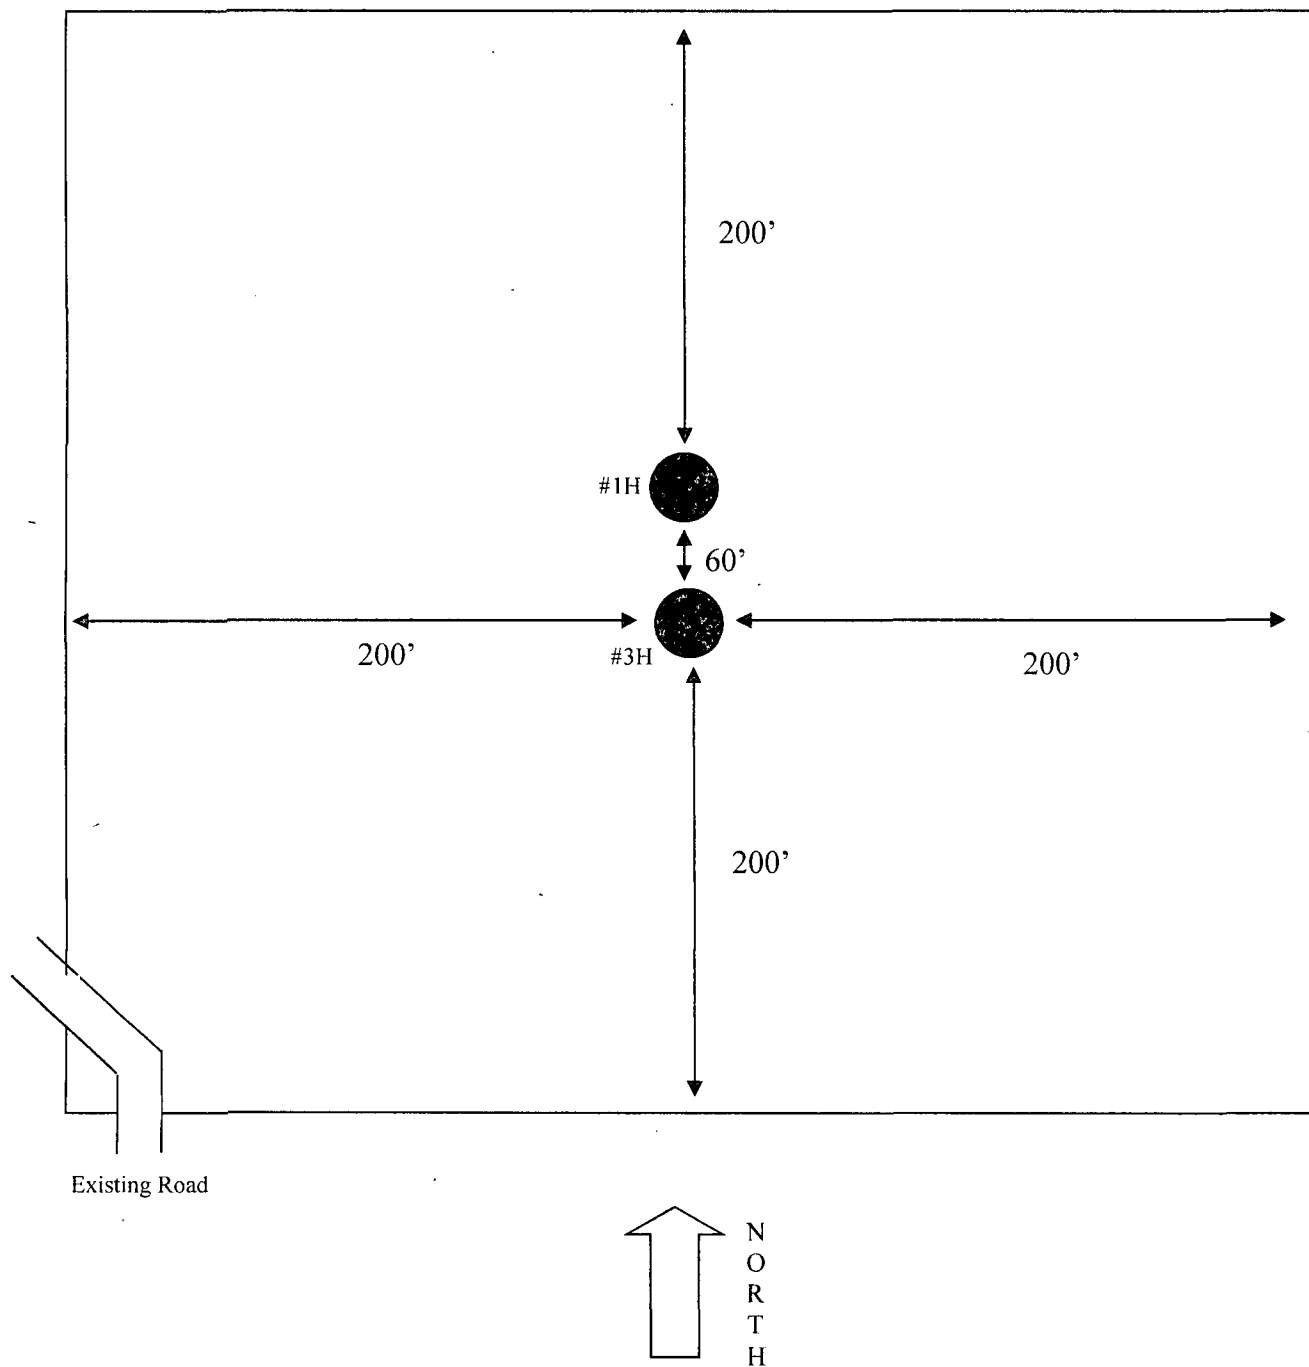

CHI OPERATING, INC.

WINCHESTER FEDERAL COM 1H HYDROGEN SULFIDE (H₂S) CONTINGENCY DRILLING PLAN

Assumed 100 ppm ROE = 3000'

100 ppm H₂S concentration shall trigger activation of this plan.

This is an open drilling site. H₂S monitoring equipment and emergency response equipment will be rigged up and in use when the company drills out from under surface casing. H₂S monitors, warning signs, wind indicators and flags will be in use.

- A. All personnel shall receive proper H₂S training in accordance with Onshore Order 6 III.C.3.a
- B. Briefing Area: Two perpendicular areas will be designated by signs and readily accessible.
- C. Required Emergency Equipment:
 - Well control equipment
 - a. Flare line 150' from wellhead to be ignited by flare gun.
 - b. Choke manifold with a remotely operated choke.
 - c. Mud/Gas Separator.
 - Protective Equipment for essential personnel.
Breathing apparatus:
 - a. Rescue Packs (SCBA) – 1 unit shall be placed at each briefing area. 2 units shall be stored in the safety trailer.
 - b. Work/Escape packs – 4 packs shall be stored on the rig floor with sufficient air hose not to restrict work activity.
 - c. Emergency Escape Packs – 4 packs shall be stored in the doghouse for emergency evacuation.

Auxillary Rescue Equipment:

- a. Stretcher
 - b. Two OSHA full body harness
 - c. 100 ft. 5/8" OSHA approved rope
 - d. One 20# class ABC fire extinguisher
- H₂S detection and monitoring Equipment:
The stationary detector with three sensors will be placed in the upper doghouse, set to visually alarm @ 10 ppm and audible @ 14 ppm. Calibrate a minimum of every 30 days or as needed. The sensors will be placed in the following places: Rig floor, Bell nipple, end of flare line or where well bore fluid is being discharged (Gas sample tubes will be stored in the safety trailer).

- Visual warning systems.
 - a. One color code condition sign will be placed at the entrance to the site reflecting the possible conditions at the site.
 - b. A colored condition flag will be on display, reflecting the current condition, at the drilling site.
 - c. Two wind socks will be placed in strategic locations being visible from all angles.
- Mud Program:
The mud program has been designated to minimize the volume of H₂S circulated to surface. The operator will have the necessary mud products to minimize hazards while drilling in H₂S bearing zones.
- Metallurgy:
 - a. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, shall be suitable for H₂S service.
 - b. All elastomers used for packing and seals shall be H₂S trim.
- Communication:
Communication will be via two way radio in emergency and company vehicles. Cell phones and land lines where available.

Contacting Authorities

CHI Operating personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available including directions to site. The following call list of essential and potential responders has been prepared for use during a release. CHI Operating, Inc. response must be in coordination with the State of New Mexico's "Hazardous Materials Emergency Response Plan" (HMER) and BLM Onshore Order #6.

H₂S Operations

Though no H₂S is anticipated during the drilling operation, this contingency plan will provide for methods to ensure the well is kept under control in the event an H₂S reading of 100 ppm or more are encountered. Once personnel are safe and the proper protective gear is in place and on personnel, the operator and rig crew essential personnel will ensure the well is under control, suspend drilling operations and shut-in the well (unless pressure build up or other operational situations dictate suspending operations will prevent well control), increase the mud weight and circulate all gas from the hole utilizing the mud/gas separator downstream of the choke, the choke manifold and the emergency flare system located 150' from the well. Bring the mud system into compliance and the H₂S level below 10 ppm, then notify all emergency officers that drilling ahead is practical and safe.

Proceed with drilling ahead only after all provisions of Onshore Order 6, Section III.C. have been satisfied.

H2S CONTINGENCY DRILLING PLAN EMERGENCY CONTACTS

Company Offices - CHI Operating Office

432-634-8958

KEY PERSONNEL					
Name	Title	Location	Phone #		
JOHN QUALLS	PRODUCTION ENGINEER	MIDLAND	432-685-5001		
RONNIE ROGERS	FIELD FOREMAN	MIDLAND	432-631-2717		

Agency Call List		
City	Agency or Office	Telephone Number
Artesia	Ambulance	911
Artesia	State Police	575-746-2703
Artesia	Sheriff's Office	575-746-9888
Artesia	City Police	575-746-2703
Artesia	Fire Department	575-746-2701
Artesia	Local Emergency Planning Committee	575-746-2122
Artesia	New Mexico OCD District II	575-748-1283
Carlsbad	Ambulance	911
Carlsbad	State Police	575-885-3137
Carlsbad	Sheriff's Office	575-887-7551
Carlsbad	City Police	575-885-2111
Carlsbad	Fire Department	575-885-2111
Carlsbad	Local Emergency Planning Committee	575-887-3798
Carlsbad	US DOI Bureau of Land Management	575-887-6544
State Wide	New Mexico Emergency Response Commission ("NMERC")	505-476-9600
State Wide	NMERC 24 hour Number	505-827-9126
State Wide	New Mexico State Emergency Operations Center	505-476-9635
National	National Emergency Response Center (Washington, D.C.)	800-424-8802

H2S CONTINGENCY DRILLING PLAN EMERGENCY CONTACTS

Emergency Services				
Name	Service	Location	Telephone Number	Alternate Number
Boots & Coots International Well Control	Well Control	Houston / Odessa	1-800-256-9688	281-931-8884
Cudd Pressure Control	Well Control & Pumping	Odessa	915-699-0139	915-563-3356
Baker Hughes Inc.	Pumping Service	Artesia, Hobbs and Odessa	575-746-2757	SAME
Total Safety	Safety Equipment and Personnel	Artesia	575-746-2847	SAME
Cutter Oilfield Services	Drilling Systems Equipment	Midland	432-488-6707	SAME
Assurance Fire & Safety	Safety Equipment and Personnel	Artesia	575-396-9702	575-441-2224
Flight for Life	Emergency Helicopter Evacuation	Lubbock	806-743-9911	SAME
Aerocare	Emergency Helicopter Evacuation	Lubbock	806-747-8923	SAME
Med Flight Air Ambulance	Emergency Helicopter Evacuation	Albuquerque	505-842-4433	SAME
Artesia General Hospital	Emergency Medical Care	Artesia	575-748-3333	702 North 13 Street



Prevailing Winds
Direction SW

H₂S Briefing Areas and Alarm Locations


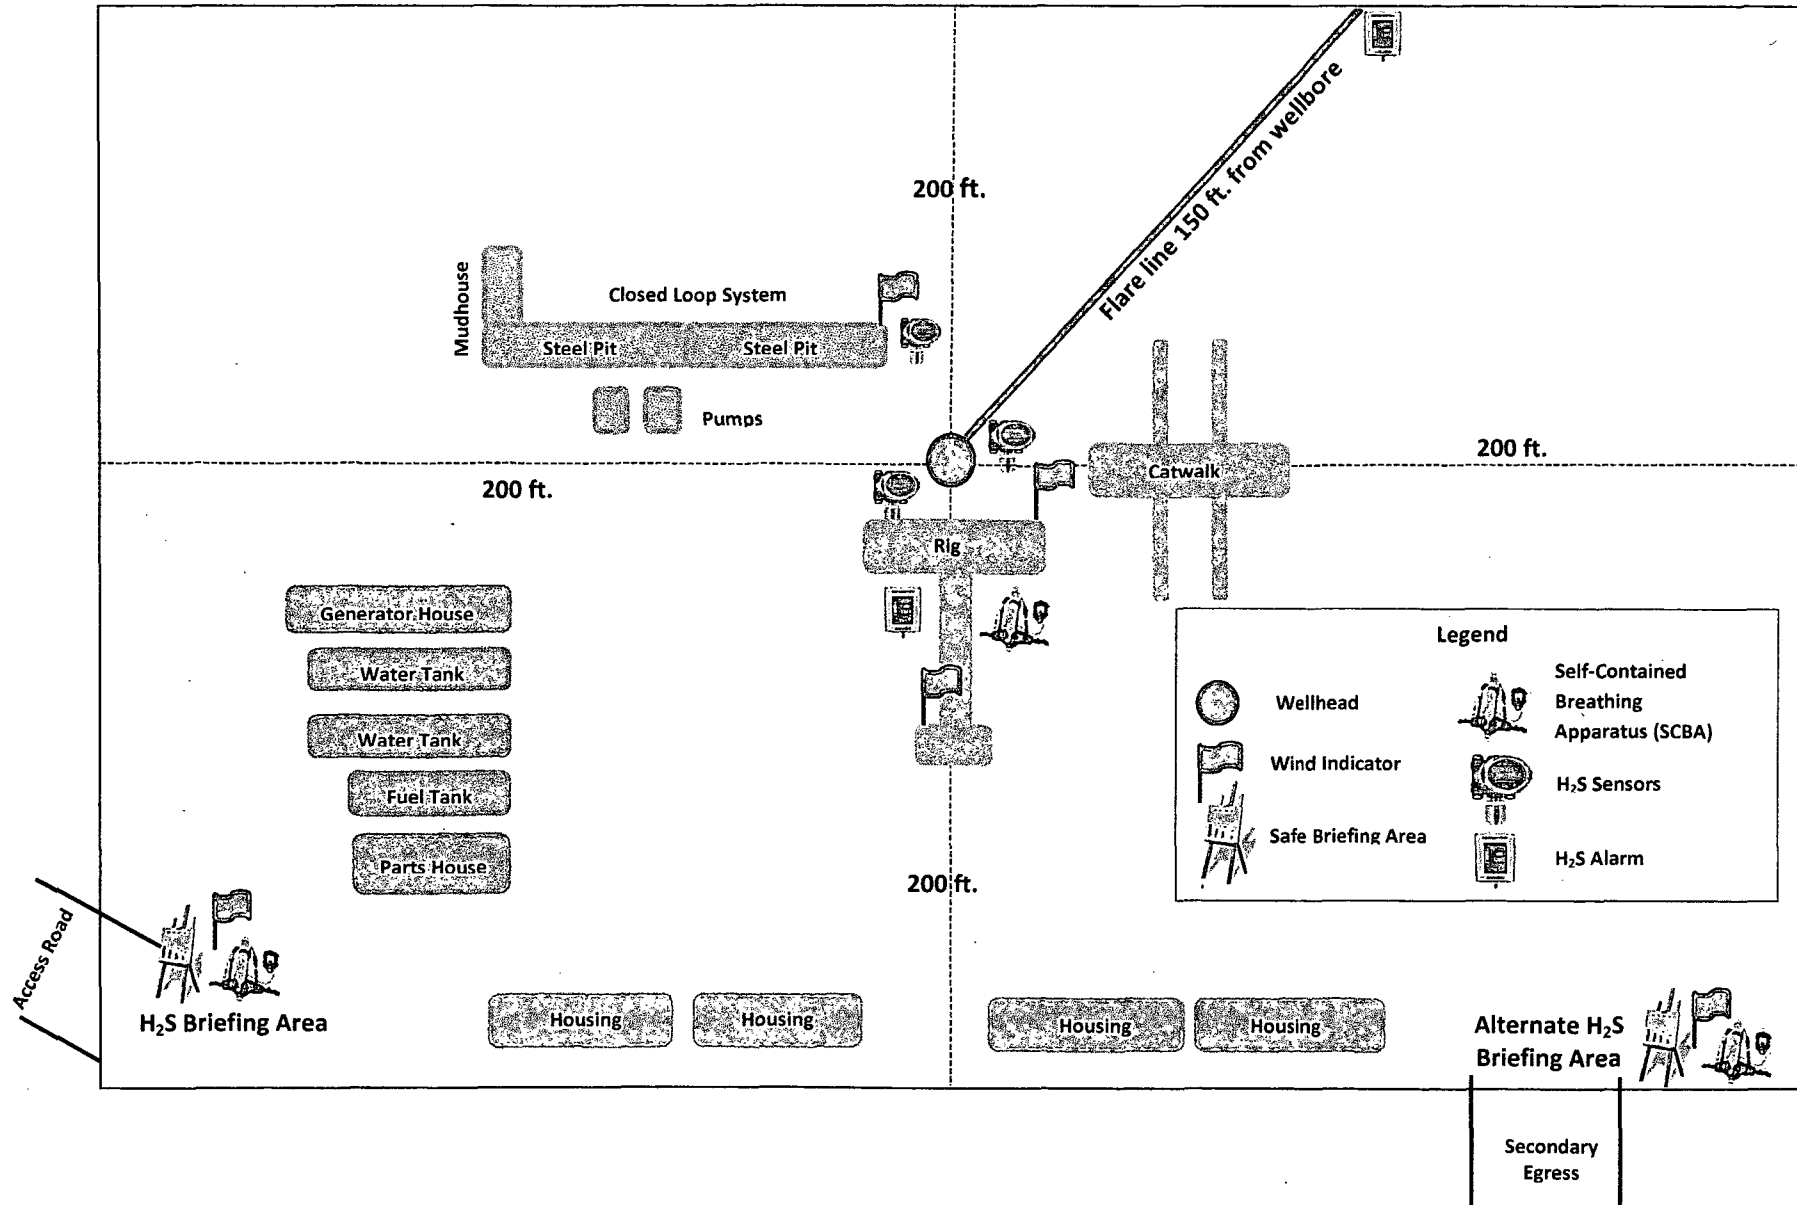


EXHIBIT C

Interim Reclamation & Production Facilities WINCHESTER FED COM 1H & USA 9 FED COM 3H V-DOOR EAST

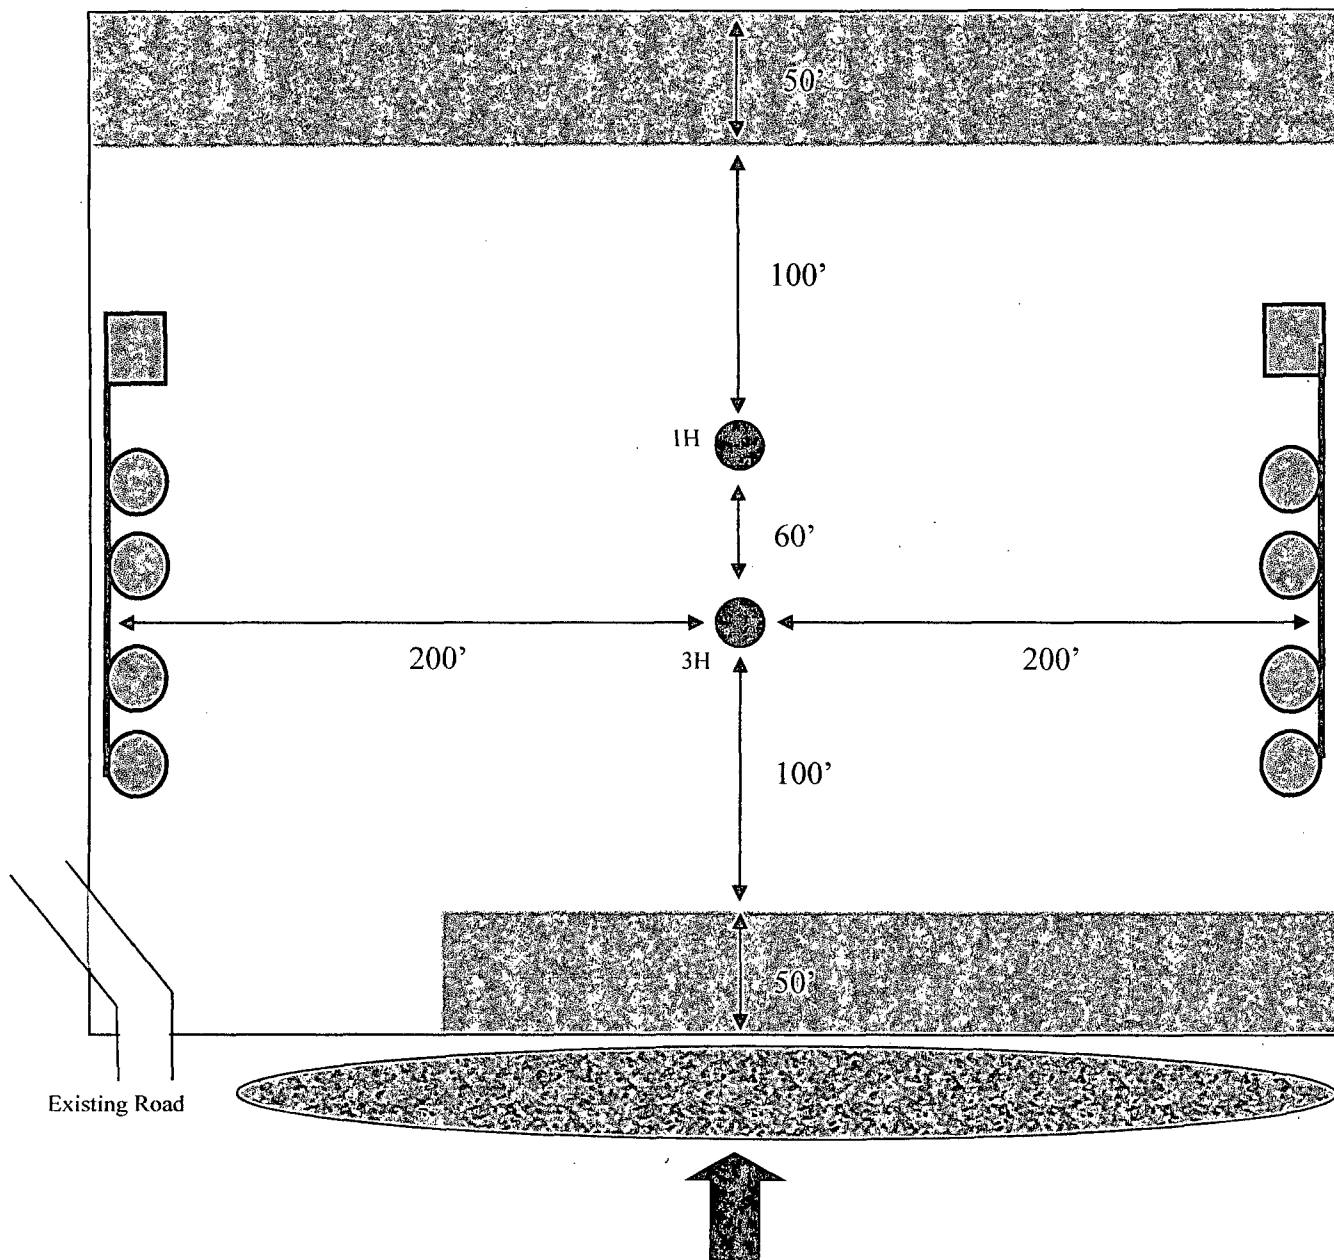

LEGEND

Well Bore



Topsoil



Interim Reclamation



Production Facilities



Berm



NORTH

SURFACE USE PLAN

CHI OPERATING, INC. WINCHESTER FEDERAL COM 1H

Surface Hole: 300 FNL & 330 FEL, Section 9, T. 20 S., R. 28 E.

Bottom Hole: 330 FNL & 330 FEL, Section 4, T. 20 S., R. 28 E.

Eddy County, New Mexico

This plan is submitted with form 3160-3, Application for Permit to Drill, covering the above described well. The purpose of this plan is to describe the location of the proposed well, the proposed construction activities and operations plan, the magnitude of the surface disturbance involved and the procedures to be followed in rehabilitating the surface after completion of the operations, so that a complete appraisal can be made of the environmental effect associated with the operations.

1. EXISTING ROADS:

A. DIRECTIONS: From Carlsbad, NM, go north on Illinois Camp Road for 8.5 miles, turn east on Angell Ranch Road for 2.25 miles, turn east on Lease Road for 1/4 mile. Turn north on lease road for 1.3 miles. Turn east northeast for 1.1 miles, turn south for 0.8 miles to the beginning point of location All existing roads are either paved or a caliche lease road.

B. See attached plats and maps provided by Basin Surveys.


C. The access route from Angel Ranch Road (County Road) to the well location is depicted on **EXHIBIT A**. The route highlighted in red will be the access which CHI Operating obtained a ROW for in July 2013 when the Winchester Fed Com 5H was applied for.

D. Existing roads on the access route will be improved and maintained to the standard set forth in Section 2 of this Surface Use Plan of Operations.

2. NEW OR RECONSTRUCTED ACCESS ROADS:

A. There will not be a new access road required due to southwest corner of pad extending onto existing lease road.

B. The maximum width of the driving surface will be 14 feet. The road will be crowned and ditched with a 2% slope from the tip of the crown to the edge of the driving surface. The ditches will be 1 foot deep with 3:1 slopes. The driving surface will be made of 6" rolled and compacted caliche.



Level Ground Section

C. Surface material will be native caliche. The average grade of the entire road will be approximately 3%.

D. Fence Cuts: No

E. Cattle guards: No

F. Turnouts: No

G. Culverts: No

H. Cuts and Fills: Not significant

I. Approximately 6 inches of topsoil (root zone) will be stripped from the proposed access road prior to any further construction activity. The topsoil that was stripped will be spread along the

edge of the road and within the ditch. The topsoil will be seeded with the proper seed mix designated by the BLM.

- J. The access road will be constructed and maintained as necessary to prevent soil erosion and accommodate all-weather traffic. The road will be crowned and ditched with water turnouts installed as necessary to provide for proper drainage along the access road route.
- K. The access road and associated drainage structures will be constructed and maintained in accordance with road guidelines contained in the joint BLM/USFS publication: Surface Operating Standards for Oil and Gas Exploration and Development, The Gold Book, Fourth Edition and/or BLM Manual Section 9113 concerning road construction standards on projects subject to federal jurisdiction.

3. LOCATION OF EXISTING WELLS:

See attached map (**EXHIBIT B**) showing all wells within a one-mile radius.

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES:

- A. In the event the well is found productive the company will place production facilities on the west and east portions of the 2 well pad (**See EXHIBIT C for production facility plat**).
- B. All permanent (on site six months or longer) aboveground structures constructed or installed on location and not subject to safety requirements will be painted to BLM specifications.
- C. Containment berms will be constructed completely around any production facilities designed to hold fluids. The containment berms will be constructed or compacted subsoil, be sufficiently impervious, hold 1 ½ times the capacity of the largest tank and away from cut or fill areas.

5. LOCATION AND TYPE OF WATER SUPPLY:

The well will be drilled using a combination of water mud systems as outlined in the Drilling Program. The water will be obtained from commercial water stations in the area and hauled to the location by transport truck using the existing and proposed roads shown in the attached survey plats. If a commercial water well is nearby, a temporary, surface poly line, will be laid along existing roads or other ROW easements and the water pumped to the well. No water well will be drilled on the location.

6. SOURCE OF CONSTRUCTION MATERIALS:

Any construction material that may be required for surfacing of the drill pad and access road will be from a contractor having a permitted source of materials within the general area. No construction materials will be removed from Federal lands without prior approval from the appropriate surface management agency. All roads will be constructed of 6" rolled and compacted caliche.

7. METHODS OF HANDLING WASTE DISPOSAL:

- A. The well will be drilled utilizing a closed loop mud system. Drill cuttings will be held in roll-off style mud boxes and taken to an NMOCD approved disposal site.
- B. Drilling fluids will be contained in steel mud pits.
- C. Water produced from the well during completion will be held temporarily in steel tanks and then taken to an NMOCD approved commercial disposal facility.
- D. Oil produced during operations will be stored in tanks until sold.
- E. Portable, self-contained chemical toilets will be provided for human waste disposal. Upon completion of operations, or as required, the toilet holding tanks will be pumped

and the contents thereof disposed of in an approved sewage disposal facility. All state and local laws and regulations pertaining to disposal of human and solid waste will be complied with. This equipment will be properly maintained during the drilling and completion operations and will be removed when all operations are complete.

- F. All trash, junk, and other waste materials will be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Immediately after drilling all debris and other waste materials on and around the well location, not contained in the trash cage will be cleaned up and removed from the location. No potentially adverse materials or substances will be left on the location.

8. ANCILLARY FACILITIES:

No campsite, airstrip, or other facilities will be built as a result of the operation of this well. No staging areas are needed.

9. WELL SITE LAYOUT:

- A. **Exhibit D** shows the dimensions of the proposed well pad.
B. The proposed two well pad size (2 wells 60' apart) will be 400' x 460' (**See EXHIBIT D**). There will be no reserve pit due to the well being drilled utilizing a closed loop mud system. The closed loop system will meet the NMOCD requirements 19.15.17.
C. The Basin Survey's plat, Form C-102 and **Exhibit D**, shows the direction of the pad at a V-Door East.
D. A 600' x 600' area has been staked and flagged.
E. All equipment and vehicles will be confined to the approved disturbed areas of this APD (i.e., access road, well pad, and topsoil storage areas)

10. PLANS FOR SURFACE RECLAMATION:

- A. After concluding the drilling and/or completion operations, if the well is found non-commercial, all the equipment will be removed, the surface material, caliche, will be removed from the well pad and road and transported to the original caliche pit or used for other roads. The original stock piled top soil will be returned to the pad and contoured, as close as possible, to the original topography. The access road will have the caliche removed and the road ripped, barricaded and seeded as directed by the BLM.
B. If the well is a producer, the portions of the pad not essential to production facilities or space required for workover operations, will be reclaimed and seeded as per BLM requirements for interim reclamation. (**SEE EXHIBIT C FOR INTERIM RECLAMATION PLAT FOR THIS WELL**)
C. Reclamation Performance Standards
The following reclamation performance standards will be met:

Final Reclamation – Includes disturbed areas where the original landform and a natural vegetative community will be restored and it is anticipated the site will not be redisturbed for future development.

- The original landform will be restored for all disturbed areas including well pads, production facilities, roads, pipelines, and utility corridors.
- A self-sustaining, vigorous, diverse, native (or otherwise approved) plant community will be established on the site, with a density sufficient to control erosion and invasion by non-native plants and to re-establish

wildlife habitat or forage production. At a minimum, the established plant community will consist of species included in the seed mix and/or desirable species occurring in the surrounding natural vegetation.

- Erosion features are equal to or less than surrounding area and erosion control is sufficient so that water naturally infiltrates into the soil and gully, headcutting, slumping, and deep or excessive rills (greater than 3 inches) are not observed.
- The site will be free of State- or county-listed noxious weeds, oil field debris and equipment, and contaminated soil. Invasive and non-native weeds are controlled.

Seeding:

- Seedbed Preparation. Initial seedbed preparation will consist of recontouring to the appropriate interim or final reclamation standard. All compacted areas to be seeded will be ripped to a minimum depth of 18 inches with a minimum furrow spacing of 2 feet, followed by recontouring the surface and then evenly spreading the stockpiled topsoil. Prior to seeding, the seedbed will be scarified to a depth of no less than 4 – 6 inches. If the site is to be broadcast seeded, the surface will be left rough enough to trap seed and snow, control erosion, and increase water infiltration.
- If broadcast seeding is to be used and is delayed, final seedbed preparation will consist of contour cultivating to a depth of 4 to 6 inches within 24 hours prior to seeding, dozer tracking, or other imprinting in order to break the soil crust and create seed germination micro-sites.
- Seed Application. Seeding will be conducted no more than two weeks following completion of final seedbed preparation. A certified weed-free seed mix designed by the BLM to meet reclamation standards will be used.
- If the site is harrowed or dragged, seed will be covered by no more than 0.25 inch of soil.

11. SURFACE OWNERSHIP:

- A. The surface is owned by the Bureau of Land Management. The surface is multiple use with the primary uses of the region for the grazing of livestock and the production of oil and gas.

12. OTHER INFORMATION:

- A. The area surrounding the well site is in a gentle sloped, shallow sandy gypsum loam, rolling hills type area. The vegetation consists of Mesquite, Yucca, with three-awns and some dropseed species.
- B. There is no permanent or live water in the immediate area.
- C. There are no dwellings within 2 miles of this location.
- D. A Class III Cultural Resources Examination by Boone Archaeological Services has been completed and the results forwarded to the BLM office.

13. BOND COVERAGE:

Bond Coverage is Nationwide; Bond Number NM-1616.

OPERATORS REPRESENTATIVE:

The CHI Operating, Inc. representatives responsible for ensuring compliance of the surface use plan are listed below:

Surface:

Barry W. Hunt – Permit Agent
1403 Spring Farm Place
Carlsbad, NM 88220
(575) 885-1417 (Home)
(575) 361-4078 (Cell)

Drilling & Production:

John Qualls – CHI Operating, Inc.
P.O. Box 1799
Midland, Tx. 79702
(432) 685-5001 (Office)
(432) 557-8774 (Cell)

ON-SITE PERFORMED ON 8/26/14 RESULTED IN PROPOSED LOCATION BEING MOVED 330 FT. SOUTH, DUE TO A SMALL KARST FEATURE. IT WAS AGREED TO TURN THE LOCATION TO A V-DOOR EAST. IT WAS FURTHER AGREED TO PLACE THE BATTERY ON THE WEST AND EAST SIDES OF THE PAD, TOP SOIL TO THE SOUTH AND INTERIM RECLAMATION WOULD BE THE NORTH AND SOUTH PORTIONS OF THE PAD.

PRESENT AT ON-SITE:

BARRY HUNT – PERMIT AGENT FOR CHI OPERATING, INC.
AMANDA LYNCH – BLM
BECKIE HILL - BOONE ARCHAEOLOGICAL SERVICES
BASIN SURVEYS

Chi Operating, Inc.

P. O. BOX 1799
MIDLAND, TEXAS 79702

August 27, 2012

Re: Authorization to Permit for Drilling and Right Of Way

To Whom it may concern,

Chi Operating, Inc. hereby authorizes Mr. Barry Hunt to serve as an agent for the purpose of permitting and obtaining Federal authority.

Gary Womack

Chi Energy, Inc.

432-634-8958 (C)

432-685-5001 (O)

Well-Site Evaluation Field Form

Operator Name: Chi Well Name Winchester 4 Fed Com 1A
 SHL: Section 4 T. 20S. R. 28E. Footage 1000 330 FS L & 330 FE L
 Well Type: Horizontal ☒ Vertical ☒ Gas ☒ Other _____ NOS/APD Received? ☒ Yes ☐ No
 Surface Management Agency (SMA): BLM ☒ STATE ☐ Other _____ SMA Contacted? ☒ Yes ☐ No
 Operator Representative/ Contact Name: Barry Hunt Phone 575 261 4785
 BLM Onsite Representatives Lynch Date 7/17/14

Description & Topography: (cut & fill, etc.)

Fairly flat w/ small playa SW avoid by 20ft fringed
due north pipeline cant move anymore very flat ^{of green grass}

Soils: (reseeding strips, etc.) Simona gravelly fine sandy loam 0-3'Cave Area: High playa could possibly be karst but no signsHydrogeology: (playas, floodplain, drainages, erosive soils, plant indicators, etc.) playas thru out

Section


Wildlife: (habitat, LPC, SDL, etc.) 0Range Improvements: (fences, etc.) angle draw 1105 fence line along E

Well Infrastructure

V-Door Direction: E Topsoil: NorthPad Size: 400 x 400Road Route: SW to WProd. Facility Placement: EastInterim Rec: W N 100' A

Other: _____

Evaluation: (Moved?) _____

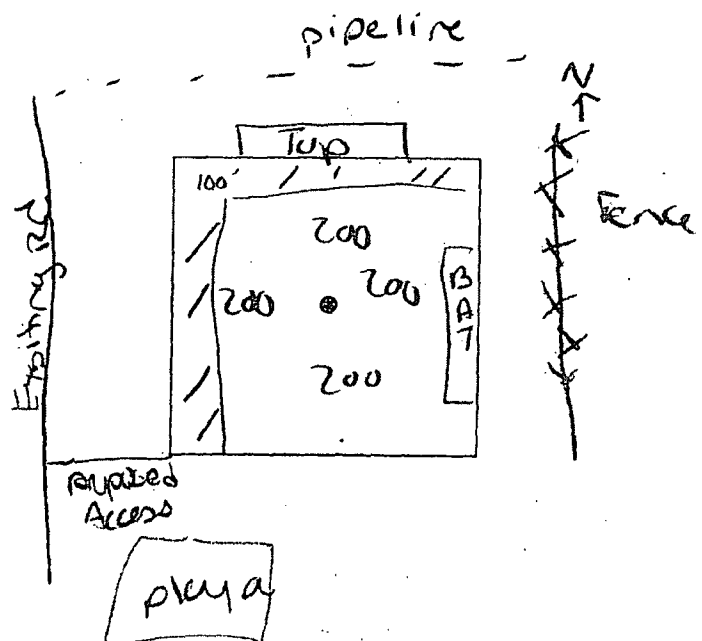

PECOS DISTRICT CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Chi Operating, Inc.
LEASE NO.:	NM13232A
WELL NAME & NO.:	Winchester Federal Com 1H
SURFACE HOLE FOOTAGE:	300'/N & 330'/E
BOTTOM HOLE FOOTAGE:	330'/N & 330'/E, SEC. 4
LOCATION:	Section 9, T.20 S., R.28 E., NMPM
COUNTY:	Eddy County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Communitization Agreement
 - Cave/Karst
- ☐ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☐ **Road Section Diagram**
- ☒ **Drilling**
 - Cement Requirements
 - High Cave/Karst
 - Logging Requirements
 - Waste Material and Fluids
- ☐ **Production (Post Drilling)**
 - Well Structures & Facilities
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Communitization Agreement

A Communitization Agreement covering the acreage dedicated to this well must be filed for approval with the BLM. The effective date of the agreement shall be prior to any sales. In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

Cave and Karst

Cave/Karst Surface Mitigation

The following stipulations will be applied to minimize impacts during construction, drilling and production.

Construction:

In the advent that any underground voids are opened up during construction activities, construction activities will be halted and the BLM will be notified immediately.

No Blasting:

No blasting will be utilized for pad construction. The pad will be constructed and leveled by adding the necessary fill and caliche.

Pad Berming:

The entire perimeter of the well pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad.

- The compacted berm shall be constructed at a minimum of 12 inches high with impermeable mineral material (e.g. caliche).
- No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad.
- The topsoil stockpile shall be located outside the bermed well pad.
- Topsoil, either from the well pad or surrounding area, shall not be used to construct the berm.
- No storm drains, tubing or openings shall be placed in the berm.
- If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.
- The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed.
- Any access road entering the well pad shall be constructed so that the integrity of the berm height surrounding the well pad is not compromised. (Any access road crossing the berm cannot be lower than the berm height.)

Tank Battery Liners and Berms:

Tank battery locations and all facilities will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing to prevent tears or punctures. Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank.

Leak Detection System:

A method of detecting leaks is required. The method could incorporate gauges to measure loss, situating valves and lines so they can be visually inspected, or installing electronic sensors to alarm when a leak is present. Leak detection plan will be submitted to BLM for approval.

Automatic Shut-off Systems:

Automatic shut off, check valves, or similar systems will be installed for pipelines and tanks to minimize the effects of catastrophic line failures used in production or drilling.

Cave/Karst Subsurface Mitigation

The following stipulations will be applied to protect cave/karst and ground water concerns:

Rotary Drilling with Fresh Water:

Fresh water will be used as a circulating medium in zones where caves or karst features are expected. SEE ALSO: Drilling COAs for this well.

Directional Drilling:

Kick off for directional drilling will occur at least 100 feet below the bottom of the cave occurrence zone. SEE ALSO: Drilling COAs for this well.

Lost Circulation:

ALL lost circulation zones from the surface to the base of the cave occurrence zone will be logged and reported in the drilling report.

Regardless of the type of drilling machinery used, if a void of four feet or more and circulation losses greater than 70 percent occur simultaneously while drilling in any cave-bearing zone, the BLM will be notified immediately by the operator. The BLM will assess the situation and work with the operator on corrective actions to resolve the problem.

Abandonment Cementing:

Upon well abandonment in high cave karst areas additional plugging conditions of approval may be required. The BLM will assess the situation and work with the operator to ensure proper plugging of the wellbore.

Pressure Testing:

Annual pressure monitoring will be performed by the operator on all casing annuli and reported in a sundry notice. If the test results indicated a casing failure has occurred, remedial action will be undertaken to correct the problem to the BLM's approval.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS**Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill out sloping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

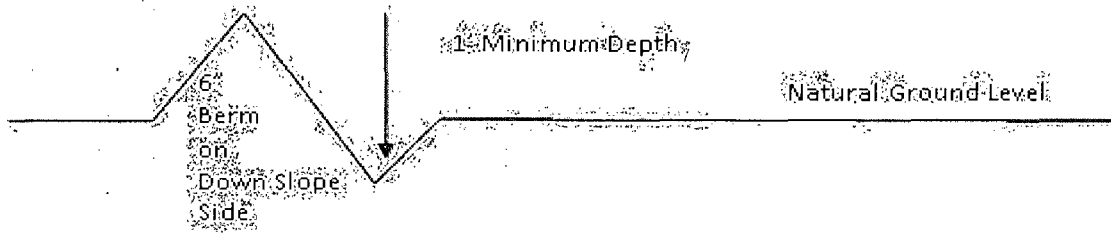

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattleguards

An appropriately sized cattleguard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattleguards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

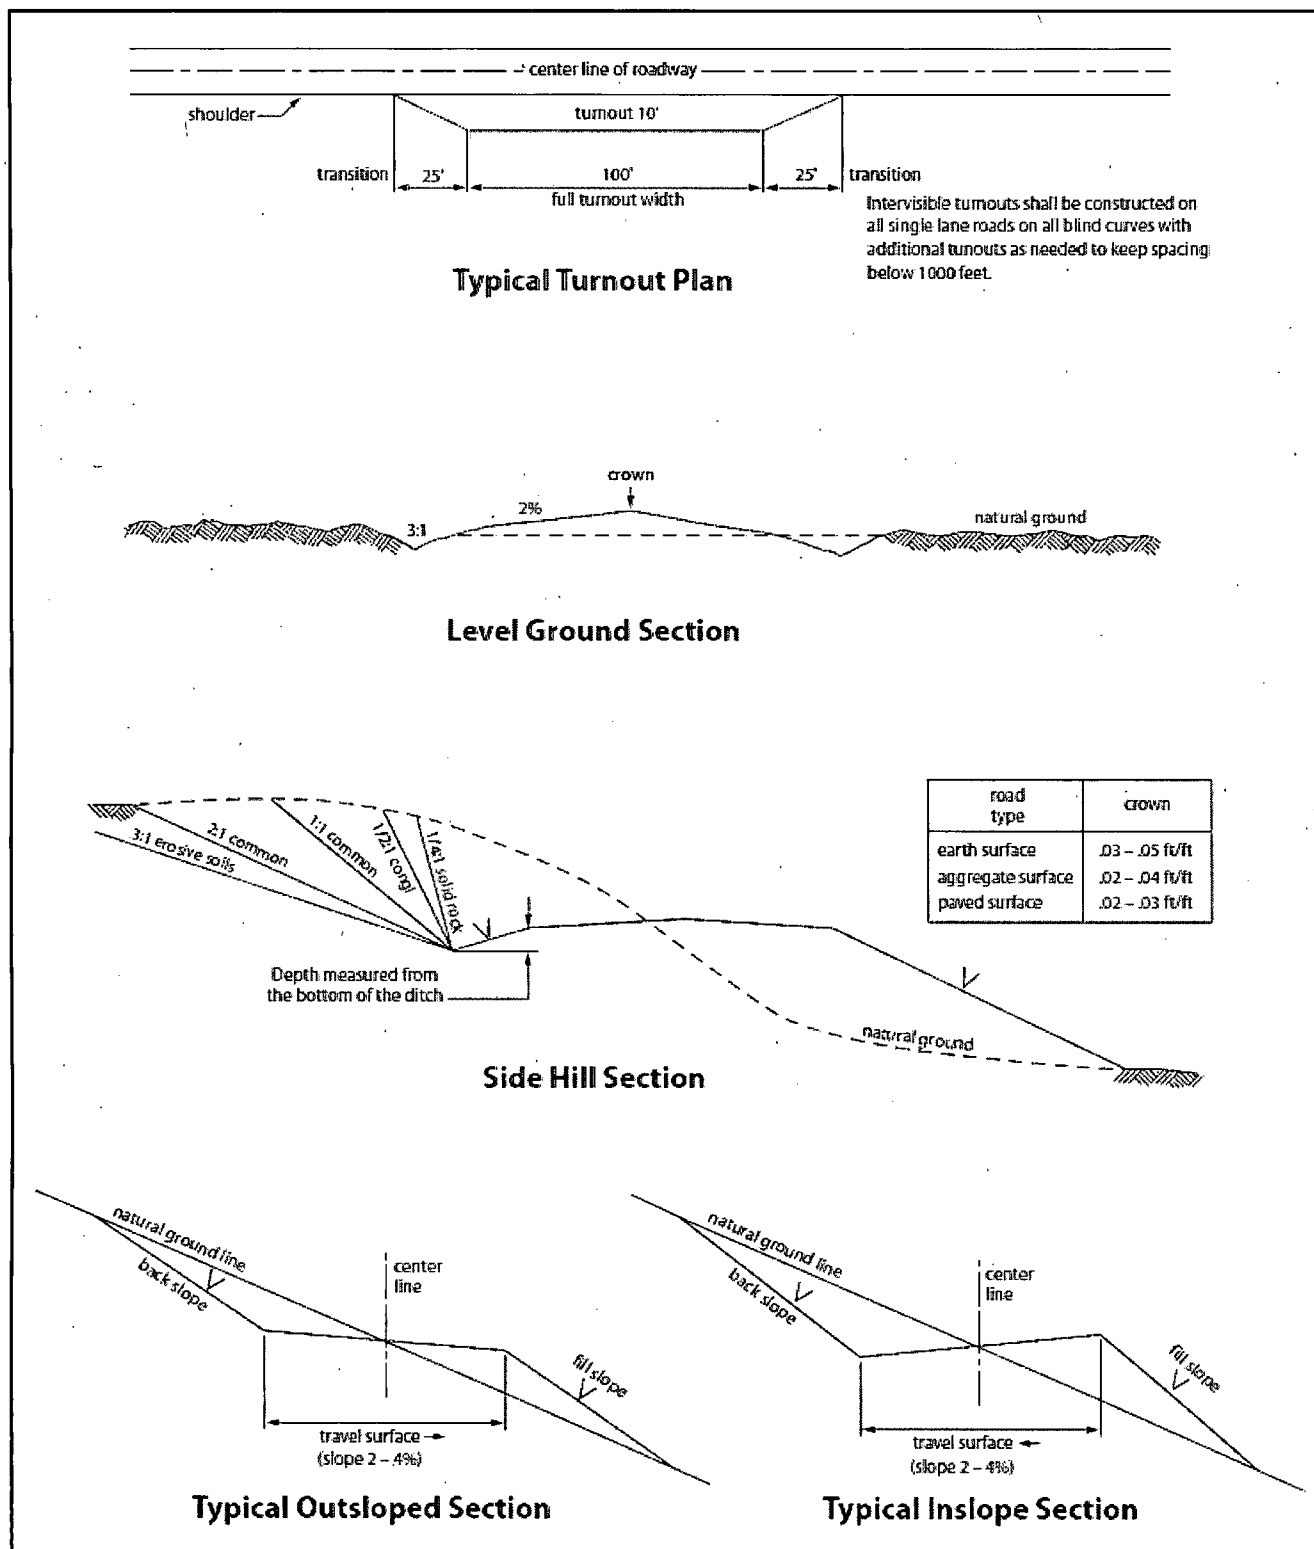


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. DRILLING

A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ **Eddy County**

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

1. **Hydrogen Sulfide (H₂S) monitors shall be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.**
2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval. **If the drilling rig is removed without approval – an Incident of Non-Compliance will be written and will be a “Major” violation.**
3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works is located, this does not include the dog house or stairway area.
4. **The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.**

B. CASING

Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need

prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.).

Centralizers required on surface casing per Onshore Order 2.III.B.1.f.

Wait on cement (WOC) for Water Basin:

After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least **8 hours**. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

High Cave/Karst

Possibility of lost circulation in the Grayburg, San Andres, Capitan Reef (if encountered), Delaware, and Bone Spring.

1. The 13-3/8 inch surface casing shall be set at approximately **360 feet** (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface. **If salt is encountered, set casing at least 25 feet above the salt.**
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.**
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the **9-5/8 inch** intermediate casing is: **(Set casing at approximately 2950')**

- ☒ Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst.**

3. The minimum required fill of cement behind the 7 inch production casing is:

- ☒ Cement to surface. If cement does not circulate, contact the appropriate BLM office.

4. Cement not required on the 4-1/2" casing. **Packer system being used.**
5. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

C. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **3000 (3M) psi (Installing 5M testing to 3,000 psi)**.
 - a. **For surface casing only:** If the BOP/BOPE is to be tested against casing, the wait on cement (WOC) time for that casing is to be met (see WOC statement at start of casing section). Independent service company required.
3. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. The tests shall be done by an independent service company utilizing a test plug **not a cup or J-packer**. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (18 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- c. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- d. The results of the test shall be reported to the appropriate BLM office.
- e. All tests are required to be recorded on a calibrated test chart. **A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.**
- f. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.

D. DRILL STEM TEST

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

E. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

CRW 071615

VIII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the

largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

IX. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

X. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well.

Seed Mixture 1, for Loamy Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (small/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

Species	lb/acre
Plains lovegrass (<i>Eragrostis intermedia</i>)	0.5
Sand dropseed (<i>Sporobolus cryptandrus</i>)	1.0
Sideoats grama (<i>Bouteloua curtipendula</i>)	5.0
Plains bristlegrass (<i>Setaria macrostachya</i>)	2.0

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed