

NM OIL CONSERVATION

ARTESIA DISTRICT

HIGH CAVEKARST

AUG 30 2015 Artesia

ATS-15-93

Form 3160-3
(March 2012)

RECEIVED

FORM APPROVED
OMB No. 1004-0137
Expires October 31, 2014

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT


APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NMMN-0557370
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name N/A
2. Name of Operator LIME ROCK RESOURCES II-A, L. P.		7. If Unit or CA Agreement, Name and No. N/A
3a. Address 1111 BAGBY ST., SUITE 4600 HOUSTON, TX 77002	3b. Phone No. (include area code) 713 292-9528	8. Lease Name and Well No. EAGLE 34 B FEDERAL 73
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface 745' FNL & 1650' FEL At proposed prod. zone 990' FNL & 1650' FEL		9. API Well No. 43279 30-015-
14. Distance in miles and direction from nearest town or post office* 8 AIR MILES SE OF ARTESIA, NM		10. Field and Pool, or Exploratory RED LAKE; GLORIETA-YESO, NE
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) SHL: 990' BHL: 990'	16. No. of acres in lease 720	11. Sec., T. R. M. or Blk. and Survey or Area NWNE 34-17S-27E
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. SHL: 704' (Eag. 34 B 52) BHL: 660' (ditto)	19. Proposed Depth TVD: 5200' & MD: 5210'	12. County or Parish EDDY
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3,529.4' UNGRADED	22. Approximate date work will start* 12/20/2014	13. State NM
17. Spacing Unit dedicated to this well NWNE 34-17S-27E		
20. BLM/BIA Bond No. on file NMB-000797 & NMB-000817		
23. Estimated duration 1 MONTH		

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM. |

25. Signature 	Name (Printed/Typed) BRIAN WOOD (PHONE: 505 466-8120)	Date 10/11/2014
---	--	--------------------

Title CONSULTANT (FAX: 505 466-9682)

Approved by (Signature) <i>Is/George MacDonelli</i>	Name (Printed/Typed)	Date JUL 24 2015
---	----------------------	---------------------

Title FIELD MANAGER	Office CARLSBAD FIELD OFFICE
------------------------	---------------------------------

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

APPROVAL FOR TWO YEARS

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

Roswell Controlled Water Basin

AWD
8/13/15

**APPROVAL SUBJECT TO
GENERAL REQUIREMENTS
AND SPECIAL STIPULATIONS
ATTACHED**

**SEE ATTACHED FOR
CONDITIONS OF APPROVAL**

Lime Rock Resources II-A, L.P.
Eagle 34 B Federal 73
SHL: 745' FNL & 1650' FEL
BHL: 990' FNL & 1650' FEL
Sec. 34, T. 17 S., R. 27 E., Eddy County, NM

SURFACE PLAN PAGE 4

REPRESENTATION

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U. S. C. 1001 for the filing of false statements. Executed this 11th day of October, 2014.



Brian Wood, Consultant
Permits West, Inc.

37 Verano Loop, Santa Fe, NM 87508

(505) 466-8120

FAX: (505) 466-9682

Cellular: (505) 699-2276

Field representative will be:

Spencer Cox, Production Engineer

Lime Rock Resources II-A, L.P.

1111 Bagby St., Suite 4600

Houston, TX 77002

Office: (713) 292-9528

Mobile: (432) 254-5140

FAX: (713) 292-9578

District I
1625 N. French Dr., Hobbs, NM 88249
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1600 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015- 43279	² Pool Code 96836	³ Pool Name RED LAKE; GLORIETA-YESO, NORTHEAST
⁴ Property Code 308948	⁵ Property Name EAGLE 34 B FEDERAL	
⁷ OGRID No. 277558	⁸ Operator Name LIME ROCK RESOURCES II-A, L.P.	⁶ Well Number 73
		⁹ Elevation 3529.4

¹⁰ Surface Location


U.I. or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	34	17 S	27 E		745	NORTH	1650	EAST	EDDY

¹¹ Bottom Hole Location If Different From Surface

U.I. or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	34	17 S	27 E		990	NORTH	1650	EAST	EDDY

¹² Dedicated Acres 40	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
-------------------------------------	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

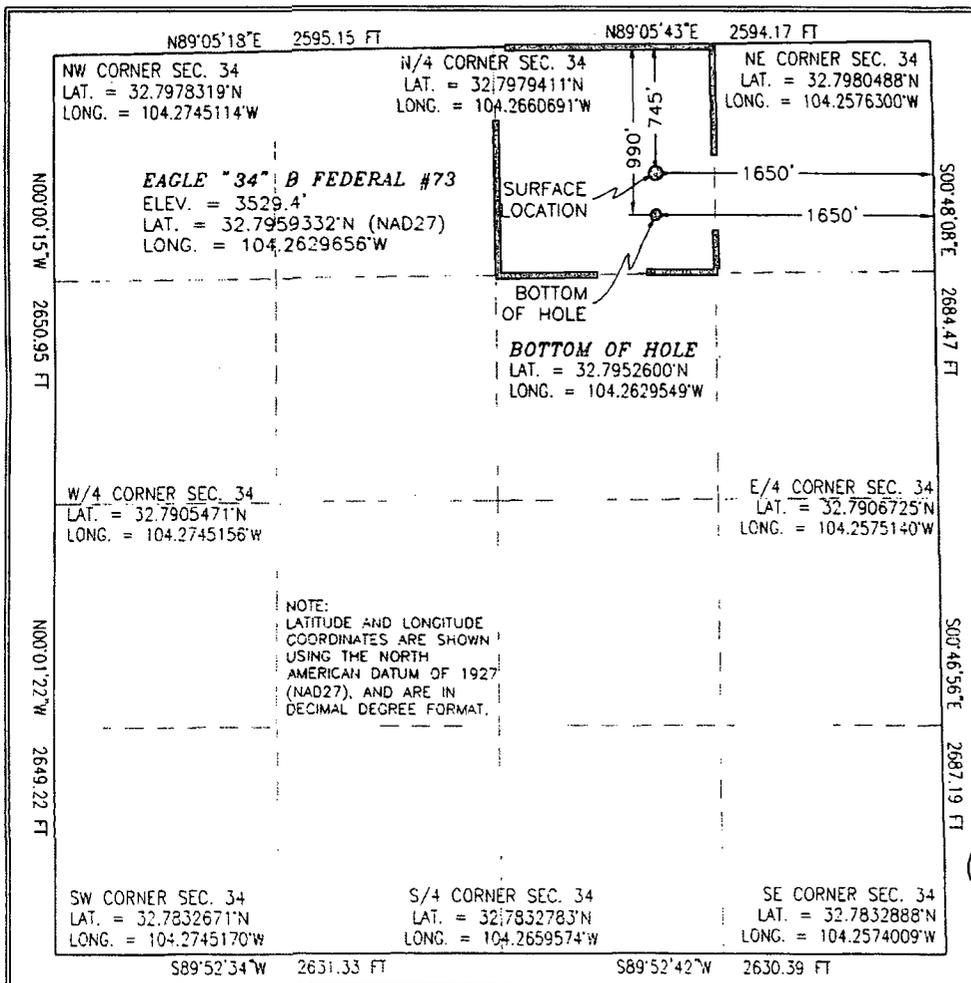

¹⁷ OPERATOR CERTIFICATION
I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Brian Wood 10-11-14
Signature Date

BRIAN WOOD
Printed Name


brian@permitswest.com
E-mail Address

¹⁸ SURVEYOR CERTIFICATION
I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

DECEMBER 9, 2013
Date of Survey


Filimon F. Jakamillo
Signature and Seal of Professional Surveyor

Certificate Number: FILIMON F. JAKAMILLO, PLS 12797
SURVEY NO. 2285

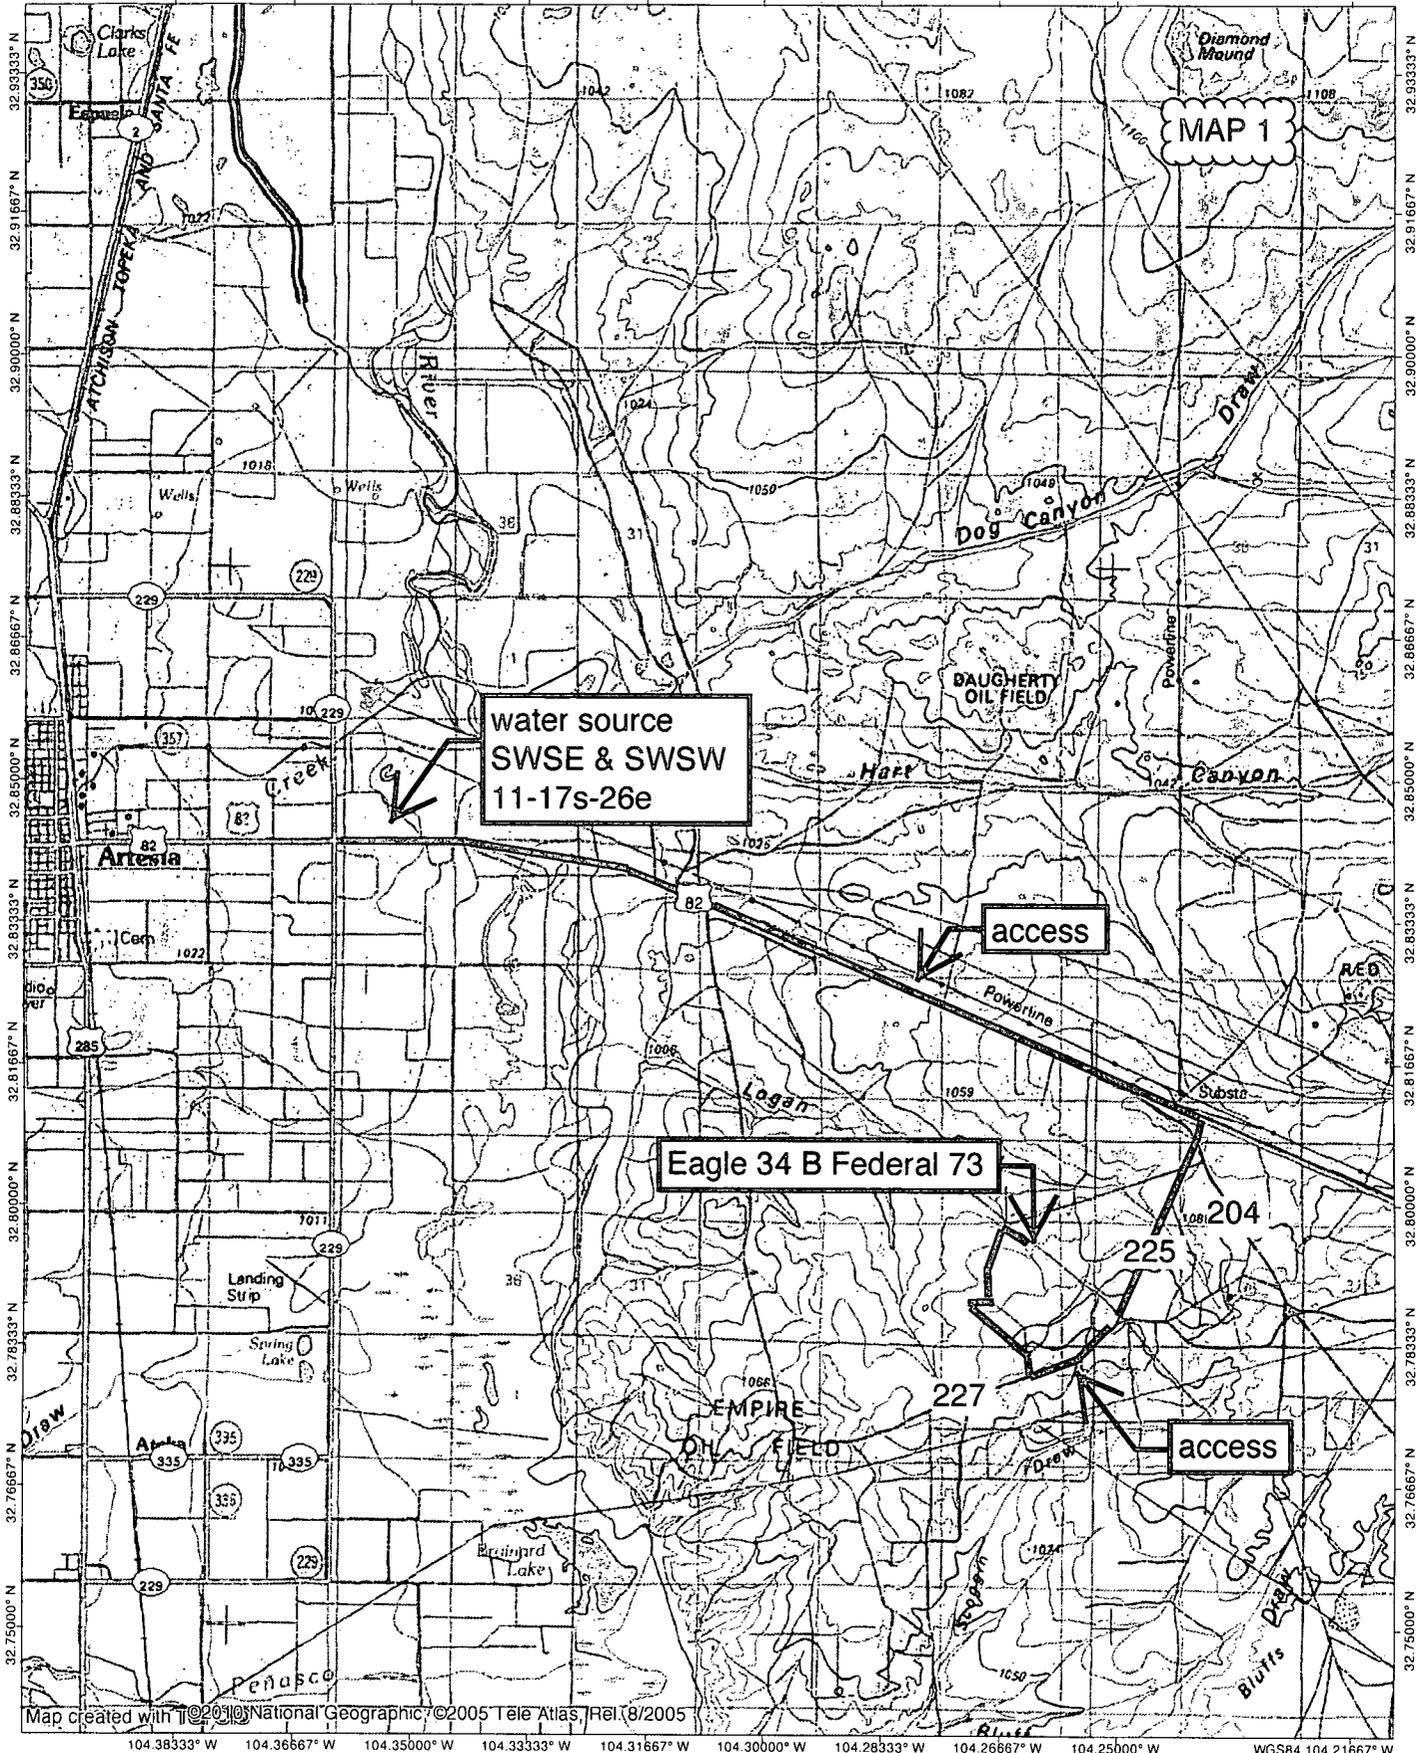

Map created with T@2010 National Geographic, ©2005 Tele Atlas, Rel. 8/2005


NATIONAL GEOGRAPHIC



TN MN

7.5°

07/20/13

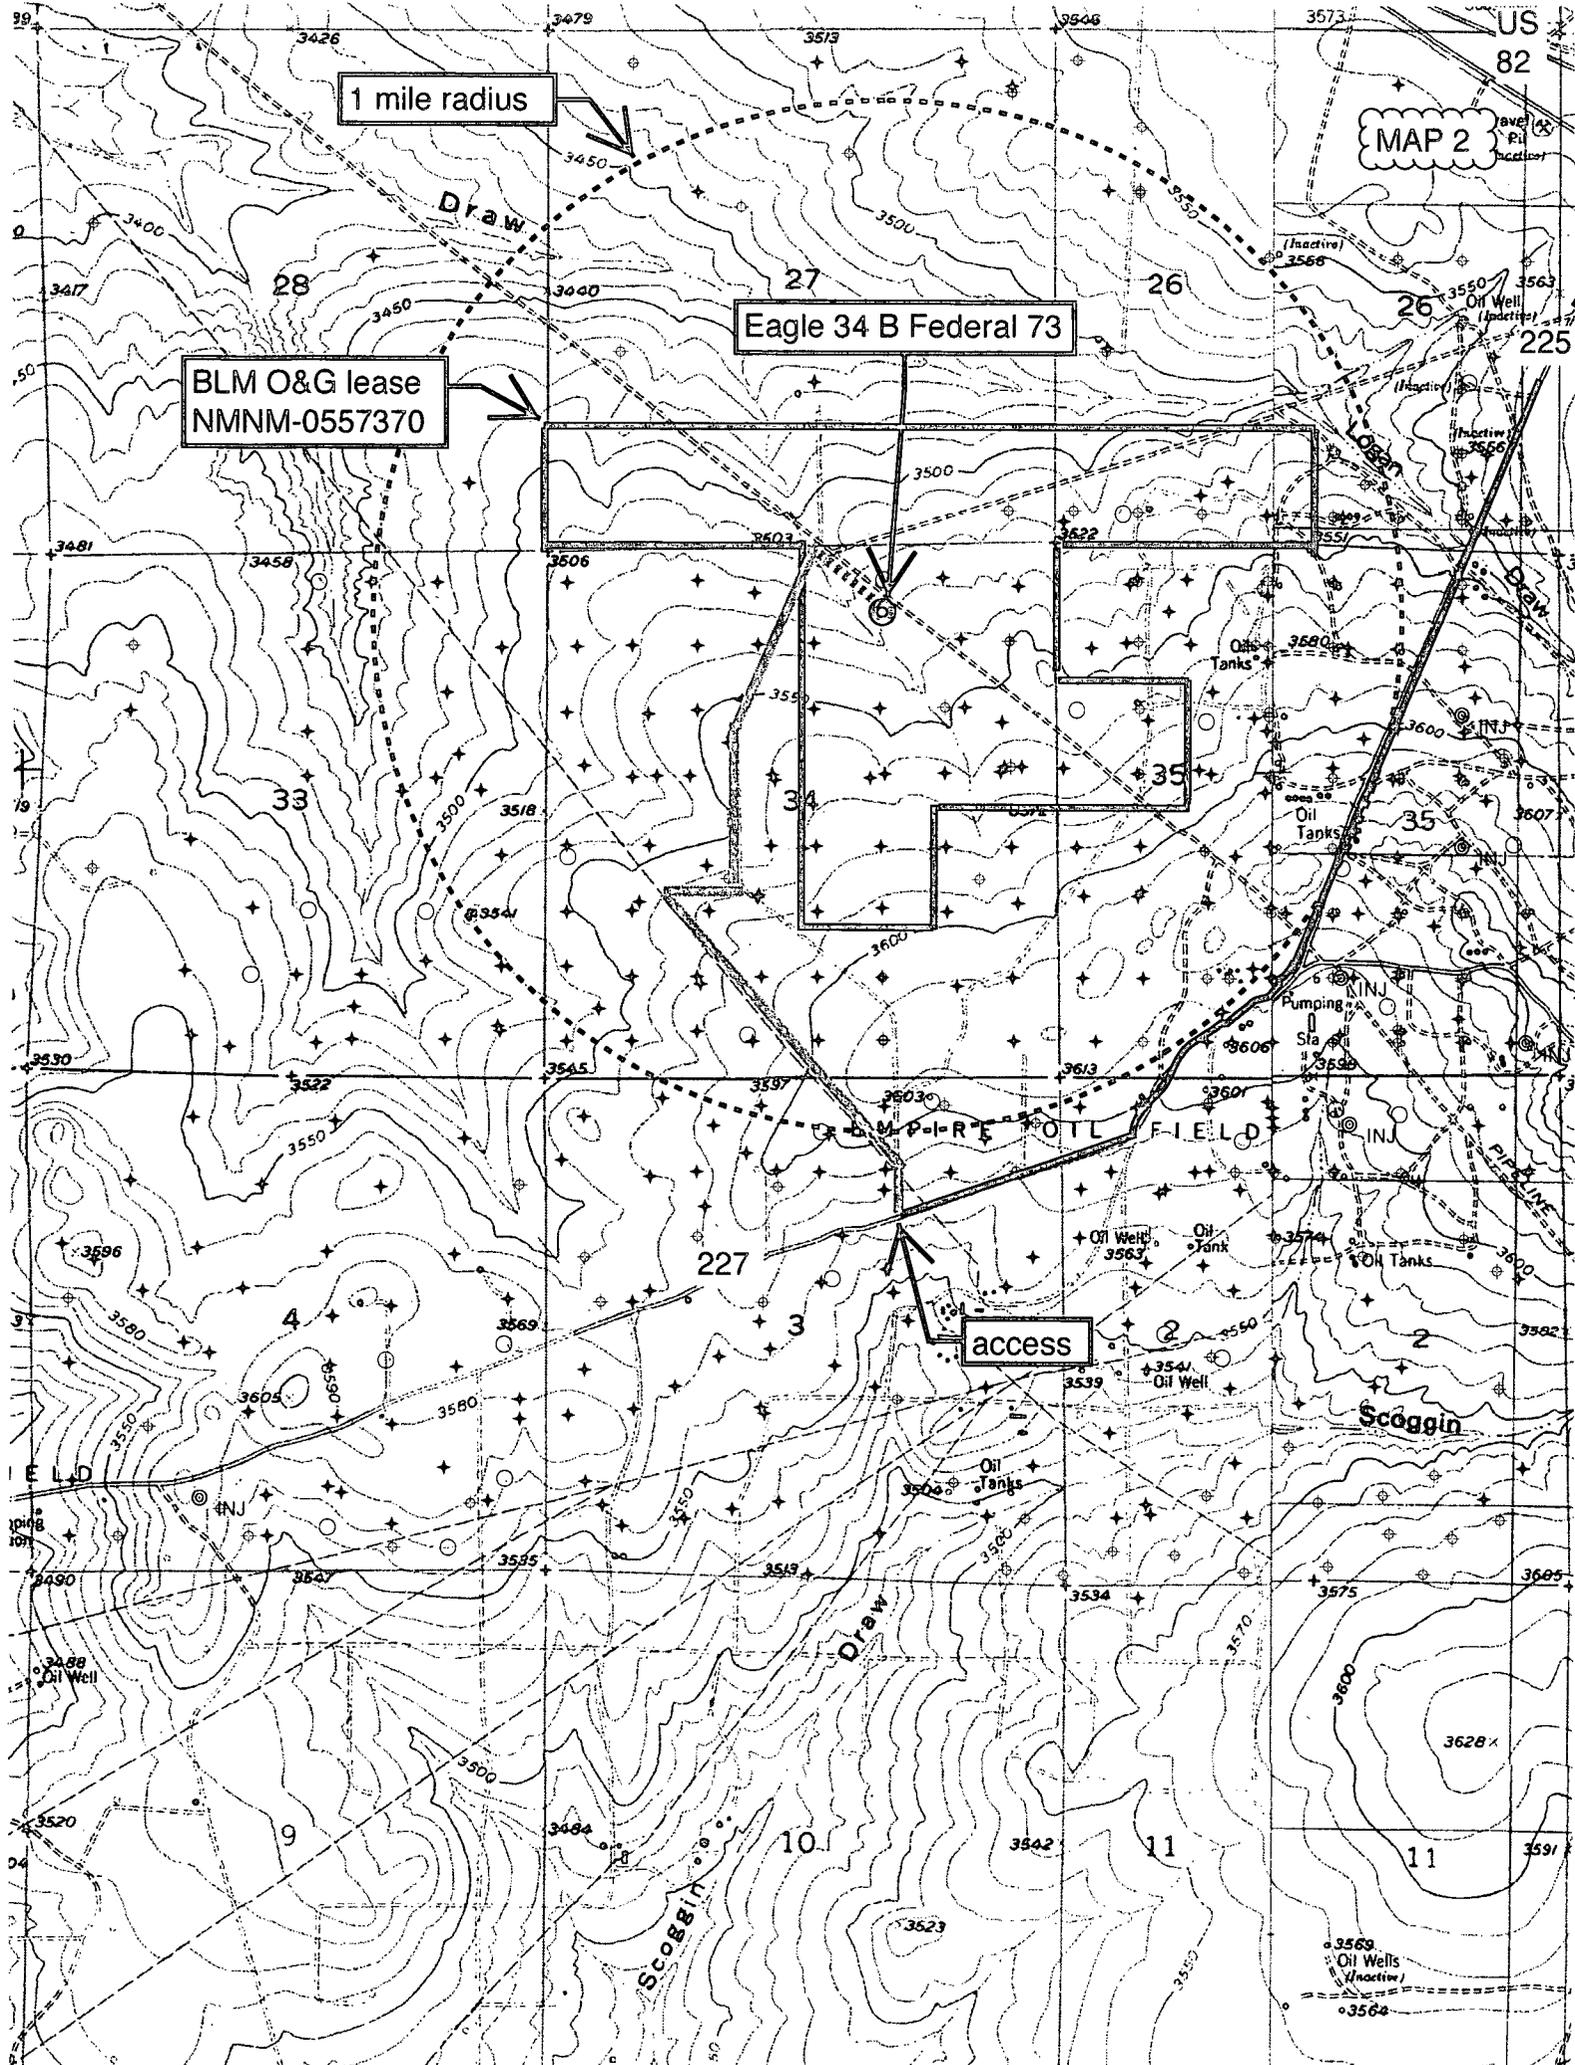

1 mile radius

MAP 2

Eagle 34 B Federal 73


BLM O&G lease
NMNM-0557370


access

Scoggin Draw

Scoggin

US
82

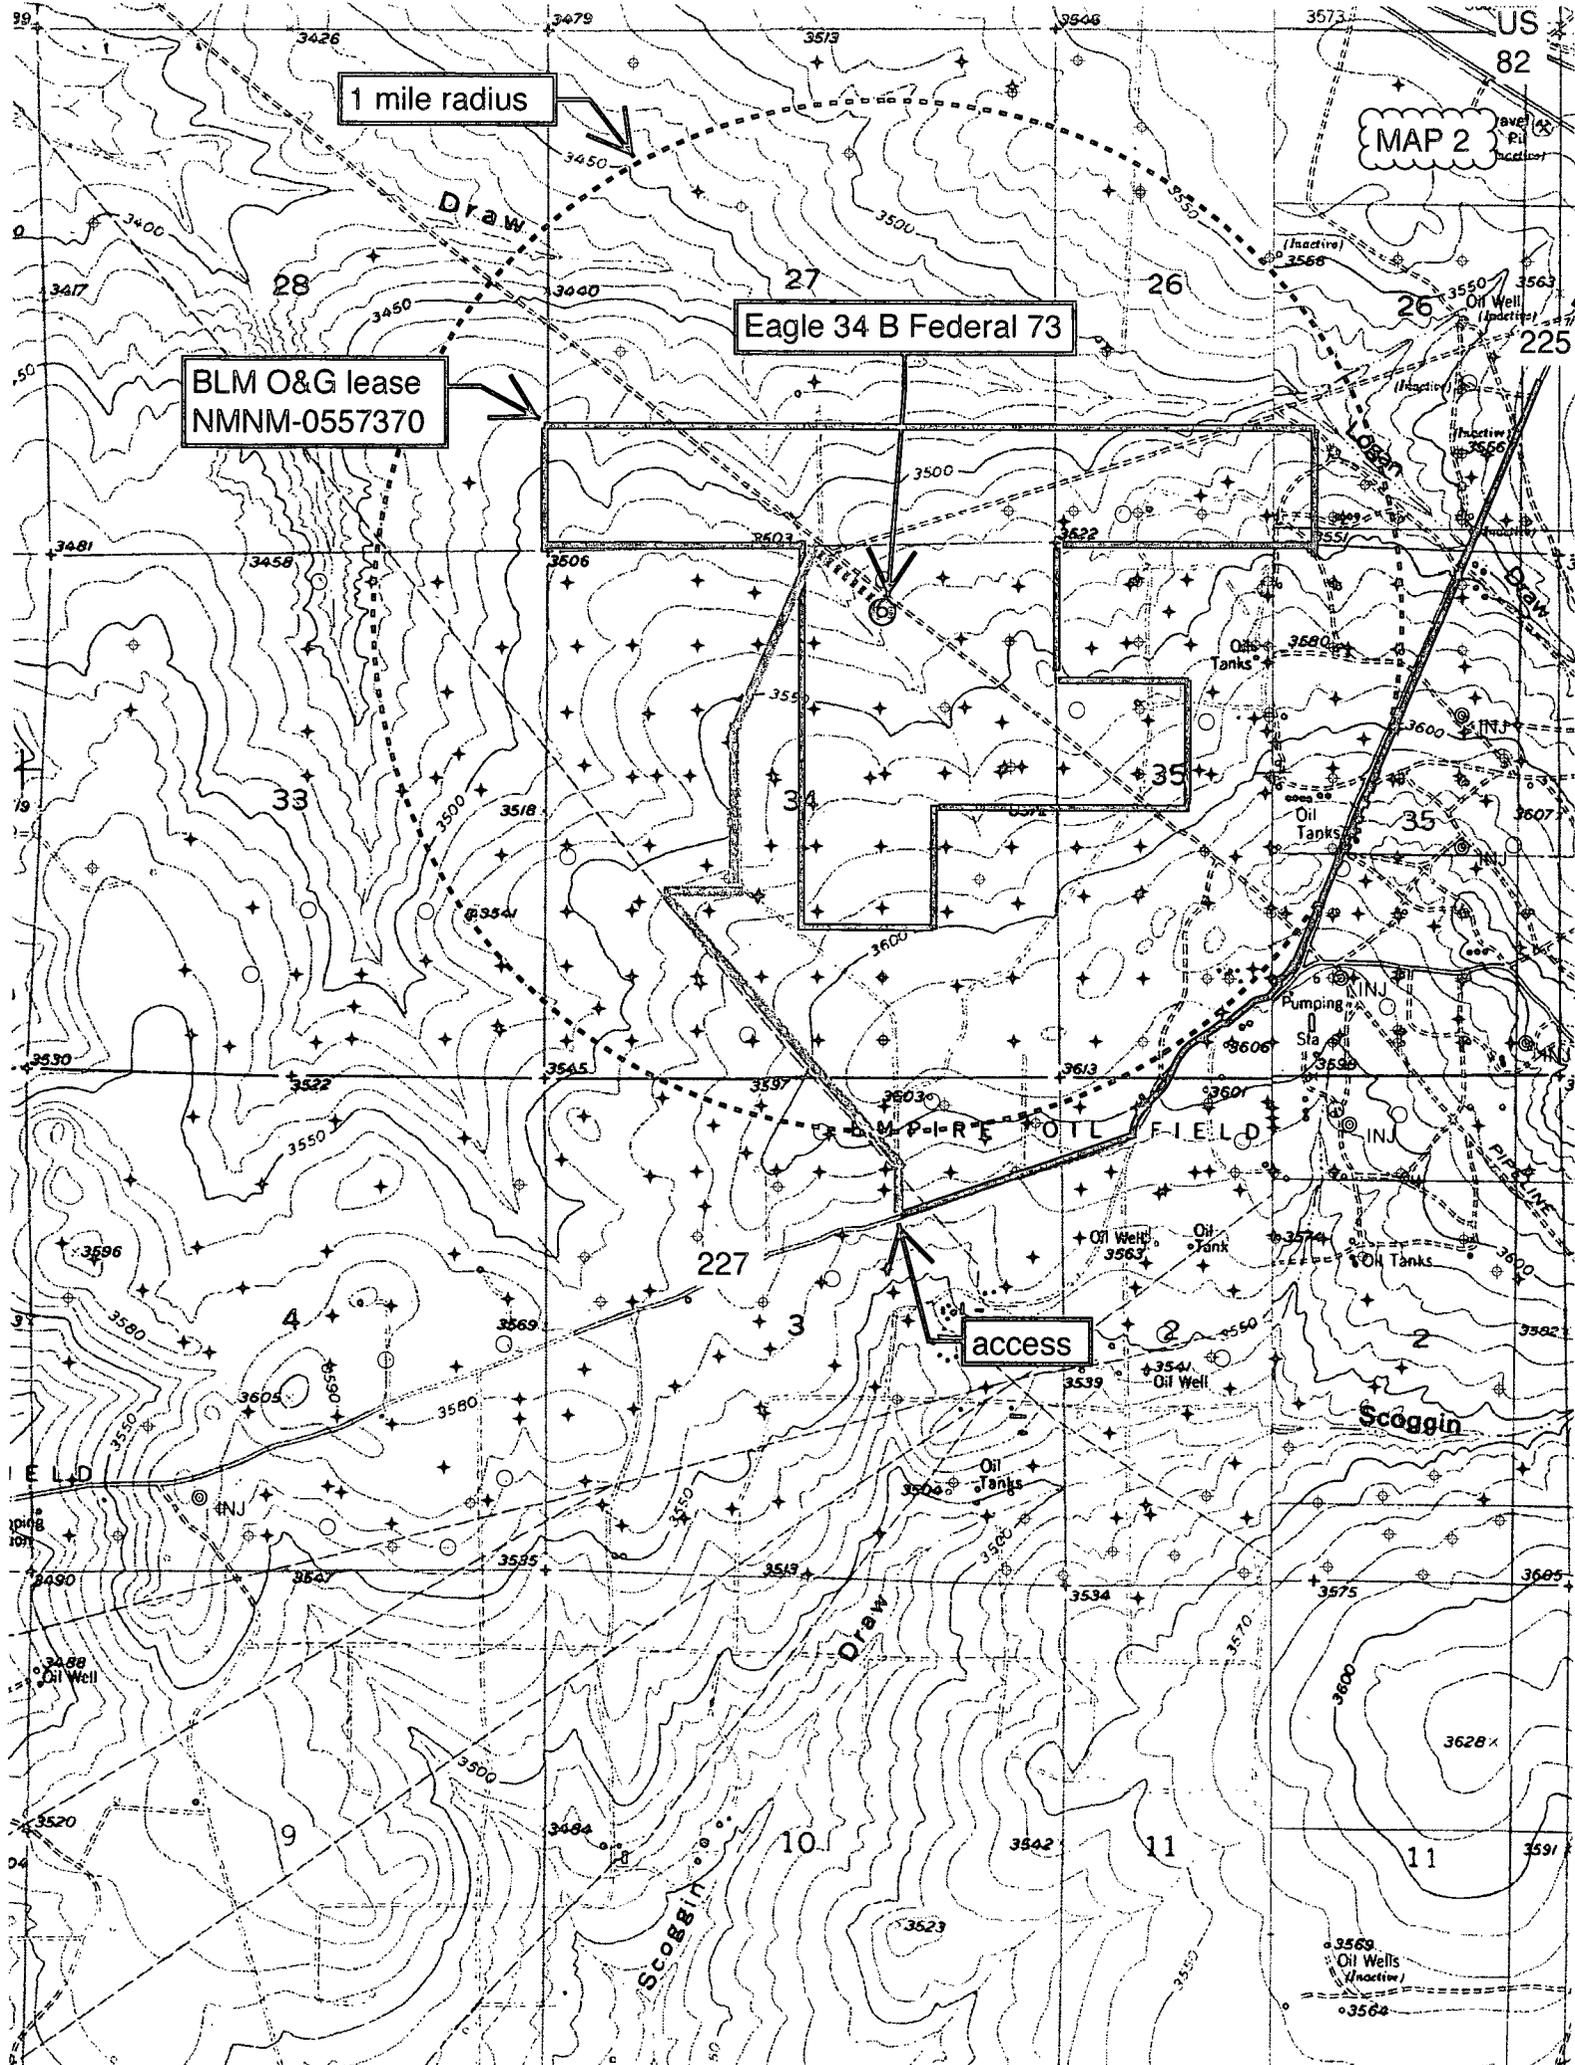

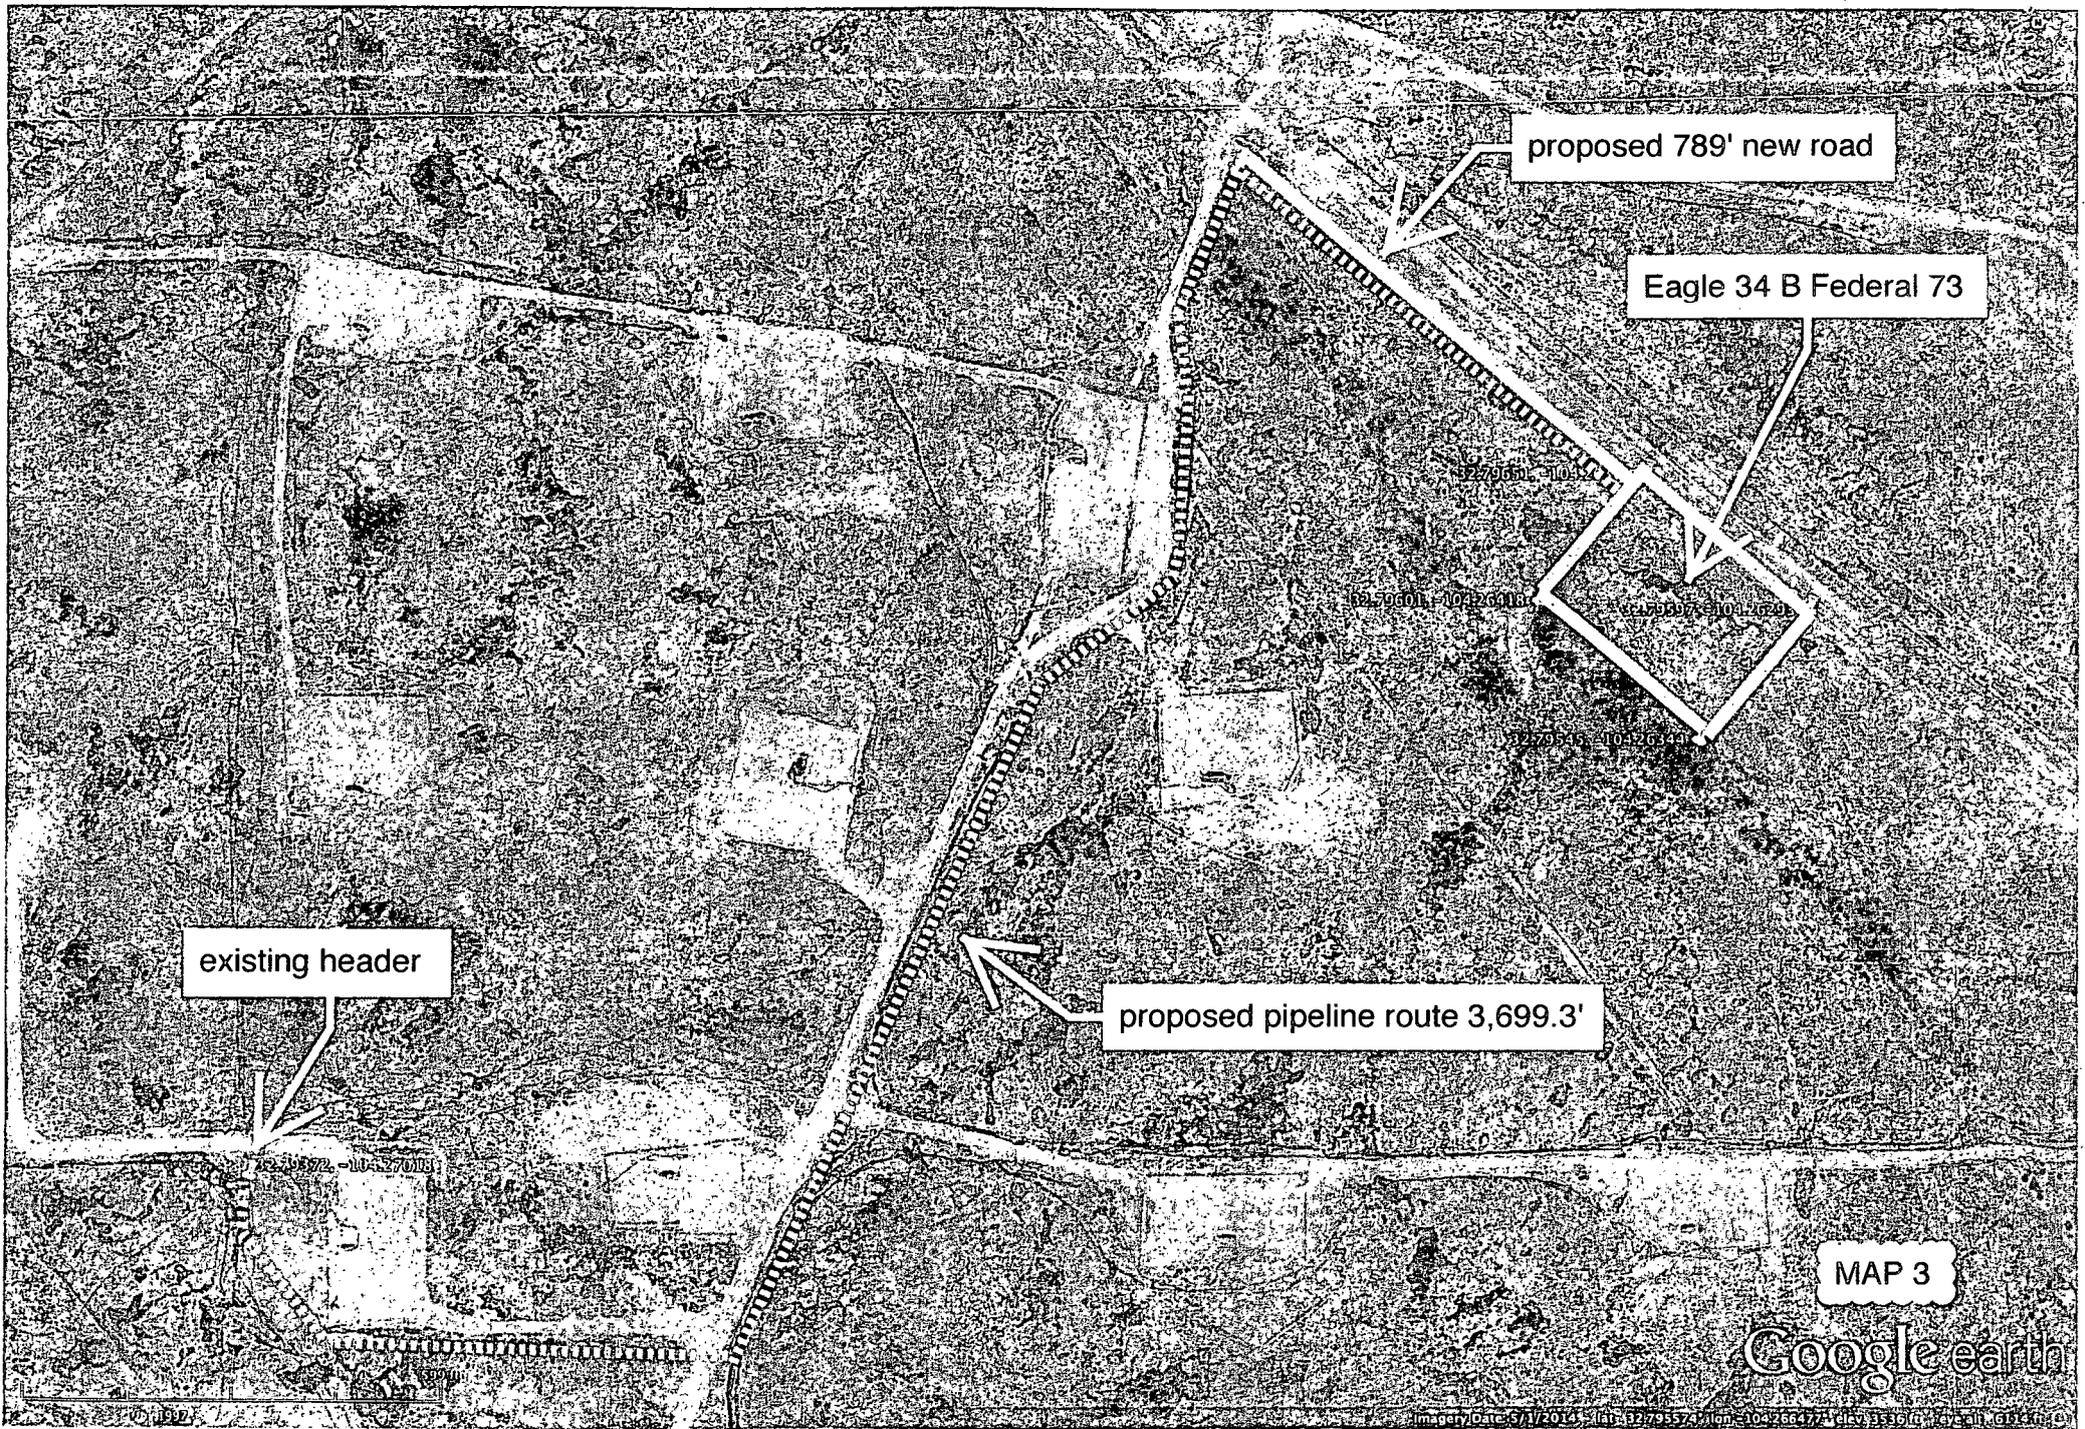

proposed 789' new road

Eagle 34 B Federal 73

existing header

proposed pipeline route 3,699.3'

MAP 3

Google earth


SECTION 34, TOWNSHIP 17 SOUTH, RANGE 27 EAST, N.M.P.M.
 EDDY COUNTY, STATE OF NEW MEXICO

SITE MAP

MAP 4

NOTE: THE LATITUDE AND LONGITUDE COORDINATES ARE SHOWN USING THE NORTH AMERICAN DATUM OF 1927 (NAD27), AND ARE IN DECIMAL DEGREE FORMAT.

PROPOSED 789 LF ACCESS ROAD TO 20' CALICHE ROAD

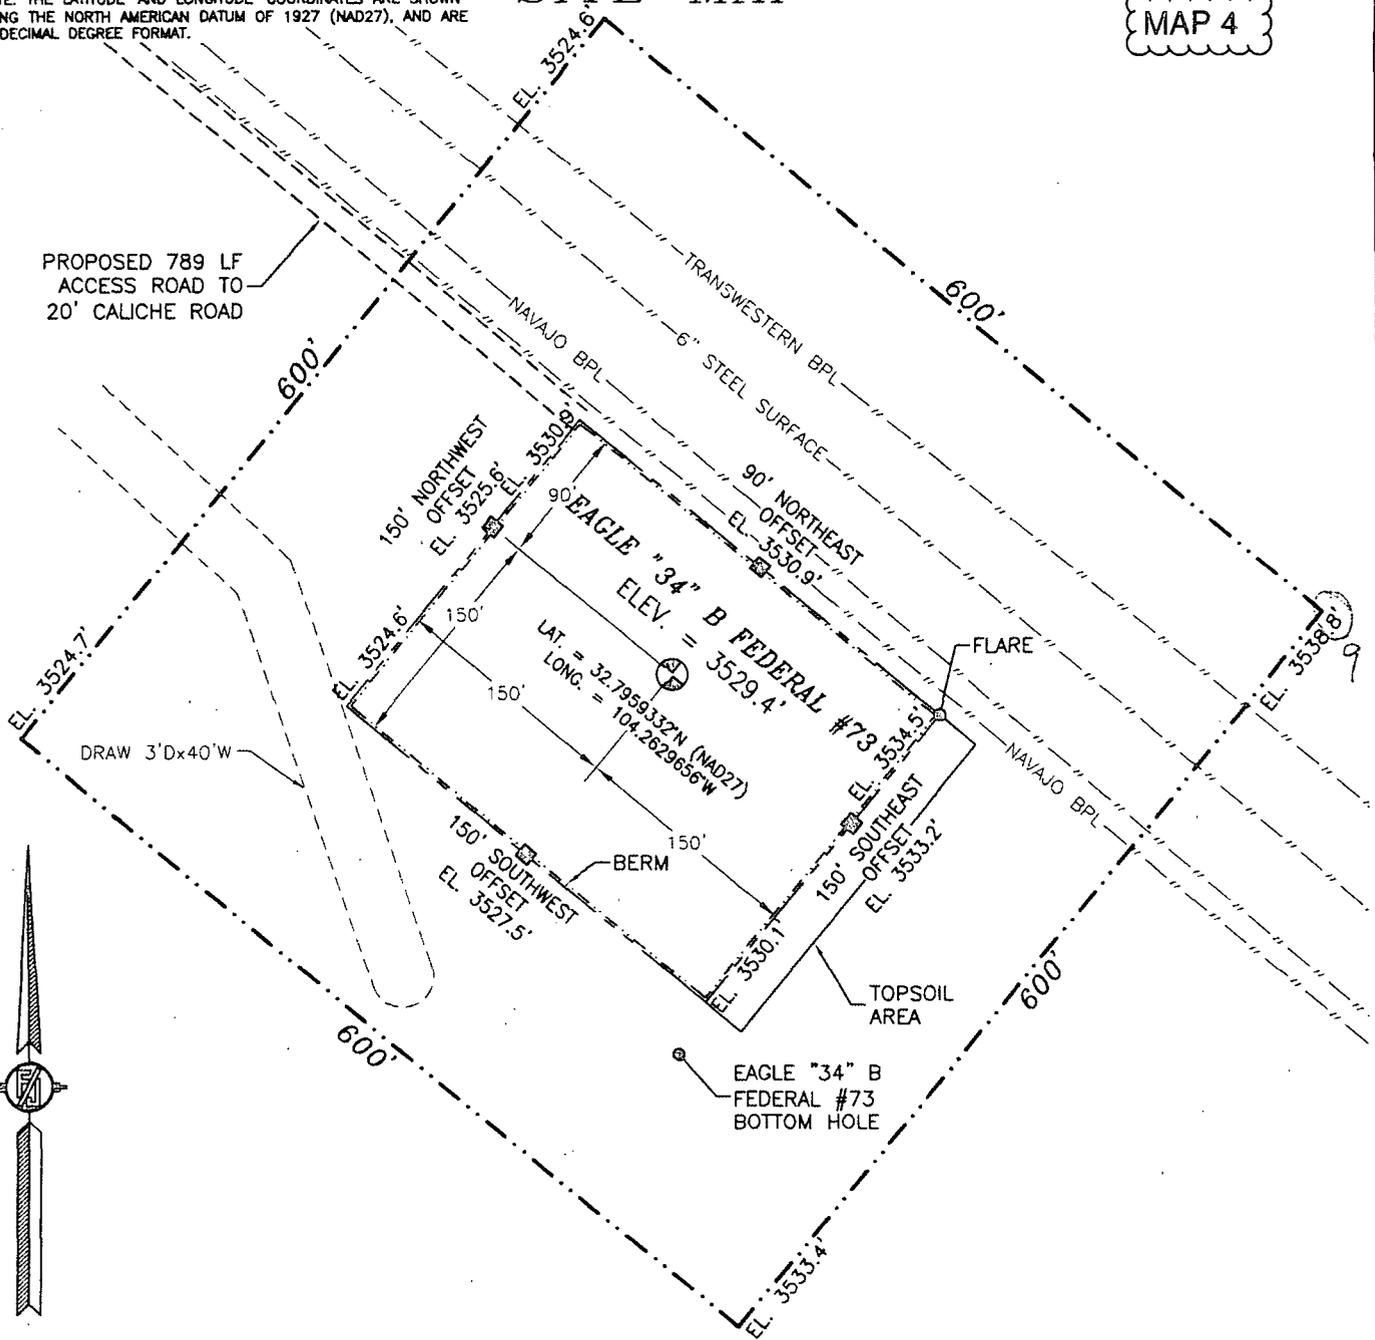

EAGLE "34" B FEDERAL #73
 ELEV. = 3529.4'
 LAT. = 32.7959332°N (NAD27)
 LONG. = 104.2629656°W

0 12 60 120 240

SCALE 1" = 120'

DIRECTIONS TO LOCATION
 FROM CR 225 (EMPIRE) AND CR 227 (LITTLE DIAMOND) GO SOUTHWEST ON CR 227 0.5 MILES, TURN RIGHT ON CALICHE ROAD AND GO NORTHWEST 0.75 MILES, BEND RIGHT AND GO NORTHEAST 750', BEND LEFT AND GO NORTH 0.31 MILES, BEND RIGHT AND GO NORTHEAST 0.38 MILES TO A PROPOSED ROAD SURVEY AND FOLLOW FLAGS SOUTHEAST 789' TO THE NORTHWEST CORNER OF PROPOSED PAD FOR THIS LOCATION.

LIME ROCK RESOURCES II-A, L.P.
EAGLE "34" B FEDERAL #73
 LOCATED 745 FT. FROM THE NORTH LINE
 AND 1650 FT. FROM THE EAST LINE OF
 SECTION 34, TOWNSHIP 17 SOUTH,
 RANGE 27 EAST, N.M.P.M.
 EDDY COUNTY, STATE OF NEW MEXICO

DECEMBER 9, 2013

SURVEY NO. 2285

MADRON SURVEYING, INC. 301 SOUTH CANAL (575) 234-3341 CARLSBAD, NEW MEXICO

Lime Rock Resources II-A, L.P.
 Eagle 34 B Federal 73
 SHL: 745' FNL & 1650' FEL
 BHL: 990' FNL & 1650' FEL
 Sec. 34, T. 17 S., R. 27 E., Eddy County, NM

DRILL PLAN PAGE 1

Drilling Program

1. ESTIMATED TOPS

<u>Name</u>	<u>TVD</u>	<u>MD</u>	<u>Content</u>
Tansill	0'	0'	---
Yates	75'	75'	fresh water
Seven Rivers*	327'	327'	oil, gas, saltwater
Queen	867'	868'	oil, gas, saltwater
Grayburg	1,278'	1,281'	oil, gas, saltwater
Premier	1,543'	1,547'	---
San Andres	1,582'	1,586'	oil, gas
Glorieta	2,932'	2,942'	oil, gas
Yeso	3,045'	3,055'	oil, gas
Tubb	4,412'	4,422'	oil, gas
Abo**	5,100'	5,110'	---
Total Depth	5,200'	5,210'	---

*in which surface casing will be set at 350' and contingency string, if needed, will be set at 375'

**Abo will not be perforated. Extra depth needed for logs and pump.

2. NOTABLE ZONES

Water bearing strata were found at 220' in the Harbold 11 (30-015-00606). That well is 1,342' east. Closest (5,530' north) water well (RA 01493) is an 876' deep well. No depth to water was reported.

3. PRESSURE CONTROL

A 2,000 psi BOP stack and manifold system will be used. A typical 2,000 system is attached behind the directional plan. If the equipment changes, then a

Eagle 34 B Federal 73

SHL: 745' FNL & 1650' FEL

BHL: 990' FNL & 1650' FEL

Sec. 34, T. 17 S., R. 27 E., Eddy County, NM

Sundry Notice will be filed. System will meet Onshore Orders 2 (BOP) and 6 (H₂S) requirements.

The blowout preventer equipment (BOP) will consist of a 2000 psi rated, "XLT" type, National VARCO double ram preventer that will be tested to a maximum pressure of 2000 psi. The unit will be hydraulically operated and the ram type preventer will be equipped with blind rams on top and drill pipe rams on bottom. The 2M BOP will be installed on the 8-5/8" surface casing and utilized continuously until total depth is reached. All casing strings will be tested as per Onshore Order #2. This also includes a thirty-day (30) test, should the rig still be operating on the same well in thirty days.

Pipe rams will be operated and checked each 24-hour period and each time the drill pipe is out of the hole. These functional tests will be documented on the daily drilling logs.

The BOP equipment will consist of the following:

- Double ram with blind rams (top) and pipe rams (bottom),
- Drilling spool, or blowout preventer with 2 side outlets (choke side and kill side shall be at least 2" diameter),
- Kill line (2" minimum),
- At least 2 choke line valves (2" minimum),
- 2" diameter choke line,
- 2 kill valves, one of which will be a check valve (2" minimum),
- 2 chokes, one of which will be capable of remote operation,
- Pressure gauge on choke manifold,
- Upper Kelly cock valve with handle available,
- Safety valve and subs to fit all drill string connections in use,
- All BOPE connections subjected to well pressure will be flanged, welded, or clamped,
- A fill-up line above the uppermost preventer.

Lime Rock Resources II-A, L.P.

DRILL PLAN PAGE 3

Eagle 34 B Federal 73

SHL: 745' FNL & 1650' FEL

BHL: 990' FNL & 1650' FEL

Sec. 34, T. 17 S., R. 27 E., Eddy County, NM

4. CASING & CEMENT

Type	Setting Depth	Hole	Casing	#/ft	Grade	Casing Thread	API	Age
Conductor	80'	26"	20"	91.5	B	Weld	No	New
Surface	350'	11"	8.625"	24	J-55	S T & C	Yes	New
Production	5210'	7.875"	5.5"	17	J-55	L T & C	Yes	New

All casing is designed with a minimum of:

Burst Safety Factor
1.18

Collapse Safety Factor
1.20

Tension Safety Factor
2.00

casing	depth set	sacks cement	top	gallons per sack	density (ppg)	yield (cu ft per sack)	total cubic feet	% excess	blend
conductor	80'	N/A	GL	ready mix	ready mix	ready mix	ready mix	ready mix	ready mix
surface	350'	300	GL	6.2	14.8	1.4	420	200	1
production lead	5210'	300	GL	9.8	12.8	1.9	570	80	2
production tail	5210'	710	GL	6.2	14.8	1.3	923	50	3

Surface casing blend (1) will be Class C + ¼ pound/sack cello flake + 2% CaCl₂. Centralizers will be installed as required by Onshore Order 2.

Production casing lead blend (2) will be 35:65 poz Class C + 5% NaCl + 1/4 pound/sack cello flake + 5 pounds per sack LCM-1 + 0.2% R-3 + 6% gel.

Production casing tail blend (3) will be Class C + 0.6% R-3 + ¼ pound/sack cello flake.

Lime Rock Resources II-A, L.P.

DRILL PLAN PAGE 4

Eagle 34 B Federal 73

SHL: 745' FNL & 1650' FEL

BHL: 990' FNL & 1650' FEL

Sec. 34, T. 17 S., R. 27 E., Eddy County, NM

Cement volumes will be adjusted based on caliper log volumes and depths of casing and adjusted proportionately for depth changes of the multi stage tool if applicable.

A 13-3/8", 48#, H-40, ST&C, New, API contingency string will be set at 375' in a reamed 17-1/2" hole if circulation is lost in cave or karst (cave & karst potential to 350') and not regained. Contingency string will be cemented to the surface with 400 sacks (536 cubic feet) Class C + 1/4 pound per sack cello flake + 2% CaCl₂ mixed with 6.2 gallons per sack to yield 1.34 cubic feet per sack and 14.8 pounds per gallon. Excess >100%

Upon the setting of a 13-3/8" contingency casing string, a 13-5/8" x 13-3/8" weld on wellhead will be installed. A 13-3/8" to 11" adapter flange will be installed and the 11" XLT 2000 psi NOV double ram BOP/BOPE (Schematic attached) will be installed. The BOP will be tested against the casing to 70% of the internal yield pressure of the 13-3/8", 48#, H-40, ST&C (1211 psi) casing and held for 30 minutes before drilling out the 13-3/8" casing shoe. The formation will be drilled with a 10-3/4" bit approximately 50 feet past the 13-3/8" casing shoe into a competent formation and 8-5/8" casing will be set at approximately 425' ($\geq 50'$ beyond the previous casing shoe) in the Seven Rivers and cemented with 410 sacks (549 cubic feet) Class C + 1/4 pound per sack cello flake + 2% CaCl₂ mixed with 6.2 gallons per sack to yield 1.34 cubic feet per sack and 14.8 pounds per gallon. Excess >125%

5. MUD PROGRAM

An electronic/mechanical mud monitor will with a minimum pit volume totalizer, stroke counter, and flow sensor will be used. All necessary mud products will be on site to handle any abnormal hole condition that could possibly be encountered during the drilling of this well. Circulation could be lost in the Grayburg and San Andres.

Lime Rock Resources II-A, L.P.

DRILL PLAN PAGE 5

Eagle 34 B Federal 73

SHL: 745' FNL & 1650' FEL

BHL: 990' FNL & 1650' FEL

Sec. 34, T. 17 S., R. 27 E., Eddy County, NM

Interval	0' - 375' (if contingency string run)	0' - 350'	350' - 5060'	5060' -TD
Type	fresh water	fresh water	brine	brine w/ gel & starch
weight	8.5 - 9.2	8.5 - 9.2	9.9 - 10.2	9.9 - 10.2
pH	10	10	10 - 11.5	10 - 11.5
WL	NC	NC	NC	15 - 20
viscosity	28 - 34	28 - 34	30 - 32	32 - 35
MC	NC	NC	NC	1
solids	NC	NC	<2%	<3%
pump rate	300 - 350 gpm	300 - 350 gpm	350 - 400 gpm	400 - 450 gpm
other	LCM as needed	LCM as needed	salt gel & MF as needed, pump high viscosity sweeps to control solids	salt gel, acid, & MF as needed; pump high viscosity sweeps to control solids

6. CORES, TESTS, & LOGS

No core or drill stem test is planned. A triple combo with spectral GR - dual lateral log, micro spherical focused log, & spectral density log will be run after tagging total depth. Will log from total depth to surface. A dual spaced neutron log and compensated spectral natural GR log will be run from total depth to surface.

7. DOWN HOLE CONDITIONS

No abnormal pressure or temperature is expected. Maximum expected bottom hole pressure is \approx 2,208 psi. No H₂S is expected during the drilling phase. Nevertheless, H₂S monitoring equipment will be on the rig floor and air packs will be available before drilling out of the surface casing. The mud logger will be warned to use a gas trap to detect H₂S. If any H₂S is detected, then the mud

Lime Rock Resources II-A, L.P.
Eagle 34 B Federal 73
SHL: 745' FNL & 1650' FEL
BHL: 990' FNL & 1650' FEL
Sec. 34, T. 17 S., R. 27 E., Eddy County, NM


DRILL PLAN PAGE 6

weight will be increased and H₂S inhibitors will be added to control the gas. An H₂S drilling operations contingency plan is attached.

The well is located in a potential cave or karst area. Thus, lost circulation is possible down to 350'. See the contingency casing string and cement plan on Page 4.

8. OTHER INFORMATION

The anticipated spud date is upon approval. It is expected it will take ≈1 month to drill and complete the well.

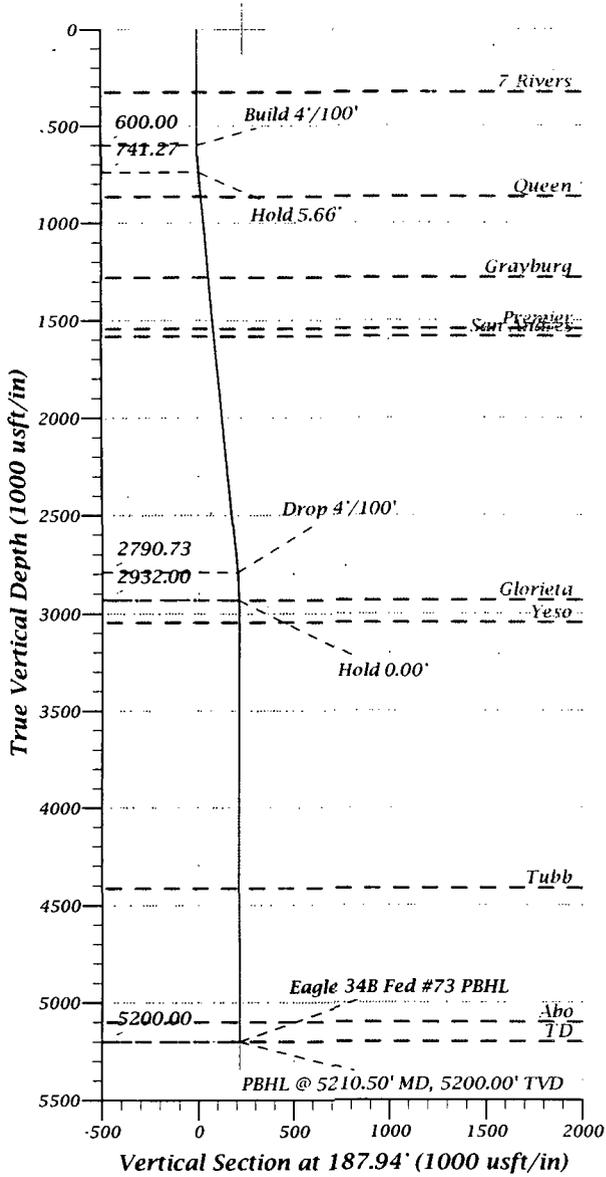

WELL DETAILS: Eagle 34 B Fed #73


Ground Level:	3529.40	GE @ 3529.40usft
<u>+N/-S</u>	<u>+E/-W</u>	
<u>Northing</u>	<u>Easting</u>	<u>Latitude</u>
0.00	0.00	653278.69 521623.182.79593320 -104.26296560

DESIGN TARGET DETAILS

<u>Name</u>	<u>TVD</u>	<u>+N/-S</u>	<u>+E/-W</u>	<u>Northing</u>	<u>Easting</u>
Target Box	0.00	-245.00	0.00	653033.69	521623.26
Eagle 34B Fed #73 PBHL	5200.00	-215.00	-30.00	653063.67	521593.24

PROJECT DETAILS: Eddy County NM (NAD 27)

Geodetic System: US State Plane 1927 (Exact solution)
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1866
Zone: New Mexico East 3001
System Datum: Mean Sea Level

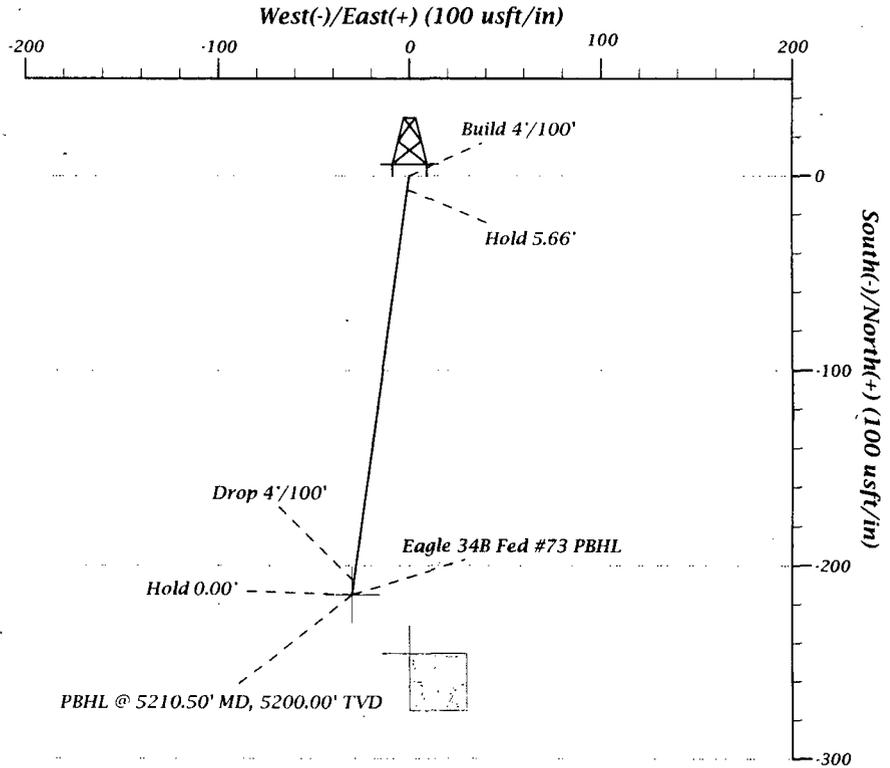

FORMATION TOP DETAILS

TVDPath	MDPath	Formation
327.00	327.00	7 Rivers
867.00	867.85	Queen
1278.00	1280.86	Grayburg
1543.00	1547.16	Premier
1582.00	1586.35	San Andres
2932.00	2942.50	Glorieta
3045.00	3055.50	Yeso
4412.00	4422.50	Tubb
5100.00	5110.50	Abo
5200.00	5210.50	TD

Azimuths to True North
Magnetic North: 7.56'

Magnetic Field
Strength: 48569.6snT
Dip Angle: 60.52'
Date: 08/04/2014
Model: IGRF2010

To convert a Magnetic Direction to a True Direction, Add 7.56' East
Magnetic North is 7.56' East of True North (Magnetic Declination)

Section Plans

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect	Annotation
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	Build 4'/100'
741.50	5.66	187.94	741.27	-6.92	-0.97	4.00	187.94	6.98	Hold 5.66'
2801.00	5.66	187.94	2790.73	-208.08	-29.03	0.00	0.00	210.10	Drop 4'/100'
2942.50	0.00	0.00	2932.00	-215.00	-30.00	4.00	180.00	217.08	Hold 0.00'
5210.50	0.00	0.00	5200.00	-215.00	-30.00	0.00	0.00	217.08	PBHL @ 5210.50' MD, 5200.00' TVD



Childress Directional Drilling

Planning Report



Database: EDM 5000.1 Single User Db
Company: Lime Rock Resources
Project: Eddy County NM (NAD 27)
Site: Sec 34-T17S-R27E
Well: Eagle 34 B Fed #73
Wellbore: Original Hole
Design: Plan #2(rev)

Local Co-ordinate Reference: Well Eagle 34 B Fed #73
TVD Reference: GE @ 3529.40usft
MD Reference: GE @ 3529.40usft
North Reference: True
Survey Calculation Method: Minimum Curvature

Project	Eddy County NM (NAD 27)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	Sec 34-T17S-R27E		
Site Position:	Northing:	650,955.55 usft	Latitude: 32.78954642
From: Map	Easting:	522,194.33 usft	Longitude: -104.26111182
Position Uncertainty:	0.00 usft	Slot Radius: 13.200 in	Grid Convergence: 0.04 °

Well	Eagle 34 B Fed #73		
Well Position	+N-S	2,323.53 usft	Northing: 653,278.70 usft
	+E-W	-569.64 usft	Easting: 521,623.10 usft
Position Uncertainty	0.00 usft	Wellhead Elevation:	0.00 usft
		Ground Level:	3,529.40 usft

Wellbore	Original Hole				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	08/04/14	7.56	60.52	48,570

Design	Plan #2(rev)			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N-S (usft)	+E-W (usft)	Direction (°)
	0.00	0.00	0.00	187.94

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N-S (usft)	+E-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00	
741.50	5.66	187.94	741.27	-6.92	-0.97	4.00	4.00	0.00	187.94	
2,801.00	5.66	187.94	2,790.73	-208.08	-29.03	0.00	0.00	0.00	0.00	
2,942.50	0.00	0.00	2,932.00	-215.00	-30.00	4.00	-4.00	0.00	180.00	
5,210.50	0.00	0.00	5,200.00	-215.00	-30.00	0.00	0.00	0.00	0.00	Eagle 34B Fed #73 P



Childress Directional Drilling

Planning Report



Database: EDM 5000.1 Single User Db
Company: Lime Rock Resources
Project: Eddy County NM (NAD 27)
Site: Sec 34-T17S-R27E
Well: Eagle 34 B Fed #73
Wellbore: Original Hole
Design: Plan #2(rev)

Local Co-ordinate Reference: Well Eagle 34 B Fed #73
TVD Reference: GE @ 3529.40usft
MD Reference: GE @ 3529.40usft
North Reference: True
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00	
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00	
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	
327.00	0.00	0.00	327.00	0.00	0.00	0.00	0.00	0.00	0.00	
7 Rivers										
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00	
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00	
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00	
Build 4°/100'										
700.00	4.00	187.94	699.92	-3.46	-0.48	3.49	4.00	4.00	0.00	
741.50	5.66	187.94	741.27	-6.92	-0.97	6.98	4.00	4.00	0.00	
Hold 5.66°										
800.00	5.66	187.94	799.48	-12.63	-1.76	12.75	0.00	0.00	0.00	
867.85	5.66	187.94	867.00	-19.26	-2.69	19.44	0.00	0.00	0.00	
Queen										
900.00	5.66	187.94	899.00	-22.40	-3.13	22.62	0.00	0.00	0.00	
1,000.00	5.66	187.94	998.51	-32.17	-4.49	32.48	0.00	0.00	0.00	
1,100.00	5.66	187.94	1,098.02	-41.93	-5.85	42.34	0.00	0.00	0.00	
1,200.00	5.66	187.94	1,197.53	-51.70	-7.21	52.20	0.00	0.00	0.00	
1,280.86	5.66	187.94	1,278.00	-59.60	-8.32	60.18	0.00	0.00	0.00	
Grayburg										
1,300.00	5.66	187.94	1,297.05	-61.47	-8.58	62.06	0.00	0.00	0.00	
1,400.00	5.66	187.94	1,396.56	-71.24	-9.94	71.93	0.00	0.00	0.00	
1,500.00	5.66	187.94	1,496.07	-81.00	-11.30	81.79	0.00	0.00	0.00	
1,547.16	5.66	187.94	1,543.00	-85.61	-11.95	86.44	0.00	0.00	0.00	
Premier										
1,586.35	5.66	187.94	1,582.00	-89.44	-12.48	90.31	0.00	0.00	0.00	
San Andres										
1,600.00	5.66	187.94	1,595.58	-90.77	-12.67	91.65	0.00	0.00	0.00	
1,700.00	5.66	187.94	1,695.10	-100.54	-14.03	101.51	0.00	0.00	0.00	
1,800.00	5.66	187.94	1,794.61	-110.31	-15.39	111.38	0.00	0.00	0.00	
1,900.00	5.66	187.94	1,894.12	-120.08	-16.75	121.24	0.00	0.00	0.00	
2,000.00	5.66	187.94	1,993.63	-129.84	-18.12	131.10	0.00	0.00	0.00	
2,100.00	5.66	187.94	2,093.15	-139.61	-19.48	140.96	0.00	0.00	0.00	
2,200.00	5.66	187.94	2,192.66	-149.38	-20.84	150.83	0.00	0.00	0.00	
2,300.00	5.66	187.94	2,292.17	-159.15	-22.21	160.69	0.00	0.00	0.00	
2,400.00	5.66	187.94	2,391.68	-168.91	-23.57	170.55	0.00	0.00	0.00	
2,500.00	5.66	187.94	2,491.20	-178.68	-24.93	180.41	0.00	0.00	0.00	
2,600.00	5.66	187.94	2,590.71	-188.45	-26.30	190.28	0.00	0.00	0.00	
2,700.00	5.66	187.94	2,690.22	-198.22	-27.66	200.14	0.00	0.00	0.00	
2,800.00	5.66	187.94	2,789.73	-207.99	-29.02	210.00	0.00	0.00	0.00	
2,801.00	5.66	187.94	2,790.73	-208.08	-29.03	210.10	0.00	0.00	0.00	
Drop 4°/100'										
2,900.00	1.70	187.94	2,889.51	-214.38	-29.91	216.45	4.00	-4.00	0.00	
2,942.50	0.00	0.00	2,932.00	-215.00	-30.00	217.08	4.00	-4.00	0.00	
Hold 0.00° - Glorieta										
3,000.00	0.00	0.00	2,989.50	-215.00	-30.00	217.08	0.00	0.00	0.00	
3,055.50	0.00	0.00	3,045.00	-215.00	-30.00	217.08	0.00	0.00	0.00	
Yeso										
3,100.00	0.00	0.00	3,089.50	-215.00	-30.00	217.08	0.00	0.00	0.00	
3,200.00	0.00	0.00	3,189.50	-215.00	-30.00	217.08	0.00	0.00	0.00	
3,300.00	0.00	0.00	3,289.50	-215.00	-30.00	217.08	0.00	0.00	0.00	



Childress Directional Drilling

Planning Report



Database: EDM 5000.1 Single User Db
Company: Lime Rock Resources
Project: Eddy County NM (NAD 27)
Site: Sec 34-T17S-R27E
Well: Eagle 34 B Fed #73
Wellbore: Original Hole
Design: Plan #2(rev)

Local Co-ordinate Reference: Well Eagle 34 B Fed #73
TVD Reference: GE @ 3529.40usft
MD Reference: GE @ 3529.40usft
North Reference: True
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
3,400.00	0.00	0.00	3,389.50	-215.00	-30.00	217.08	0.00	0.00	0.00
3,500.00	0.00	0.00	3,489.50	-215.00	-30.00	217.08	0.00	0.00	0.00
3,600.00	0.00	0.00	3,589.50	-215.00	-30.00	217.08	0.00	0.00	0.00
3,700.00	0.00	0.00	3,689.50	-215.00	-30.00	217.08	0.00	0.00	0.00
3,800.00	0.00	0.00	3,789.50	-215.00	-30.00	217.08	0.00	0.00	0.00
3,900.00	0.00	0.00	3,889.50	-215.00	-30.00	217.08	0.00	0.00	0.00
4,000.00	0.00	0.00	3,989.50	-215.00	-30.00	217.08	0.00	0.00	0.00
4,100.00	0.00	0.00	4,089.50	-215.00	-30.00	217.08	0.00	0.00	0.00
4,200.00	0.00	0.00	4,189.50	-215.00	-30.00	217.08	0.00	0.00	0.00
4,300.00	0.00	0.00	4,289.50	-215.00	-30.00	217.08	0.00	0.00	0.00
4,400.00	0.00	0.00	4,389.50	-215.00	-30.00	217.08	0.00	0.00	0.00
4,422.50	0.00	0.00	4,412.00	-215.00	-30.00	217.08	0.00	0.00	0.00
Tubb									
4,500.00	0.00	0.00	4,489.50	-215.00	-30.00	217.08	0.00	0.00	0.00
4,600.00	0.00	0.00	4,589.50	-215.00	-30.00	217.08	0.00	0.00	0.00
4,700.00	0.00	0.00	4,689.50	-215.00	-30.00	217.08	0.00	0.00	0.00
4,800.00	0.00	0.00	4,789.50	-215.00	-30.00	217.08	0.00	0.00	0.00
4,900.00	0.00	0.00	4,889.50	-215.00	-30.00	217.08	0.00	0.00	0.00
5,000.00	0.00	0.00	4,989.50	-215.00	-30.00	217.08	0.00	0.00	0.00
5,100.00	0.00	0.00	5,089.50	-215.00	-30.00	217.08	0.00	0.00	0.00
5,110.50	0.00	0.00	5,100.00	-215.00	-30.00	217.08	0.00	0.00	0.00
Abo									
5,200.00	0.00	0.00	5,189.50	-215.00	-30.00	217.08	0.00	0.00	0.00
5,210.50	0.00	0.00	5,200.00	-215.00	-30.00	217.08	0.00	0.00	0.00

PBHL @ 5210.50' MD, 5200.00' TVD - TD

Design Targets

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
Target Box	0.00	0.00	0.00	-245.00	0.00	653,033.70	521,623.26	32.79525976	-104.26296560
- hit/miss target - Shape - plan misses target center by 245.00usft at 0.00usft MD (0.00 TVD, 0.00 N, 0.00 E) - Rectangle (sides W30.00 H30.00 D0.00)									
Eagle 34B Fed #73 PBH	0.00	0.00	5,200.00	-215.00	-30.00	653,063.68	521,593.24	32.79534222	-104.26306323
- plan hits target center - Point									



Childress Directional Drilling
Planning Report



Database: EDM 5000.1 Single User Db
 Company: Lime Rock Resources
 Project: Eddy County NM (NAD 27)
 Site: Sec 34-T17S-R27E
 Well: Eagle 34 B Fed #73
 Wellbore: Original Hole
 Design: Plan #2(rev)


Local Co-ordinate Reference: Well Eagle 34 B Fed #73
 TVD Reference: GE @ 3529.40usft
 MD Reference: GE @ 3529.40usft
 North Reference: True
 Survey Calculation Method: Minimum Curvature

Formations

Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
327.00	327.00	7 Rivers			
867.85	867.00	Queen			
1,280.86	1,278.00	Grayburg			
1,547.16	1,543.00	Premier			
1,586.35	1,582.00	San Andres			
2,942.50	2,932.00	Glorieta			
3,055.50	3,045.00	Yeso			
4,422.50	4,412.00	Tubb			
5,110.50	5,100.00	Abo			
5,210.50	5,200.00	TD			

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
600.00	600.00	0.00	0.00	Build 4°/100'
741.50	741.27	-6.92	-0.97	Hold 5.66°
2,801.00	2,790.73	-208.08	-29.03	Drop 4°/100'
2,942.50	2,932.00	-215.00	-30.00	Hold 0.00°
5,210.50	5,200.00	-215.00	-30.00	PBHL @ 5210.50' MD, 5200.00' TVD

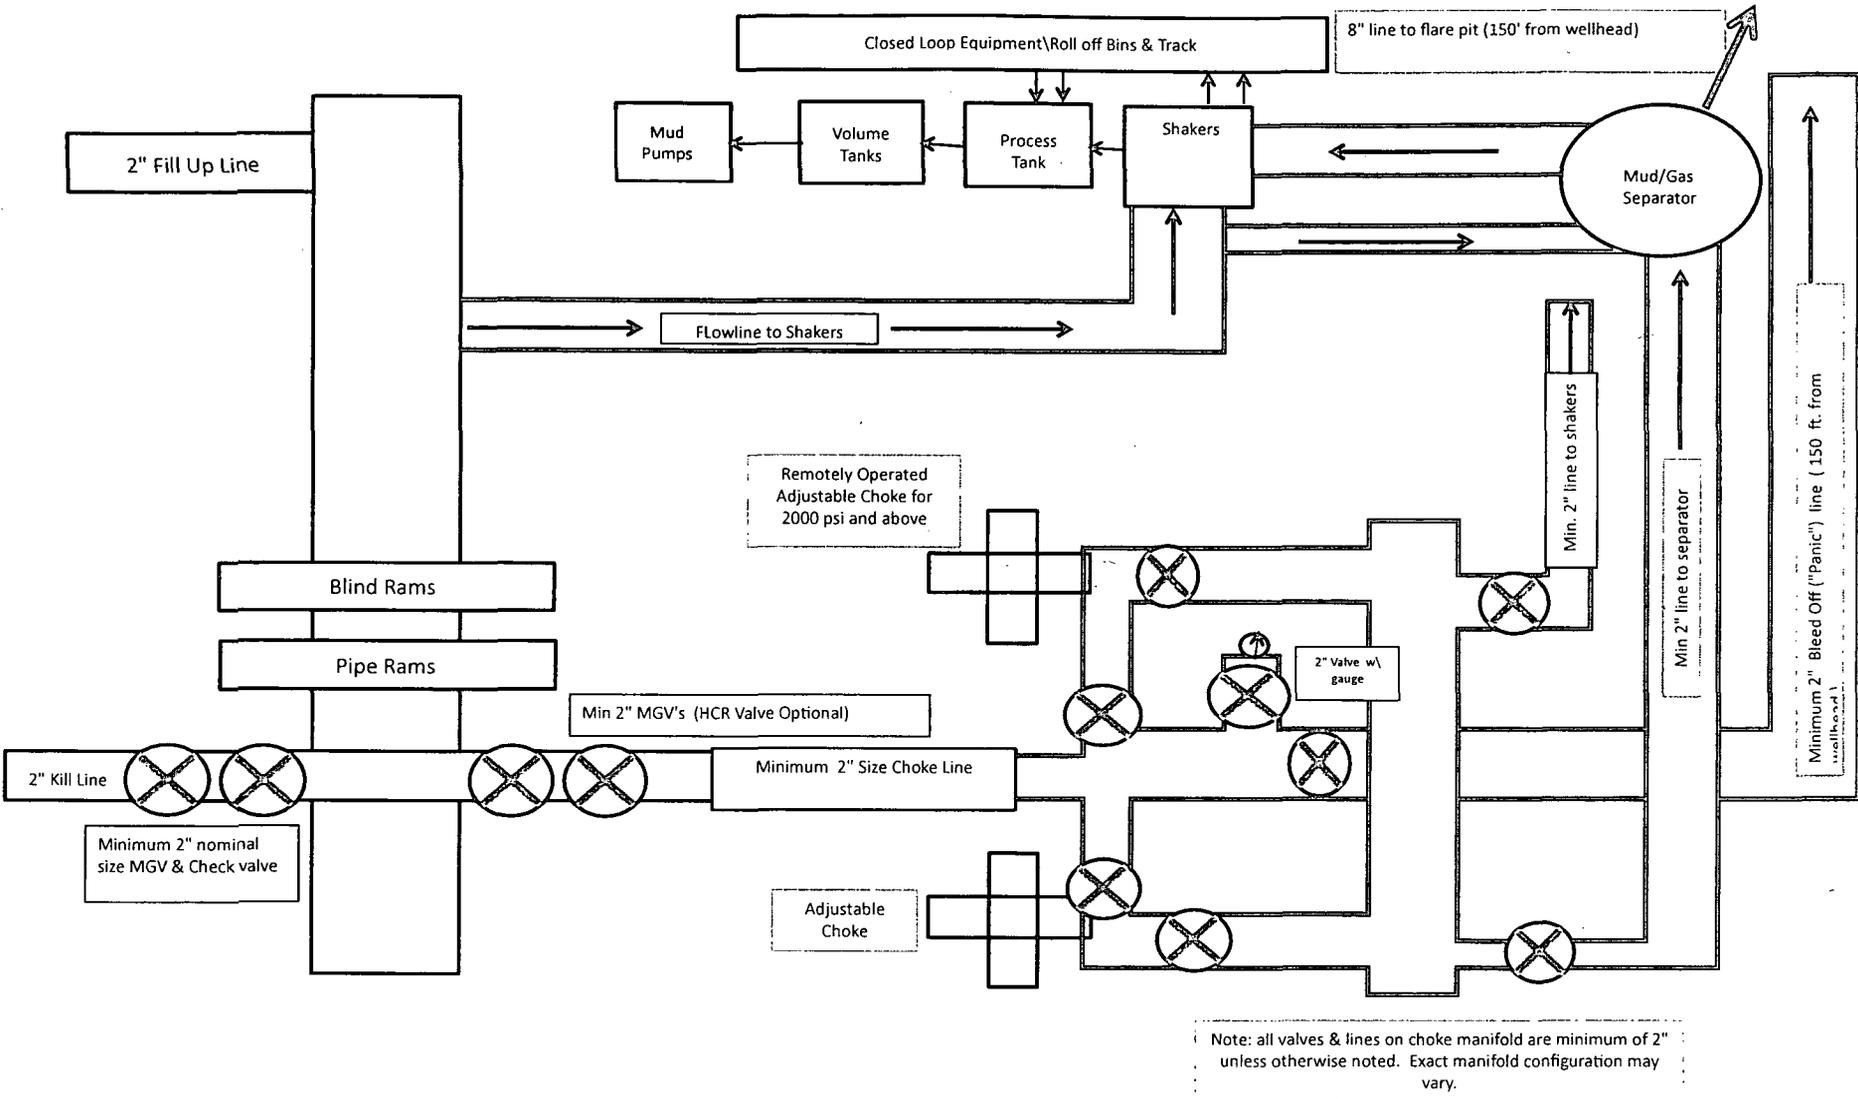

**11" Minimum 2000 psi BOP and
Minimum 2000 psi BOPE System Schematic
W/ Closed Loop System Equipment**

Lime Rock Resources II-A, L.P.

Eagle 34 B Federal 73

Section 34, T. 17 S., R. 27 E., Eddy County, NM

Design: Closed Loop System with roll-off steel bins (pits)

CRI/HOBBS will supply (2) bins (100 bbl) volume, rails and transportation relating to the Close Loop System. Specification of the Closed Loop System is attached.

Contacts: Gary Wallace (432) 638-4076 Cell (575) 393-1079 Office

Scomi Oil Tool: Supervisor – Armando Soto (432) 553-7979 Hobbs, NM

Monitoring 24 Hour service

Equipment: Centrifuges – Derrick Brand
Rig Shakers – Brandt Brand
D-watering Unit
Air pumps on location for immediate remediation process
Layout of Close Loop System with bins, centrifuges and shakers attached.

Cuttings and associated liquids will be hauled to a State regulated third party disposal site (CRI or Controlled Recovery, Inc.). The disposal site permit is DFP = #R9166.


2- (250 bbl) tanks to hold fluid
2-CRI bins with track system
1-500 bbl frac tanks with fresh water
1-500 bbl frac tanks for brine water

Operations:

Closed Loop System equipment will be inspected daily by each tour and any necessary maintenance performed. Any leak in system will be repaired and/or contained immediately. OCD will be notified within 48 hours of any spill. Remediation process will start immediately.

Closure:


During drilling operations all liquids, drilling fluids and cuttings will be hauled off via CRI equipment to Disposal Facility Permit NM-01-0006.

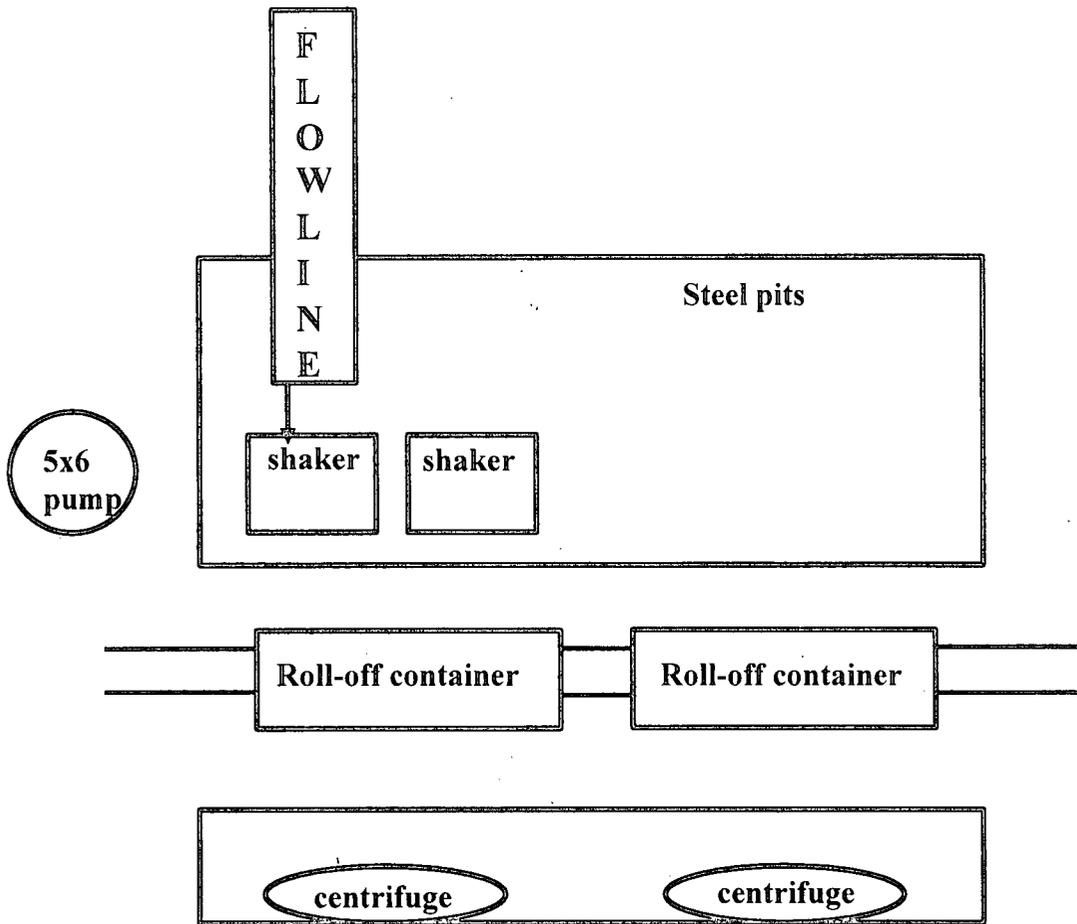


This will be maintained by 24 hour solids control personnel that stay on location.

Lime Rock's
Eagle 34 B Federal 73
rig diagram

1" = 50'



NORTH

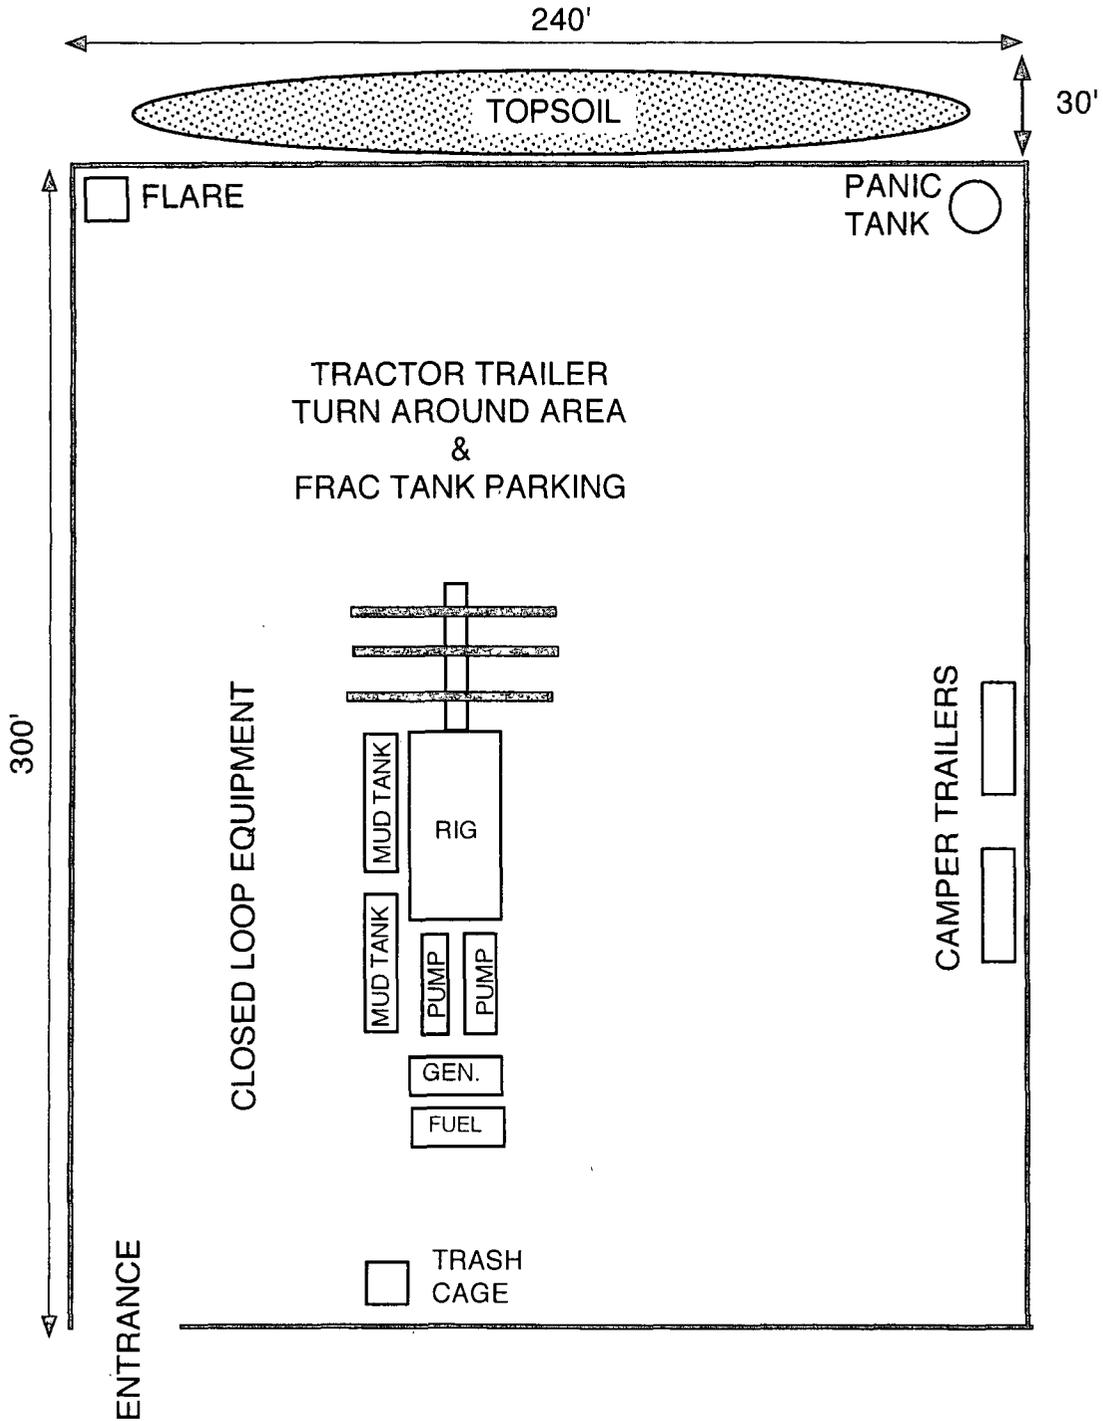

Hydrogen Sulfide Drilling Plan Summary

- A. All personnel will receive proper H₂S training in accordance with Onshore Order 6 III.C.3.a.
- B. Briefing Area: two perpendicular areas will be designated by signs and readily accessible.
- C. Required Emergency Equipment:

- Well control equipment
 - a. Flare line 150' from wellhead to be ignited by flare gun.
 - b. Choke manifold with a remotely operated choke.
 - c. Mud/gas separator
- Protective equipment for essential personnel.

Breathing apparatus:

- a. Rescue Packs (SCBA) — 1 unit will be placed at each breathing area, 2 will be stored in the safety trailer.
- b. Work/Escapes packs — 4 packs will be stored on the rig floor and contain sufficiently long air hoses as to not to restrict work activity.
- c. Emergency Escape Packs — 4 packs will be stored in the doghouse for emergency evacuation.

Auxiliary Rescue Equipment:

- a. Stretcher
- b. Two OSHA full body harness
- c. 100 ft 5/8 inch OSHA approved rope
- d. 1-20# class ABC fire extinguisher

- H₂S detection and monitoring equipment:

The stationary detector with three sensors will be placed in the upper dog house if equipped, set to visually alarm @ 10 ppm and audible @ 14 ppm. Calibrate a minimum of every 30 days or as needed. The sensors will be placed in the following places: Rig floor / Bell nipple / End of flow line or where well bore fluid is being discharged.
(Gas sample tubes will be stored in the safety trailer)

- Visual warning systems.
 - a. One color code condition sign will be placed at the entrance to the site reflecting the possible conditions at the site.
 - b. A colored condition flag will be on display, reflecting the current condition at the site at the time.
 - c. Two wind socks will be placed in strategic locations, visible from all angles.
- Mud program:

The mud program has been designed to minimize the volume of H₂S circulated to surface. The operator will have the necessary mud products to minimize hazards while drilling in H₂S bearing zones.

Agency Call List		
City	Agency or Office	Telephone Number
Artesia	Ambulance	911
Artesia	State Police	575-746-2703
Artesia	Sheriff's Office	575-746-9888
Artesia	City Police	575-746-2703
Artesia	Fire Department	575-746-2701
Artesia	Local Emergency Planning Committee	575-746-2122
Artesia	New Mexico OCD District II	575-748-1283
Carlsbad	Ambulance	911
Carlsbad	State Police	575-885-3137
Carlsbad	Sheriff's Office	575-887-7551
Carlsbad	City Police	575-885-2111
Carlsbad	Fire Department	575-885-2111
Carlsbad	Local Emergency Planning Committee	575-887-3798
Carlsbad	US DOI Bureau of Land Management	575-887-6544
State Wide	New Mexico Emergency Response Commission ("NMERC")	505-476-9600
State Wide	NMERC 24 hour Number	505-827-9126
State Wide	New Mexico State Emergency Operations Center	505-476-9635
National	National Emergency Response Center (Washington, D.C.)	800-424-8802

H2S CONTINGENCY DRILLING PLAN EMERGENCY CONTACTS


Emergency Services				
Name	Service	Location	Telephone Number	Alternate Number
Boots & Coots International Well Control	Well Control	Houston / Odessa	1-800-256-9688	281-931-8884
Cudd Pressure Control	Well Control & Pumping	Odessa	915-699-0139	915-563-3356
Baker Hughes Inc.	Pumping Service	Artesia, Hobbs and Odessa	575-746-2757	SAME
Total Safety	Safety Equipment and Personnel	Artesia	575-746-2847	SAME
Cutter Oilfield Services	Drilling Systems Equipment	Midland	432-488-6707	SAME
Assurance Fire & Safety	Safety Equipment and Personnel	Artesia	575-396-9702	575-441-2224
Flight for Life	Emergency Helicopter Evacuation	Lubbock	806-743-9911	SAME
Aerocare	Emergency Helicopter Evacuation	Lubbock	806-747-8923	SAME
Med Flight Air Ambulance	Emergency Helicopter Evacuation	Albuquerque	505-842-4433	SAME
Artesia General Hospital	Emergency Medical Care	Artesia	575-748-3333	702 North 13 Street

SECTION 34, TOWNSHIP 17 SOUTH, RANGE 27 EAST, N.M.P.M.
 EDDY COUNTY, STATE OF NEW MEXICO

SITE MAP

NOTE: THE LATITUDE AND LONGITUDE COORDINATES ARE SHOWN USING THE NORTH AMERICAN DATUM OF 1927 (NAD27), AND ARE IN DECIMAL DEGREE FORMAT.

H2S PAGE 5

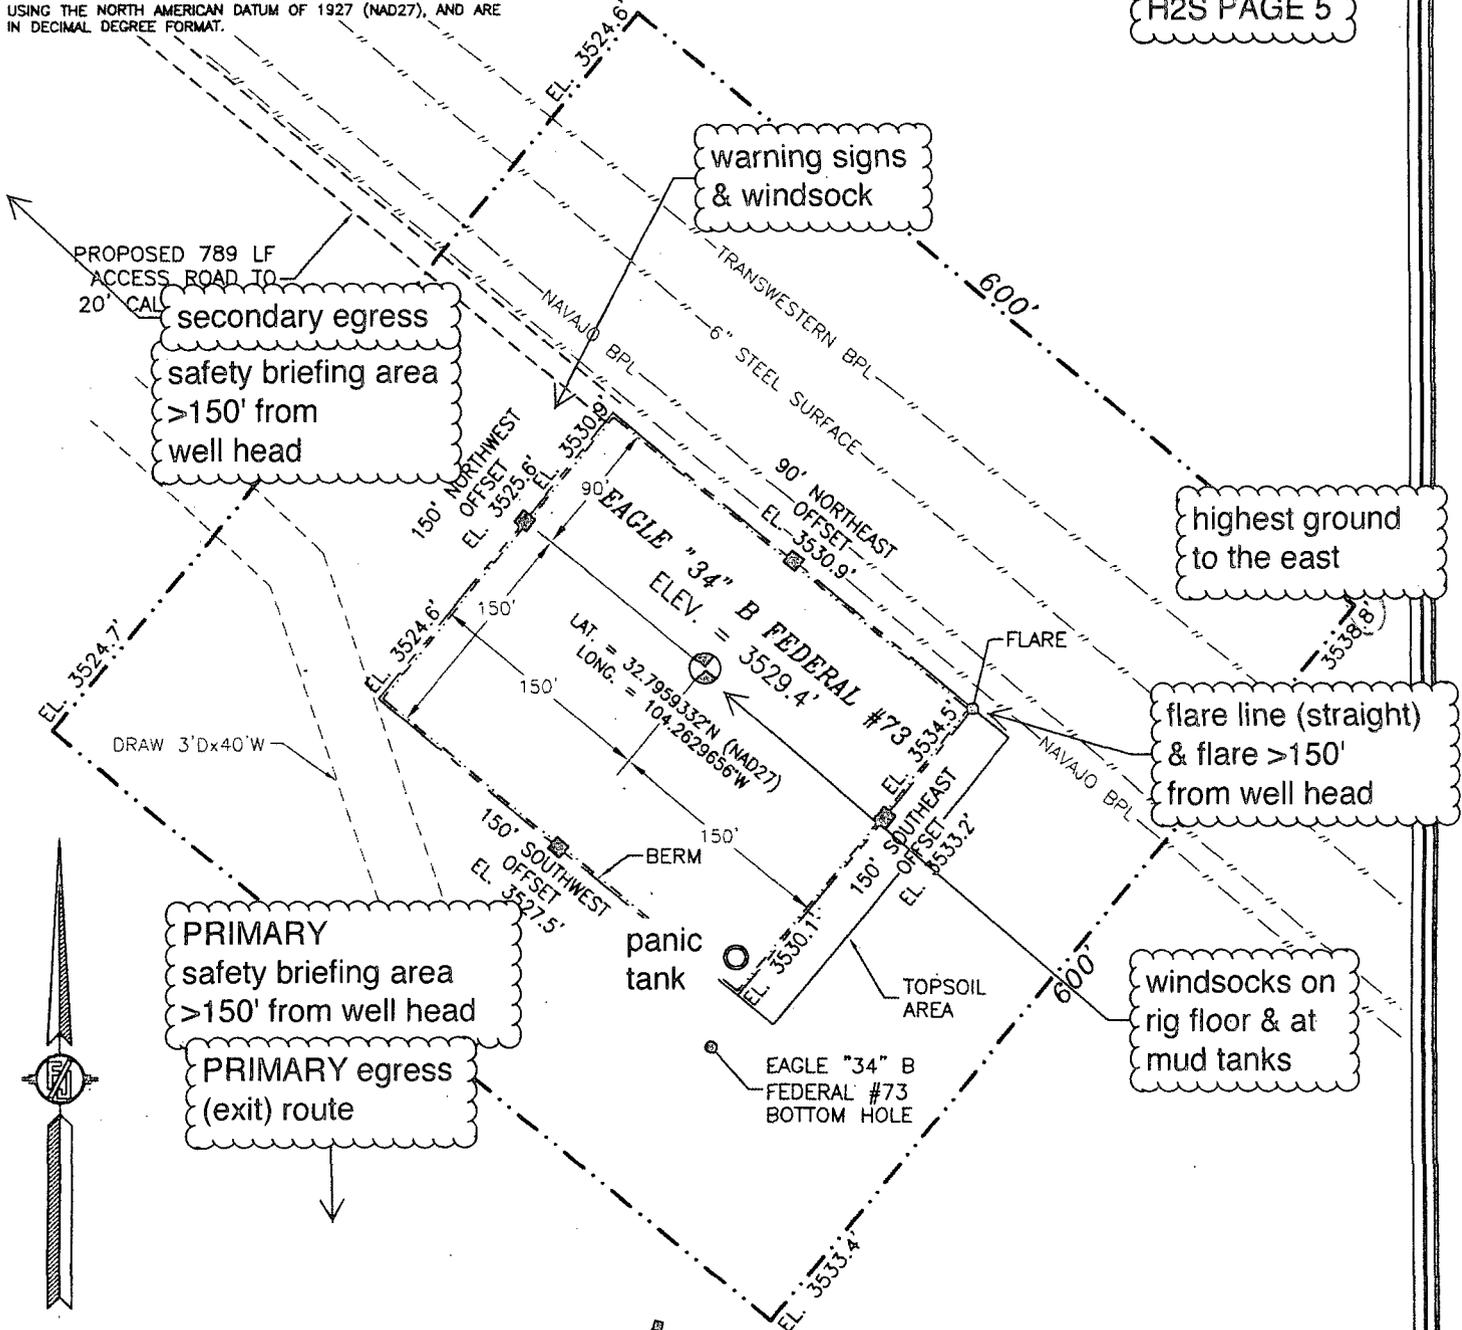

LIME ROCK RESOURCES II-A, L.P.
EAGLE "34" B FEDERAL #73
 LOCATED 745 FT. FROM THE NORTH LINE
 AND 1650 FT. FROM THE EAST LINE OF
 SECTION 34, TOWNSHIP 17 SOUTH,
 RANGE 27 EAST, N.M.P.M.
 EDDY COUNTY, STATE OF NEW MEXICO


DECEMBER 9, 2013

SURVEY NO. 2285



**Eagle 34B Federal #73
H₂S Contingency Plan:
1 Mile Radius Map**



Section 34, Township 17S, Range 27E
Eddy County, New Mexico



NAD 1927 New Mexico State Plane East
FIPS 3001 Feet



Prepared by Permits West, Inc., October 6, 2014
for Lime Rock Resources II-A, L.P.

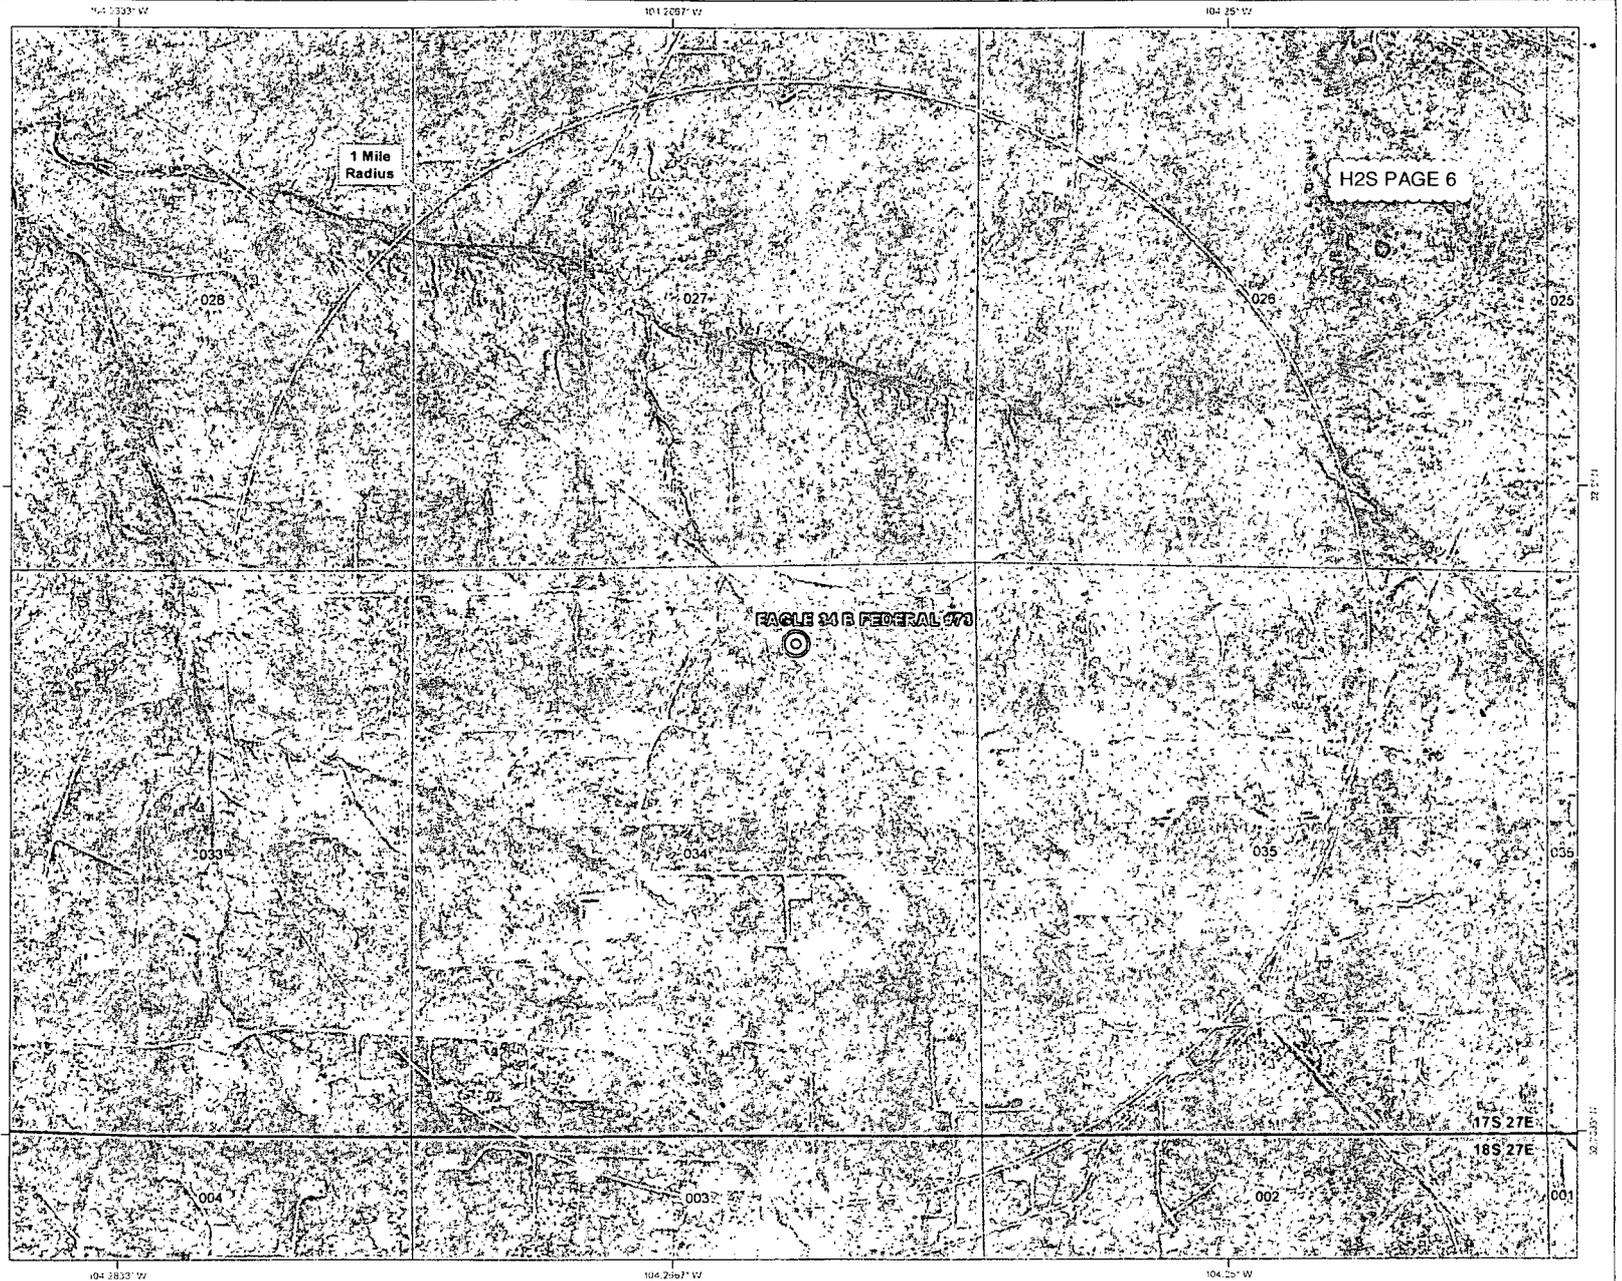




**Eagle 34B Federal #73
H₂S Contingency Plan:
2 Mile Radius Map**

Section 34, Township 17S, Range 27E
Eddy County, New Mexico



© EAGLE 34 B FEDERAL #73



NAD 1927 New Mexico State Plane East
FIPS 3001 Feet



Prepared by Permits West, Inc., October 6, 2014
for Lime Rock Resources II-A, L.P.

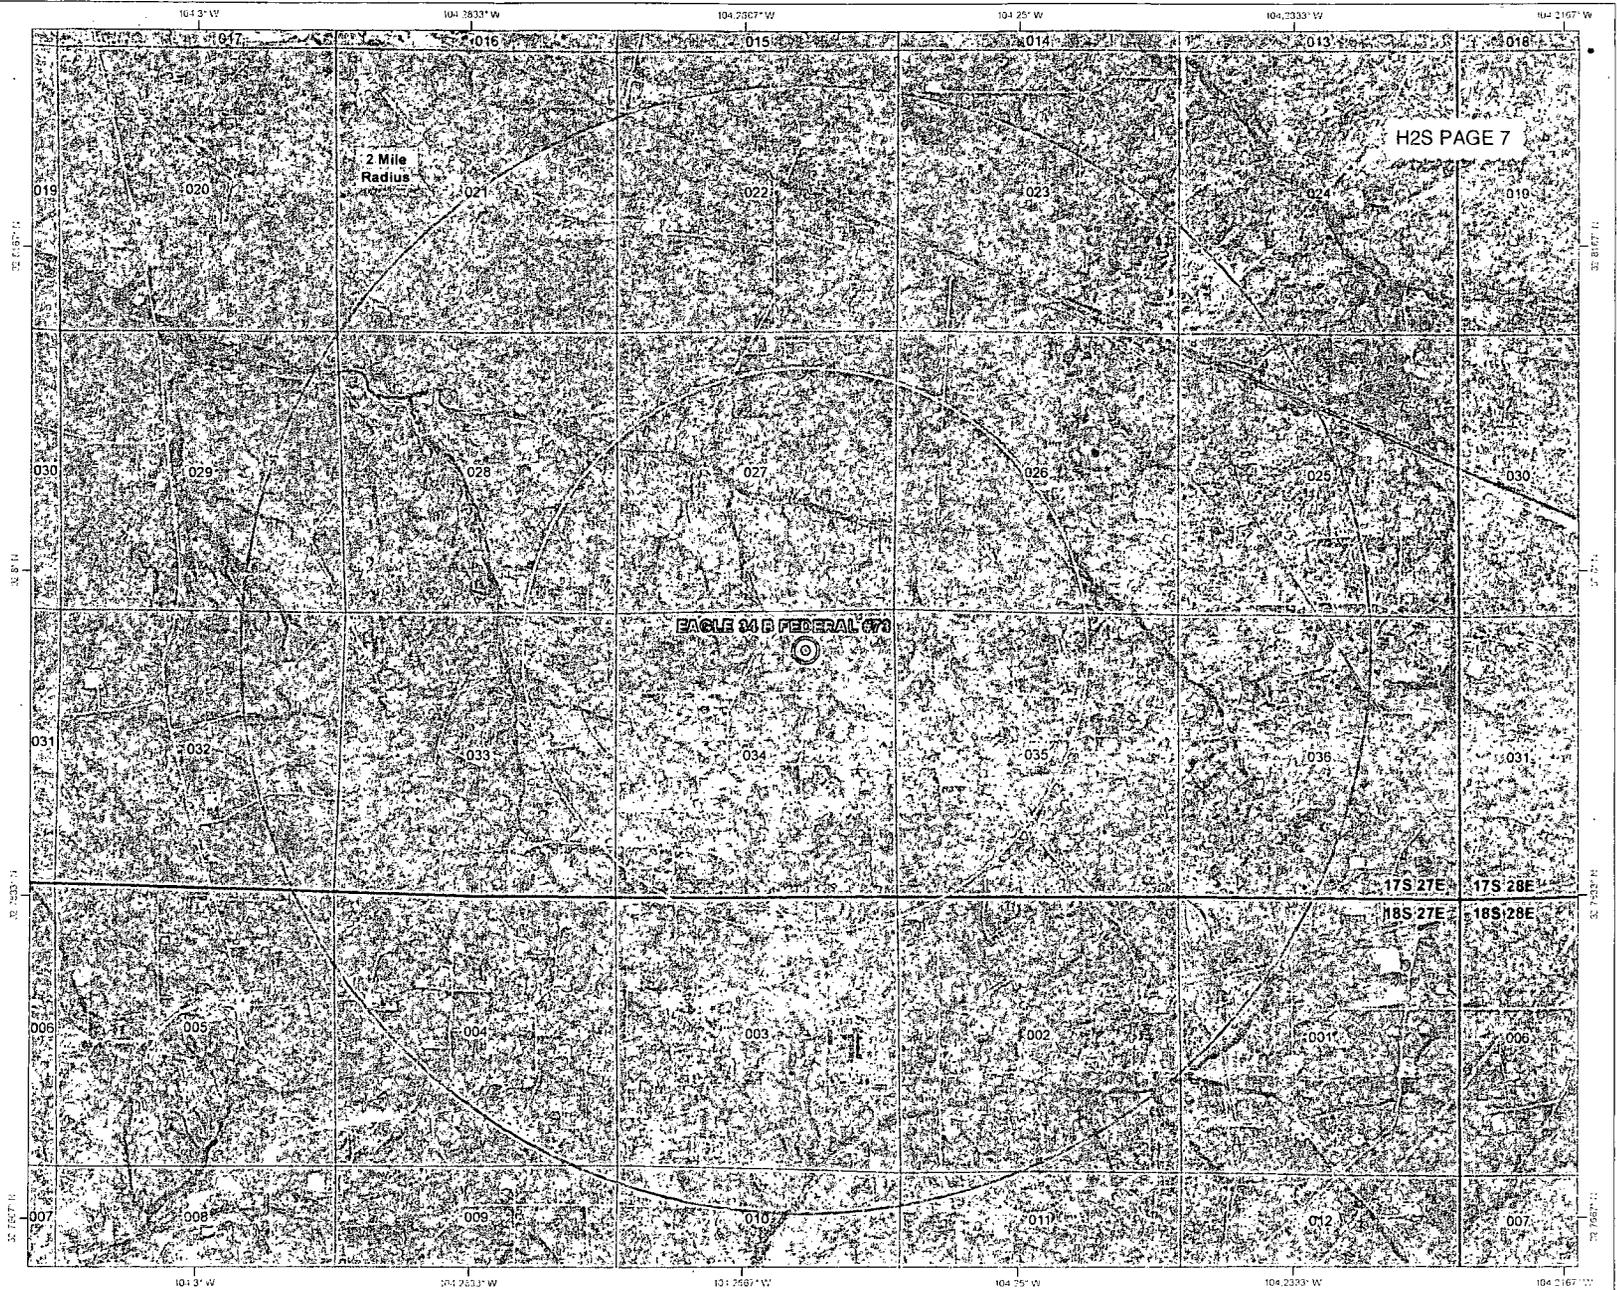


SECTION 34, TOWNSHIP 17 SOUTH, RANGE 27 EAST, N.M.P.M.
 EDDY COUNTY, STATE OF NEW MEXICO

SITE MAP

NOTE: THE LATITUDE AND LONGITUDE COORDINATES ARE SHOWN USING THE NORTH AMERICAN DATUM OF 1927 (NAD27), AND ARE IN DECIMAL DEGREE FORMAT.

INTERIM RECLAMATION DIAGRAM

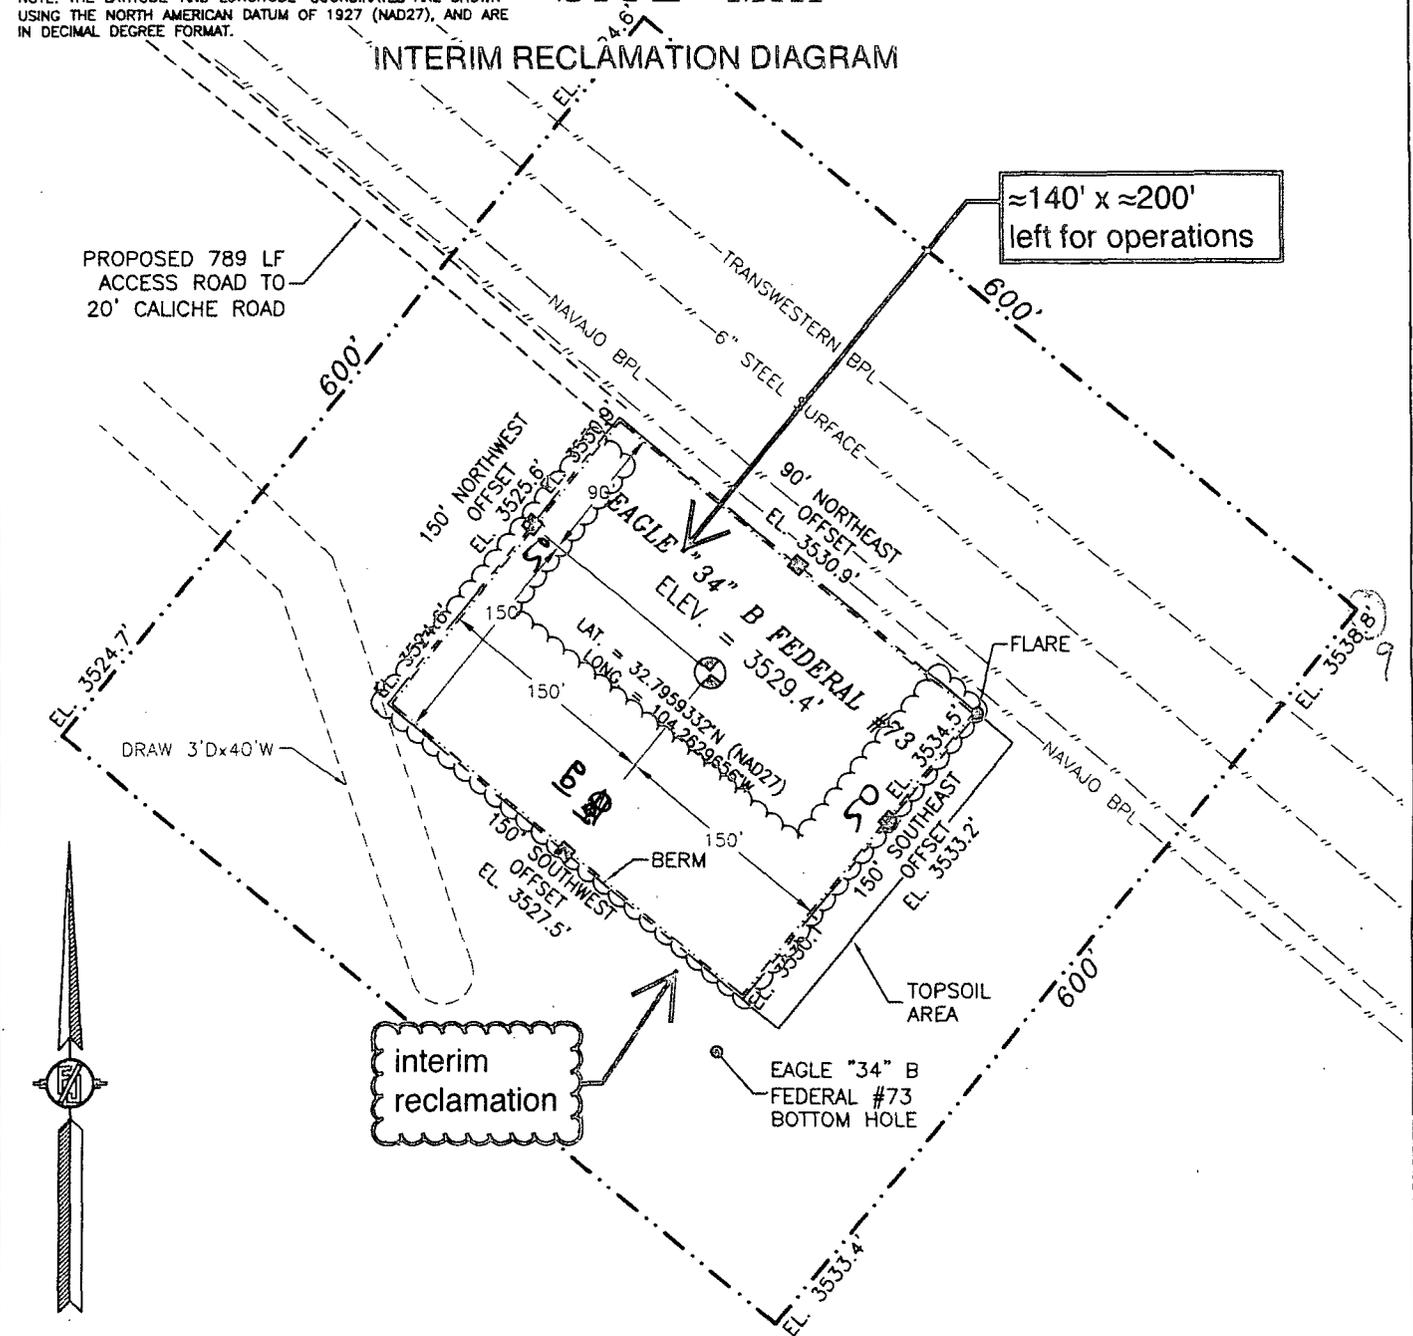

0 12 60 120 240

SCALE 1" = 120'
 DIRECTIONS TO LOCATION

FROM CR 225 (EMPIRE) AND CR 227 (LITTLE DIAMOND) GO
 SOUTHWEST ON CR 227 0.5 MILES, TURN RIGHT ON CALICHE ROAD
 AND GO NORTHWEST 0.75 MILES, BEND RIGHT AND GO NORTHEAST
 750', BEND LEFT AND GO NORTH 0.31 MILES, BEND RIGHT AND GO
 NORTHEAST 0.38 MILES TO A PROPOSED ROAD SURVEY AND FOLLOW
 FLAGS SOUTHEAST 789' TO THE NORTHWEST CORNER OF PROPOSED
 PAD FOR THIS LOCATION.

LIME ROCK RESOURCES II-A, L.P.
EAGLE "34" B FEDERAL #73
 LOCATED 745 FT. FROM THE NORTH LINE
 AND 1650 FT. FROM THE EAST LINE OF
 SECTION 34, TOWNSHIP 17 SOUTH,
 RANGE 27 EAST, N.M.P.M.
 EDDY COUNTY, STATE OF NEW MEXICO

DECEMBER 9, 2013

SURVEY NO. 2285

MADRON SURVEYING, INC.

301 SOUTH CANAL
 (575) 234-3341

CARLSBAD, NEW MEXICO

Lime Rock Resources II-A, L.P.
Eagle 34 B Federal 73
SHL: 745' FNL & 1650' FEL
BHL: 990' FNL & 1650' FEL
Sec. 34, T. 17 S., R. 27 E., Eddy County, NM

SURFACE PLAN PAGE 1

Surface Use Plan

1. ROAD DIRECTIONS & DESCRIPTIONS (See MAPS 1 - 4)

From the center of Artesia...

Go East 9.3 miles on US 82 to the equivalent of Mile Post 116.8

Then turn right and go South 1/4 mile on paved County Road 204

Then turn right and go Southwest 2.1 miles on paved County Road 225

Then bear right and go Southwest 1/2 mile on County Road 227

Then turn right and go North 0.1 mile on a caliche road

Then bear left and go Northwest 2/3 mile on a caliche road

Then bear right and go Northeast 0.15 mile around a battery on a caliche road

Then turn left and go North and Northeast 0.7 mile on a caliche road

Then turn right and go Southeast 789' cross country along pipelines to the pad

Roads will be maintained to a standard at least equal to or better than their present condition. Access to the lease will be via NMNM-096616.

2. ROAD TO BE BUILT OR UPGRADED (See MAPS 2 - 4)

The 789' of new road will be crowned, have a 14' wide driving surface, and be surfaced with caliche. Borrow ditches will turn out at least 3 times. Maximum disturbed width = 20'. Maximum grade = 5%. Maximum cut or fill = 2'. No culvert, cattle guard, or vehicle turn out is needed. Existing road upgrading will consist of fixing potholes with caliche.

3. EXISTING WELLS (See MAP 2)

Existing oil, gas, and P & A wells are within a mile. There are no disposal, injection, or water wells within a mile radius.

Lime Rock Resources II-A, L.P.
Eagle 34 B Federal 73
SHL: 745' FNL & 1650' FEL
BHL: 990' FNL & 1650' FEL
Sec. 34, T. 17 S., R. 27 E., Eddy County, NM

SURFACE PLAN PAGE 2

4. PROPOSED PRODUCTION FACILITIES (See MAPS 5 - 6)

The only production equipment on the pad will be the pump jack. Two 3" O. D. poly surface pipelines (one gas and one production) will be laid 3,699.3' northwest and then southwest along existing roads to Lime Rock's existing Eagle 33/34 header in SENW Section 34. Pipelines will operate at \approx 50 psi.

5. WATER SUPPLY (See MAPS 1 - 4)

Water will be trucked from private land in SWSW and SWSE 11-17s-26e.

6. CONSTRUCTION MATERIALS & METHODS

NM One Call (1-800-321-ALERT) will be notified before construction starts. Topsoil and brush will be stockpiled southeast of the pad. V door will be to the southeast. A closed loop drilling system will be used. Caliche will be bought and hauled from an existing approved caliche pit. Dirt contractor will be responsible for caliche.

7. WASTE DISPOSAL

All trash will be placed in a portable trash cage. It will be hauled to a county landfill. There will be no trash burning. Contents (drill cuttings, mud, salts, and other chemicals) of the mud tanks will be hauled to state approved disposal sites. Human waste will be disposed of in chemical toilets and hauled to an approved dump station.

Lime Rock Resources II-A, L.P.
Eagle 34 B Federal 73
SHL: 745' FNL & 1650' FEL
BHL: 990' FNL & 1650' FEL
Sec. 34, T. 17 S., R. 27 E., Eddy County, NM

SURFACE PLAN PAGE 3

8. ANCILLARY FACILITIES

There will be no airstrip or camp. Camper trailers will be on location for the company man, tool pusher, or mud logger.

9. WELL SITE LAYOUT

See rig layout for depictions of the well pad, trash cage, access onto the location, parking, living facilities, and rig orientation.

10. RECLAMATION

Interim reclamation will consist of removing caliche and shrinking the pad to a $\approx 140'$ x $\approx 200'$ area centered on the pump jack. Disturbed areas will be contoured to a natural shape and no steeper than 3:1. Soil and brush will be evenly spread over disturbed areas. Seeded areas will be ripped or harrowed. A BLM approved seed mix will be sown in a BLM approved manner. Enough stockpiled topsoil will be retained to cover the remainder of the pad when the well is plugged. Once the well is plugged, then the remainder of the pad will be similarly reclaimed. Noxious weeds will be controlled.

11. SURFACE OWNER

All construction will be on BLM.

12. OTHER INFORMATION


On site inspection was held with Amanda Lynch (BLM) on November 6, 2013.

Boone Arch filed report NMCRIS 129391 on December 31, 2013.

2-3" SDR 7 POLY SURFACE LINES (1-GAS & 1-PRODUCTION) FROM THE
EAGLE "34" B FEDERAL #73 WELL TO AN EAGLE 33/34 FEDERAL BATTERY
FIELD HEADER

MAP 5


LIME ROCK RESOURCES II-A, L.P.
CENTERLINE SURVEY OF A PIPELINE CROSSING
SECTION 34, TOWNSHIP 17 SOUTH, RANGE 27 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO
DECEMBER 9, 2013

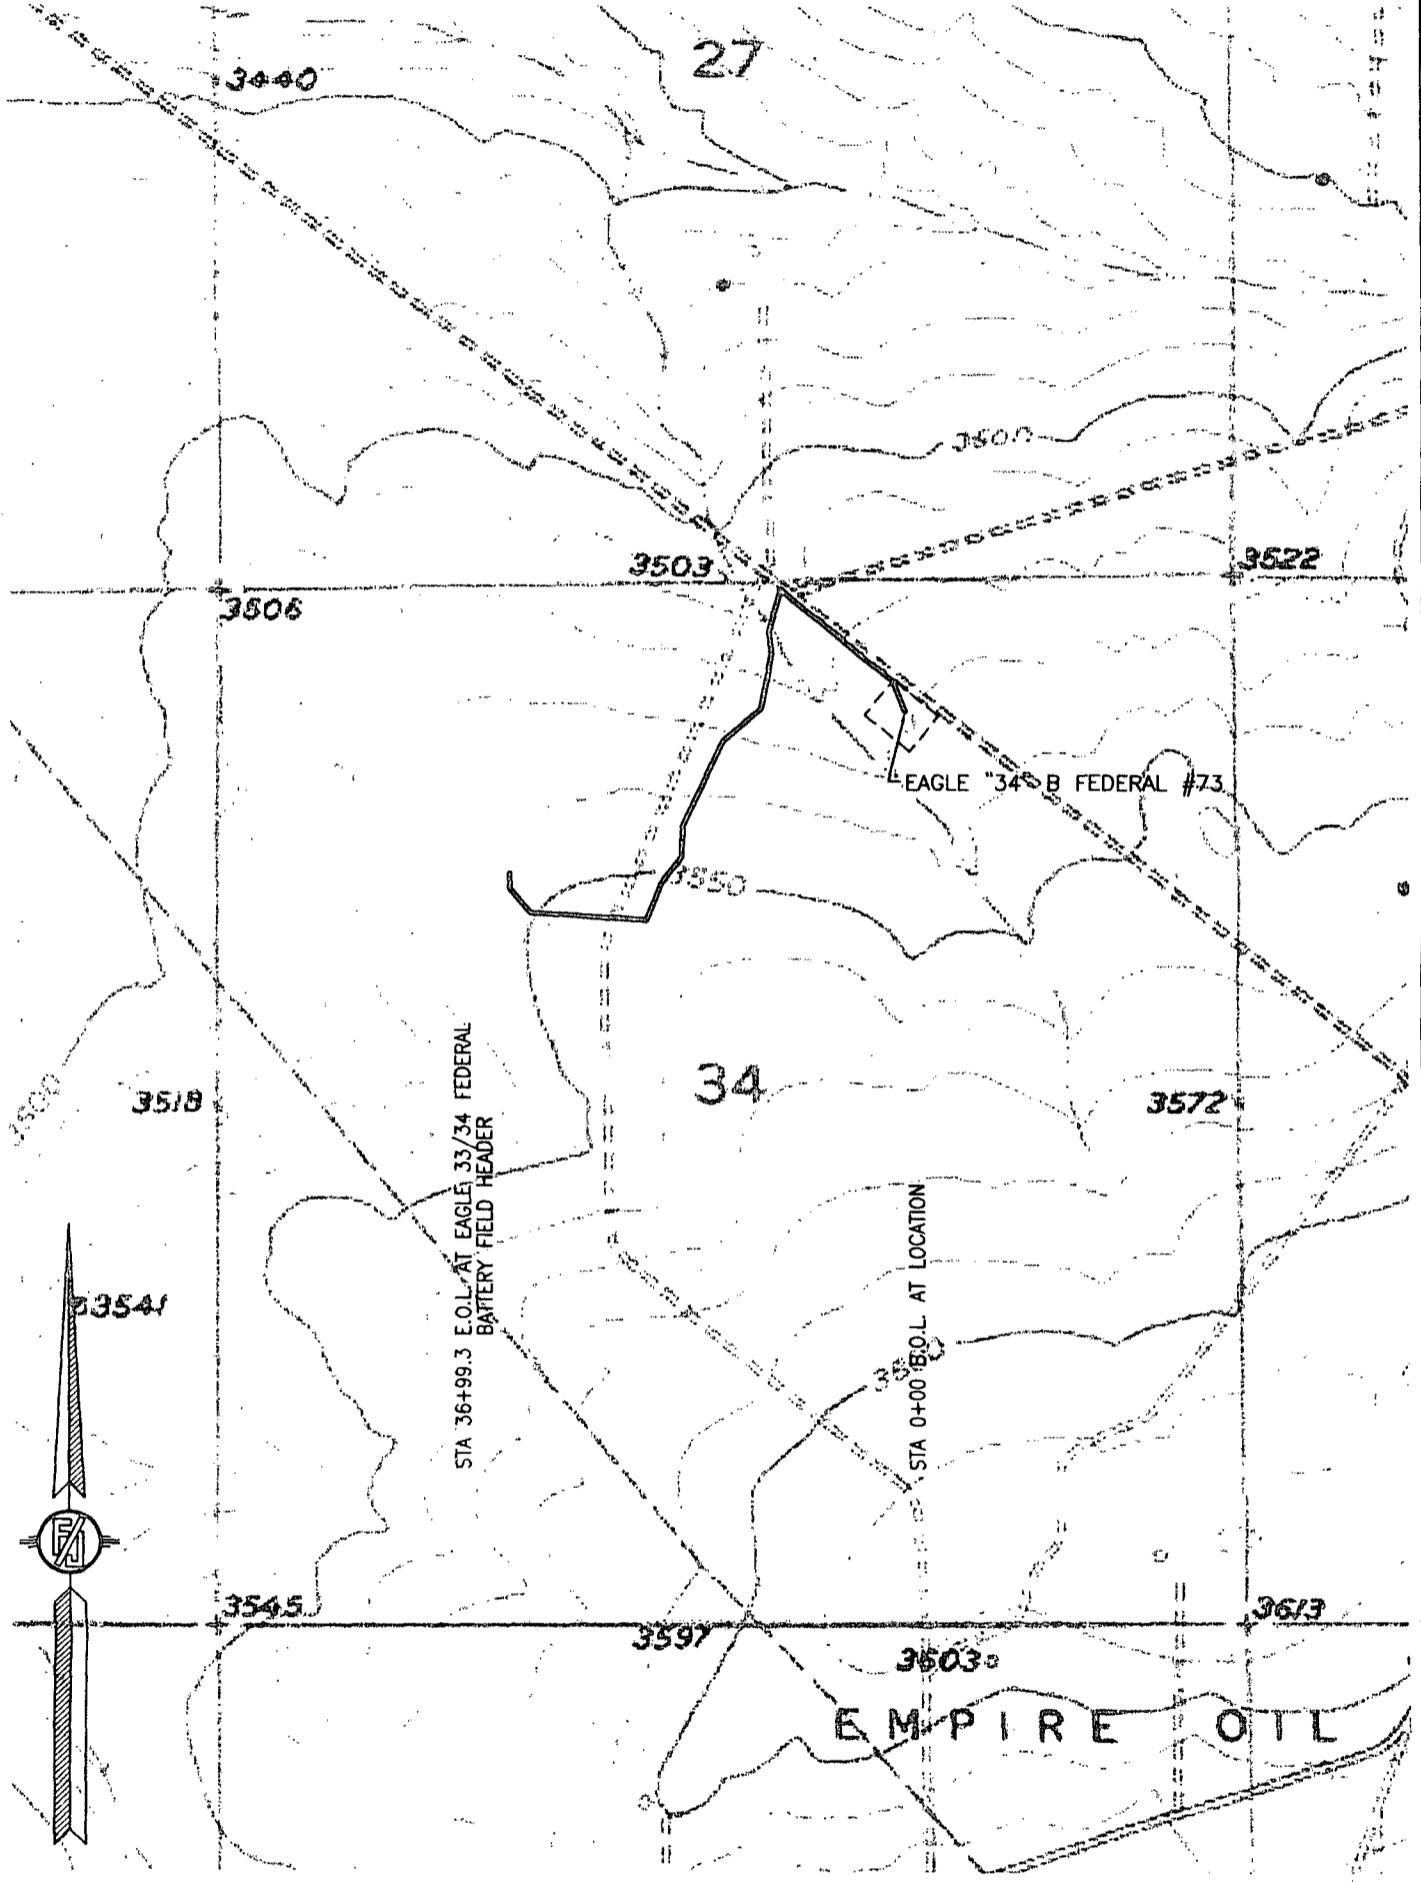

2-3" SDR 7 POLY SURFACE LINES (1-GAS & 1-PRODUCTION) FROM THE EAGLE "34" B FEDERAL #73 WELL TO AN EAGLE 33/34 FEDERAL BATTERY FIELD HEADER

MAP 6

LIME ROCK RESOURCES II-A, L.P.
 CENTERLINE SURVEY OF A PIPELINE CROSSING
 SECTION 34, TOWNSHIP 17 SOUTH, RANGE 27 EAST, N.M.P.M.
 EDDY COUNTY, STATE OF NEW MEXICO
 DECEMBER 9, 2013

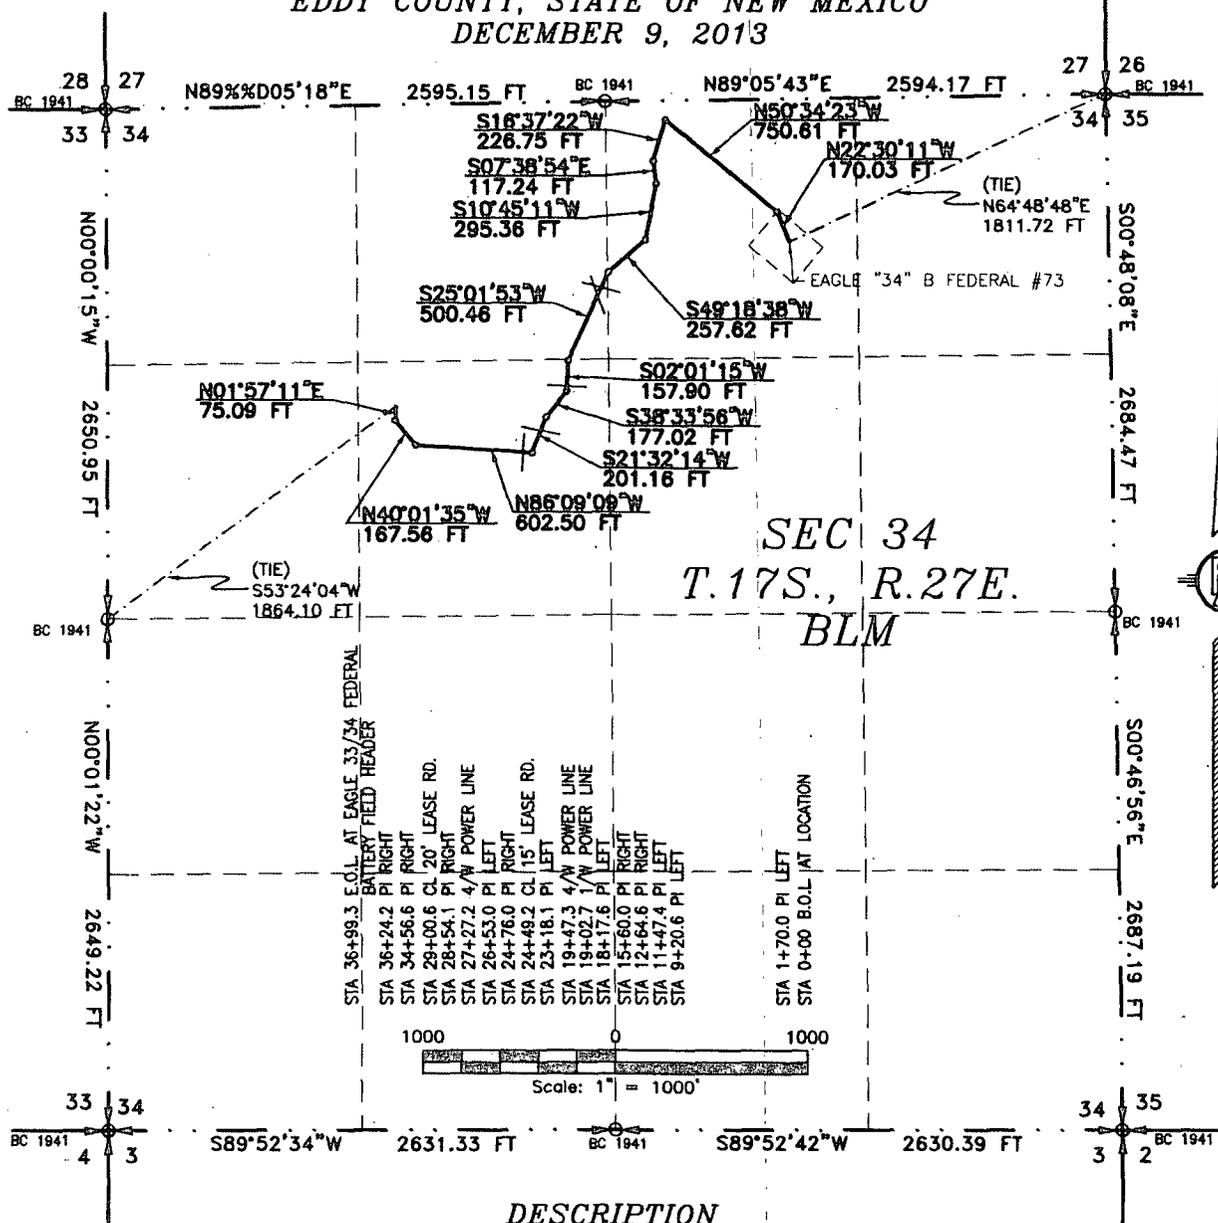

DESCRIPTION

A STRIP OF LAND 30 FEET WIDE CROSSING BUREAU OF LAND MANAGEMENT LAND IN SECTION 34, TOWNSHIP 17 SOUTH, RANGE 27 EAST, N.M.P.M., EDDY COUNTY, STATE OF NEW MEXICO AND BEING 15 FEET EACH SIDE OF THE FOLLOWING DESCRIBED CENTERLINE SURVEY:

BEGINNING AT A POINT WITHIN THE NW/4 NE/4 OF SAID SECTION 34, TOWNSHIP 17 SOUTH, RANGE 27 EAST, N.M.P.M., WHENCE THE NORTHEAST CORNER OF SAID SECTION 34, TOWNSHIP 17 SOUTH, RANGE 27 EAST, N.M.P.M. BEARS N64°48'48"E, A DISTANCE OF 1811.72 FEET;
 THENCE N22°30'11"W A DISTANCE OF 170.03 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
 THENCE N50°34'23"W A DISTANCE OF 750.61 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
 THENCE S16°37'22"W A DISTANCE OF 226.75 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
 THENCE S07°38'54"E A DISTANCE OF 117.24 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
 THENCE S10°45'11"W A DISTANCE OF 295.36 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
 THENCE S49°18'38"W A DISTANCE OF 257.62 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
 THENCE S25°01'53"W A DISTANCE OF 500.46 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
 THENCE S02°01'15"W A DISTANCE OF 157.90 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
 THENCE S38°33'56"W A DISTANCE OF 177.02 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
 THENCE S21°32'14"W A DISTANCE OF 201.16 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
 THENCE N86°09'09"W A DISTANCE OF 602.50 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
 THENCE N40°01'35"W A DISTANCE OF 167.56 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
 THENCE N01°57'11"E A DISTANCE OF 75.09 FEET TO THE TERMINUS OF THIS CENTERLINE SURVEY, WHENCE THE WEST QUARTER CORNER OF SAID SECTION 34, TOWNSHIP 17 SOUTH, RANGE 27 EAST, N.M.P.M. BEARS S53°24'04"W, A DISTANCE OF 1864.10 FEET;

SAID STRIP OF LAND BEING 3699.30 FEET OR 224.19 RODS IN LENGTH, CONTAINING 2.547 ACRES MORE OR LESS AND BEING ALLOCATED BY FORTIES AS FOLLOWS:

NW/4 NE/4	1825.79 L.F.	110.65 RODS	1.257 ACRES
NE/4 NW/4	486.98 L.F.	29.51 RODS	0.335 ACRES
SE/4 NW/4	1386.53 L.F.	84.03 RODS	0.955 ACRES

SURVEYOR CERTIFICATE

I, FILMON F. JARAMILLO, A NEW MEXICO PROFESSIONAL SURVEYOR NO. 12797, HEREBY CERTIFY THAT I HAVE CONDUCTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF, AND THAT THIS SURVEY AND PLAT MEET THE MINIMUM STANDARDS FOR LAND SURVEYING IN THE STATE OF NEW MEXICO.

IN WITNESS WHEREOF, THIS CERTIFICATE IS EXECUTED AT CARLSBAD, NEW MEXICO, THIS 12 DAY OF DECEMBER 2013

FILMON F. JARAMILLO, PLS. 12797

MADRON SURVEYING, INC.
 301 SOUTH CANAL
 CARLSBAD, NEW MEXICO 88220
 Phone (575) 234-3341

SURVEY NO. 2285

GENERAL NOTES

- THE INTENT OF THIS ROUTE SURVEY IS TO ACQUIRE AN EASEMENT.
- BASIS OF BEARING IS NMSP EAST MODIFIED TO SURFACE COORDINATES.

PECOS DISTRICT CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Lime Rock Resources II-A, L.P.
LEASE NO.:	NMNM-0557370
WELL NAME & NO.:	Eagle 34 B Federal 73
SURFACE HOLE FOOTAGE:	0745' FNL & 1650' FEL
BOTTOM HOLE FOOTAGE:	0990' FNL & 1650' FEL
LOCATION:	Section 34, T. 17 S., R 27 E., NMPM
COUNTY:	Eddy County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- General Provisions**
- Permit Expiration**
- Archaeology, Paleontology, and Historical Sites**
- Noxious Weeds**
- Special Requirements**
 - Pad Construction**
 - Cave/Karst
 - VRM
 - Cultural
- Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- Road Section Diagram**
- Drilling**
 - Cement Requirements
 - H2S Requirements
 - High Cave Karst
 - Logging Requirements
 - Waste Material and Fluids
- Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
 - Electric Lines
- Interim Reclamation**
- Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Pad Construction – A strip of the SW corner of the pad, running parallel to the side wall cut, will not be constructed to provide a buffer from the side wall.

Cave and Karst

** Depending on location, additional Drilling, Casing, and Cementing procedures may be required by engineering to protect critical karst groundwater recharge areas.

Cave/Karst Surface Mitigation

The following stipulations will be applied to minimize impacts during construction, drilling and production.

Construction:

In the advent that any underground voids are opened up during construction activities, construction activities will be halted and the BLM will be notified immediately.

No Blasting:

No blasting will be utilized for pad construction. The pad will be constructed and leveled by adding the necessary fill and caliche.

Pad Berming:

The entire perimeter of the well pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad.

- The compacted berm shall be constructed at a minimum of 12 inches high with impermeable mineral material (e.g. caliche).
- No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad.
- The topsoil stockpile shall be located outside the bermed well pad.
- Topsoil, either from the well pad or surrounding area, shall not be used to construct the berm.
- No storm drains, tubing or openings shall be placed in the berm.
- If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.
- The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed.
- Any access road entering the well pad shall be constructed so that the integrity of the berm height surrounding the well pad is not compromised. (Any access road crossing the berm cannot be lower than the berm height.)

Tank Battery Liners and Berms:

Tank battery locations and all facilities will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing to prevent tears or punctures. Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank.

Leak Detection System:

A method of detecting leaks is required. The method could incorporate gauges to measure loss, situating valves and lines so they can be visually inspected, or installing electronic sensors to alarm when a leak is present. Leak detection plan will be submitted to BLM for approval.

Automatic Shut-off Systems:

Automatic shut off, check valves, or similar systems will be installed for pipelines and tanks to minimize the effects of catastrophic line failures used in production or drilling.

Cave/Karst Subsurface Mitigation

The following stipulations will be applied to protect cave/karst and ground water concerns:

Rotary Drilling with Fresh Water:

Fresh water will be used as a circulating medium in zones where caves or karst features are expected. SEE ALSO: Drilling COAs for this well.

Directional Drilling:

Kick off for directional drilling will occur at least 100 feet below the bottom of the cave occurrence zone. SEE ALSO: Drilling COAs for this well.

Lost Circulation:

ALL lost circulation zones from the surface to the base of the cave occurrence zone will be logged and reported in the drilling report.

Regardless of the type of drilling machinery used, if a void of four feet or more and circulation losses greater than 70 percent occur simultaneously while drilling in any cave-bearing zone, the BLM will be notified immediately by the operator. The BLM will assess the situation and work with the operator on corrective actions to resolve the problem.

Abandonment Cementing:

Upon well abandonment in high cave karst areas additional plugging conditions of approval may be required. The BLM will assess the situation and work with the operator to ensure proper plugging of the wellbore.

Pressure Testing:

Annual pressure monitoring will be performed by the operator on all casing annuli and reported in a sundry notice. If the test results indicated a casing failure has occurred, remedial action will be undertaken to correct the problem to the BLM's approval.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS**Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outsloping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

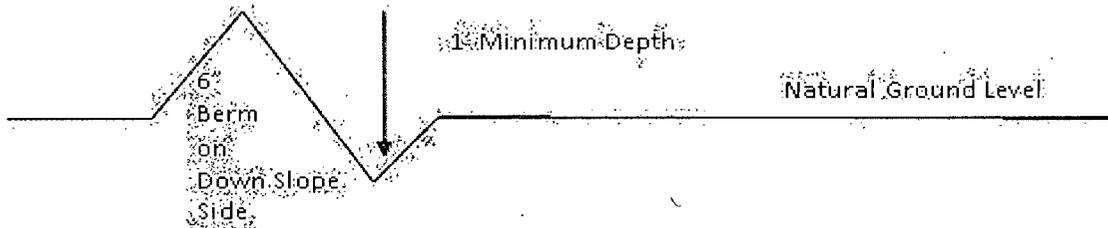

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattleguards

An appropriately sized cattleguard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattleguards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

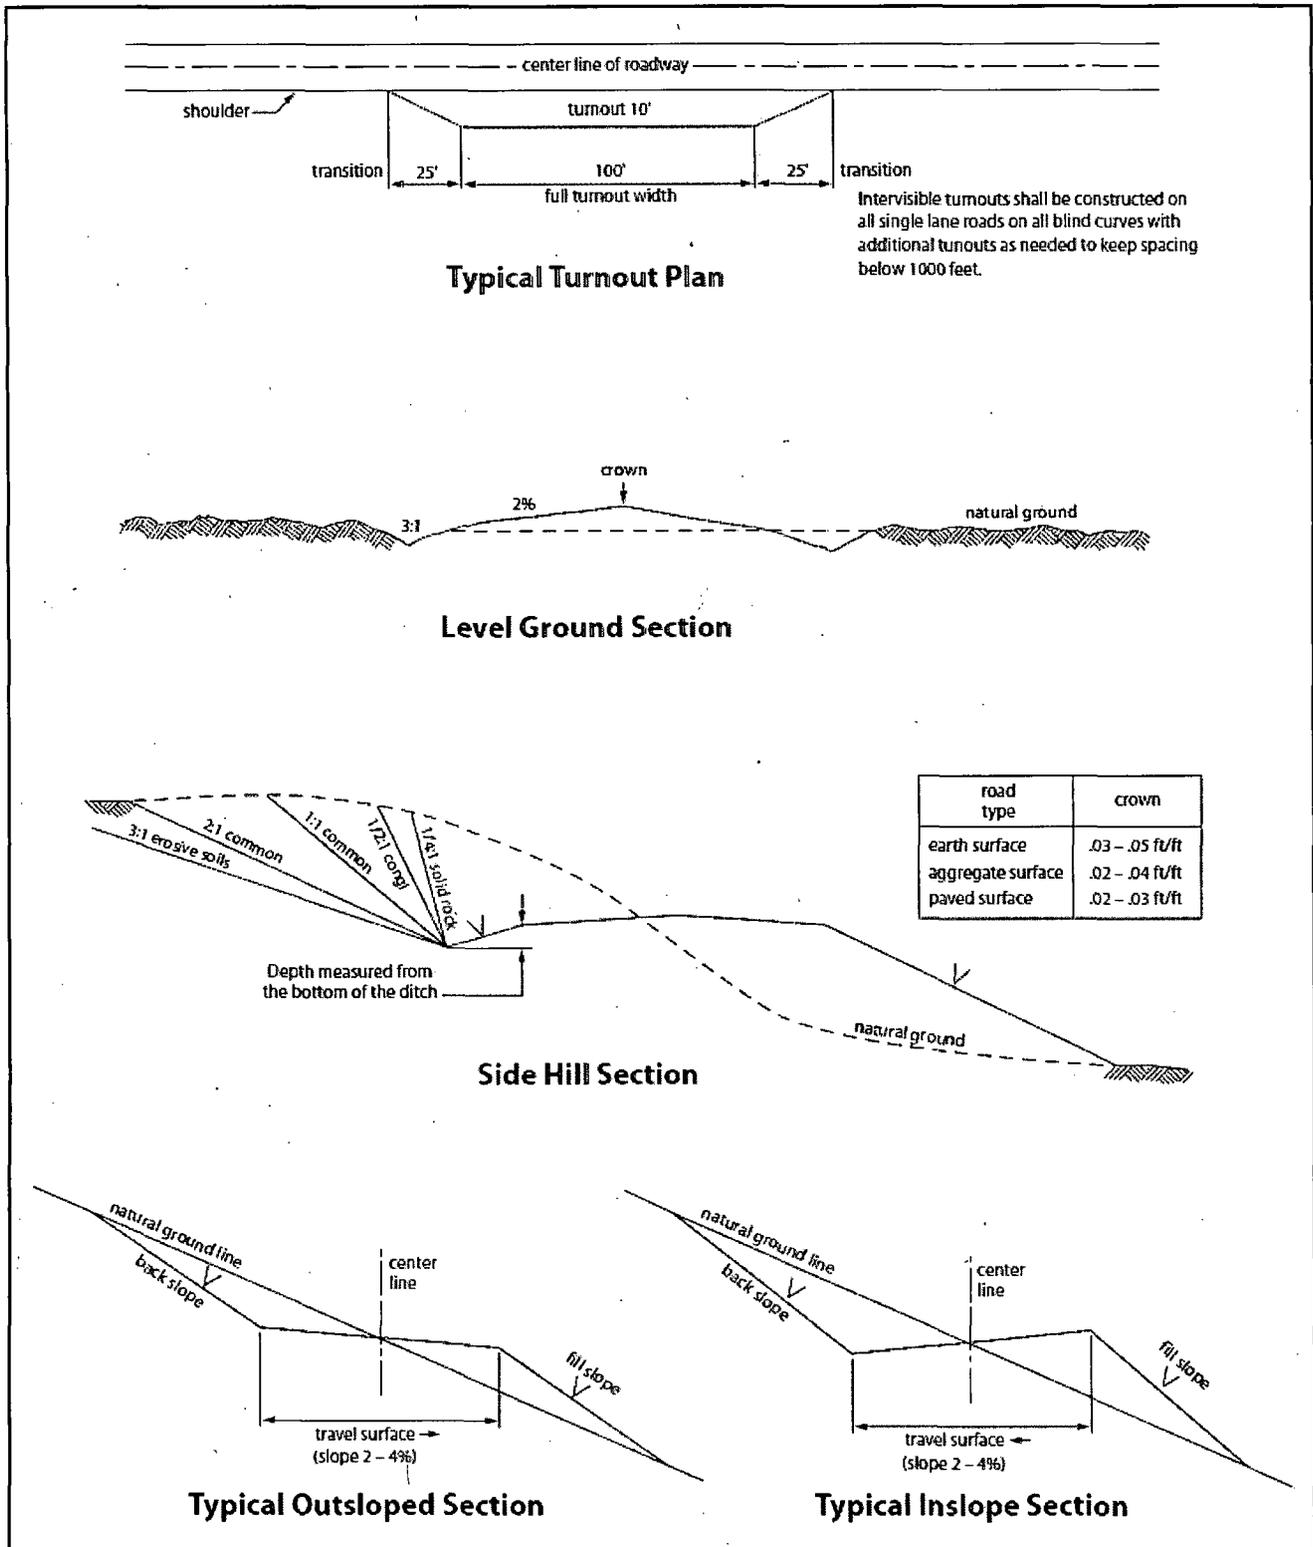


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

I. DRILLING

A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

1. A Hydrogen Sulfide (H₂S) Drilling Plan shall be activated 500 feet prior to drilling into the Yates formation. **As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.**
2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval. **If the drilling rig is removed without approval – an Incident of Non-Compliance will be written and will be a “Major” violation.**
3. **The record of the drilling rate along with the GR/N well log run from TD to surface shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies.**

B. CASING

Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

Centralizers required on surface casing per Onshore Order 2.III.B.1.f.

Wait on cement (WOC) for Water Basin:

After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least **8 hours**. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

A MINIMUM OF TWO CASING STRINGS CEMENTED TO SURFACE IS REQUIRED IN HIGH CAVE/KARST AREAS. THE CEMENT MUST BE IN A SOLID SHEATH. THEREFORE, ONE INCH OPERATIONS ARE NOT SUFFICIENT TO PROTECT CAVE KARST RESOURCES. A CASING DESIGN THAT HAS A ONE INCH JOB PERFORMED DOES NOT COUNT AS A SOLID SHEATH.

HIGH CAVE/KARST – OPERATOR HAS PROPOSED A CONTINGENCY CASING IF LOST CIRCULATION OCCURS WHILE DRILLING THE SURFACE HOLE. IF LOST CIRCULATION OCCURS WHILE DRILLING THE 7-7/8” HOLE, THE CEMENT PROGRAM FOR THE 5-1/2” CASING WILL NEED TO BE MODIFIED AND THE BLM IS TO BE CONTACTED PRIOR TO RUNNING THE CASING. A DV TOOL WILL BE REQUIRED.

Possible water flows in the Artesia Group and San Andres.

Possible lost circulation in the Artesia Group, Grayburg, and San Andres.

Contingency Surface Casing Plan:

1. The 13-3/8 inch **contingency surface casing** shall be set at approximately 375 feet and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.**
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.

- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Casing Plan without Contingency:

2. The 8-5/8 inch intermediate casing shall be set at approximately 350 feet and cemented to the surface. **(If contingency casing is used set 8-5/8" casing 50 feet below 13-3/8" shoe.)**
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.**
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
3. The minimum required fill of cement behind the 5-1/2 inch production casing is:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office.
4. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

C. CONTINGENCY PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.

2. **Contingency** - Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **13-3/8 inch** surface casing shoe shall be **2000 (2M)** psi. Operator is approved to test against the casing for the contingency plan.
3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **8-5/8 inch** surface casing shoe shall be **2000 (2M)** psi.
4. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. The tests shall be done by an independent service company utilizing a test plug **not a cup or J-packer**.
 - c. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
 - d. The results of the test shall be reported to the appropriate BLM office.
 - e. All tests are required to be recorded on a calibrated test chart. **A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.**
 - f. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.

D. DRILL STEM TEST

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

E. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

JAM 042115

II. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the

largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

III. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

X. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).