SUBMIT IN TRIPLICATE.

U. S. GEOLOGICAL SURVEY
DURANGO, COLO.

UNITED STATES

Other	Instruction.	g on
rev	erse side)	

Budget E	proved. Surcau No.	42-R1425.
30-03	39-2	<u> </u>

		NI OF THE		MON		5. LEASE DESIGNATION AND STRIAL NO.	
GEOLOGICAL SURVEY						Contract # 109 6. IF INDIAN, ALLOTTEE OR TRIBE NAME	
APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK						G. IF INDIAN, ALLOTTEE OR TRIBE NAME	
DRILL DEEPEN DEEPEN PLUG BACK						7. UNIT AGREEMENT NAME	
b. TYPE OF WELL	NILL LA	DELICIA		I EOG BA			
OIL GAS SINGLE MULTIPLE ZONE ZONE ZONE						8. FARM OR LEASE NAME	
2. NAME OF OPERATOR			_				
Tenneco Oil						9. WELL NO.	
720 South Colorado Blvd., Denver, Co. 80222						6E	
4. LOCATION OF WELL (Report location clearly	and in accordance w	th any	State requirements *)		10. FIELD AND POOL, OR WILDCAT	
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*) At surface						Basin Dakota 11. src., T., R., W., OB BLK.	
1120' FNL,						AND SURVEY OR AREA	
						Sec. 22, T26N, R5W	
14. DISTANCE IN MILES	AND DIRECTION FROM N	EAREST TOWN OR POS	T OFFIC	E.		12. COUNTY OR PARISH 13. STATE	
19.3 miles	North/Northeast	of Counseld			· · · · · · · · · · · · · · · · · · ·	Rio Arriba N.M.	
LOCATION TO NEARES PROPERTY OR LEASE	ST		16. NO	O. OF ACRES IN LEASE		NO. OF ACRES ASSIGNED TO THIS WELL	
(Also to nearest dr	lg. unit line, if any)			560.00		<u>u</u> 320.00	
 DISTANCE FROM PRO TO NEAREST WELL, OR APPLIED FOR, ON TO 	DRILLING, COMPLETED,			ROPOSED DEPTH		RY OR CABLE TOOLS	
	hether DF, RT, GR, etc.)		1 /6	550 '	Rota	22. APPROX. DATE WORK WILL START*	
6557 GR	, _,,						
23.		PROPOSED CAST	NG ANT	CEMENTING PROGRA	A Xr	A.S.A.P.	
SIZE OF HOLE	SIZE OF CASING	····		,	,		
12 11	8 5/8" New	24# K-55	00T	SETTING DEPTH	Circu	QUANTITY OF CEMENT	
7 7/8"	4 1/2" New	$\frac{24778}{10.58 - 1}$	1.6#	<u>- 350'</u>			
				-7650'	CITCU	late to surface in two sta	
	i	l	ł		i		
	al temperature s dedicated	s, pressures	, or	geologic hazaro	ds are e	expected	
·······································	NCE WITH ATTACHED	f proposal is to deep	en or n	lug back give date on pr	ocent made	FEB 25 1980 OIL CON. COM. OCTIVE your and broposed new productive	
one. If proposal is to	drill or deepen direction	nally, give pertinent	data o	n subsurface locations an	d measured	and true vertical depths. Give blowout	
i.	,. 						
<i>M</i>	X Jan					December 27, 1979	
SIGNED M Free		TIT	rr St	aff Production	Analys	DATE DECEMBER 27, 1979	
(This space for Fede	ral or State office use)						
PERMIT NO.				APPROVAL DATE			
H AS AM							
APPROVED BY		TIT:	LE			DATE	
donditions of approy	AL, HANY	. 7 1	_				
gumus	Sins ()	h Brok	Ha	te		DEC 31 1979	
DISTRICT E	NOINEFP	** *		O D O 1		U. S. GEOLOGICAL TOTAL	
	we to a men hour I	*\an In-+	ations (On Royama Sida		U. A. SHUROPOAN A	

*See Instructions On Reverse Side

STATE OF NEW MEXICO HERGY AND MINERALS DEPARTMENT

P. O. BOX 2088 SANTA FE, NEW MEXICO 8750 I

System of the state of the Standard

,			All distant	es must be fr	om the cuter	tiounderles el	The Section	1.	
perator					Lease				Well No.
- TENNECO (on	CMPANY			JICA	RILLA "B"	<u> </u>		6-E
Juit Letter	Secti		Township		Flange	'	County		ì
С	2	22	26N		5	W	Rio	Arriba	
ctual Footage Loc	. I		1						
1120		from the	North	line and	1520	fe	et from the	West	line
Fround Level Elev.		Producing Fo		<u> </u>	Pool				Dedicated Acreage:
6557		Dakot			Basi	n Dakota			W 320.00 Acres
	ne acı	eage dedica	ated to the	subject w	ell by col	ored pencil	or hachure	marks on t	the plat below.
2. If more the interest a	han o nd rov	ne lease is valty).	dedicated	to the wei	I, outline	each and 1d	entity the	Ownership	thereof (both as to working
3. If more th	an on	e lease of o	different ov	vnership is	dedicated	to the well	, have the	interests of	of all owners been consoli-
dated by	commi	mitization,	unitization.	, force-pool	ing. etc?				
- V	$\overline{}$	No II o	nower is 44	ves ⁷⁷ type (of consolid	lation			
Yes									•
			owners an	d tract des	criptions v	hich have	actually b	en consoli	dated. (Use reverse side of
this form	if nec	essary.)	 				1.1	. 1 (1	***
No allowa	ble w	ill be assign	ed to the v	vell until al	linterests	have been	consolida	ted (by co	mmunitization, unitization,
forced-poo	oling,	or otherwise) or until a	non-standa	rd unit, eli	minating su	ich interes	ts, has bee	n approved by the Commis-
sion.									
2111111111111111	1111111		1111111111111						CERTIFICATION
		1 1			į		-		
		-			1			/ hamb	certify that the information con-
		1 0			į			 	
	۱ ر	,1°,21	,		i			1	erein is true and complete to the
		1 600	\leq_{ℓ}		1			best of	my knowledge and belief.
1 35001		1/1/18	ý.			_		1	A summer -
1520'		-1-0 1,5	i `		1			Nome	M. L. Freeman
		+			— – –			1	Production Analyst
		1			1			Position	rioddollon inidlysc
		·			•				o Oil Company
		1				· I		Company	O OIL COMPANY
		1							er 27, 1979
		1			į			Date	
			800					1	
) 1	Sec.			1			
		<u>.l</u>							
				22		; }		1 hereb	y certify that the well location
=		1					FILE B	shown o	on this plat was plotted from field
=		1					5651/1		f actual surveys made by me or
=		1					8 I I. IY	under m	y supervision, and that the some
역 6 4 4 4		1 0				/ Y	Irnm.	Lagris inte	and correct to the best of my
= = =		i					-ra 9.5	1427""F	ige and belief.
<u> </u>		<u>+</u> — – –				-4-	FED.	dow.	y supervision, and that the same and correct to the best of my Ige and belief.
		1				`\	"" COIA	112 /	
		1					OIL DIS	Day Surv	eyed
		1) ,			
		1				i		1	d Professional Education
		1				i 1			THE SOLVETONTE PE
		i				!		112	1 3 3 3
4		1				!		1 de	B. Keronstr
- 		quinim	mmining	<u> </u>		<u> </u>		Certificat	1, 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
				7			4	3050	Mark!
0 330 660	-90	1320 1680 18	80 2310 20	40 200	1500	1000	800	0 1 3730	N. W.

TENNECO OIL COMPANY ROCKY MOUNTAIN DIVISION PENTHOUSE, 720 SOUTH COLORADO BOULEVARD DENVER, COLORADO 80222

DRILLING PROGRAM

DATE: November 19, 1979

LEASE: Jicarilla B

WELL NO.: 6-E

LOCATION:

1120' FNL, 1520' FWL

Sec. 22, T 26N, R 5W

Rio Arriba County, New Mexico

FIELD: Jicarilla Dakota

ELEVATION: 6560'

TOTAL DEPTH: 7650'

PROJECTED HORIZON: Dakota

SUBMITTED BY: DOUG KEATHLEY

ADDROVED BY: John 20 Cline

DK/ms

1st Rev.

ESTIMATED FORMATION TOPS

0J0	2750	(Water)
Pictured Cliffs	3130	(Gas)
Cliffhouse	4830	(Gas)
Menefee	4870	(Gas)
Point Lookout	5300	(Gas)
Gallup	6270	(Gas/0il)
Greenhorn	7220	
Dakota	7300	(Gas)

Surface Formation: San Jose

No abnormal temperatures or pressures are expected.

DRILLING, CASING, AND CEMENT PROGRAM

- 1. Move in, rig up rotary tools.
- 2. Drill a 12 1/4" hole to + 350'.
- 3. Run 8 5/8", 24#/ft, K-55, ST&C casing to T.D.
- 4. Cement with Class "B" cement with 2% CaCl2. Circulate cement to surface.
- 5. Wait on cement a minimum of twelve hours. Nipple up blowout preventer and manifold with relief lines. Pressure test to 600 psi for 30 minutes. Test pipe and blind rams.
- 6. Drill a 7 7/8" hole to T.D.
- 7. Run open hole logs.
- 8. Run 4 1/2" casing to T.D. as per casing design.
- 9. Cement in two stages with sufficient volume to circulate cement to surface. Locate DV tool above Cliffhouse to prevent lost returns in Mesa Verde. Lead in first stage with light cement (pozmix, Halliburton lite, etc.). Tail in with sufficient volume of Class "B" cement to cover the Dakota. Circulate a minimum of four hours between stages. Lead in second stage with light cement Tail in with 50 sacks Class "B" neat.
- 10. Set slips, cut casing, and install well head.
- 11. MORT.

.

12. If well is non-productive, P & A as per regulatory agency specifications.

CASING PROGRAM

Surface: 350' of 8 5/8", 24#, K-55, ST&C casing.

Production: 4 1/2", 10.5#, K-55, ST&C casing to 7,000'.

4 1/2", 11.6#, K-55, ST&C casing below 7,000'.

MUD PROGRAM

0-350 Native solids. Have sufficient viscosity to gel chemical to clean hole and run casing.

350-T.D. Low solids. Gel chemical. 32 viscosity and 10-15 water loss down through the Mancos. Before reaching Gallup, add 6% LCM and run viscosity at 38-40 seconds. After penetrating Gallup, let LCM drop.

EVALUATION

Cores and DST's: No cores or DST's are anticipated.

Deviation Surveys:

- 1. Survey surface hole every 100° . Maximum allowable deviation at surface T.D. is 1° .
- 2. From surface to total depth, Deviation surveys must be taken every 500' or each trip, whichever is first. This may entail running the TOTCO on wireline. Record each survey on the IADC Drilling Report Sheet. Maximum allowable total deviation change is 5°.

Samples:

No samples required.

Logs:

GR/Induction
Densilog
Repeat formation tester possible in Gallup.

BLOWOUT EQUIPMENT

10" 900-series, double ram hydraulic operated with closing unit and 40 gallon accumulator.

REPORTS

Drilling reports for the past 24 hours will include depth, footage, time distribution, activity breakdown, mud properties, bit record, bottom hole assembly, daily and cumulative mud costs, plus any other pertinent information, will be called into Tenneco Oil Company, Denver, Colorado, between 7:30 a.m. and 8:00 a.m.

- 303-758-7130 (office) Don Barnes.
 303-758-7287 (office) Don Barnes' private line, Monday-Friday (before 7:45 a.m.)
- 2. 303-936-0704 (home) Don Barnes, weekends and holidays.

600

3. 303-795-0221 (home) John Owen, if Don Barnes is not available.


The yellow sheet of the IADC Report to be filled out completely, the original copy of the drilling time recorder, and copies of any invoices from this well, signed and received for Tenneco Oil Company will be mailed daily to:

TENNECO OIL COMPANY
ROCKY MOUNTAIN DIVISION
PENTHOUSE, 720 SOUTH COLORADO BOULEVARD
DENVER, COLORADO 80222

ATTENTION: Drilling Department

In case of emergency, notify the following:

- 1. Mr. Don Barnes, Division Drilling Engineer 303-936-0704
- 2. Mr. John Owen, Project Drilling Engineer 303-795-0221
- 3. Mr. Mike Lacey, Division Production Manager 303-979-0509

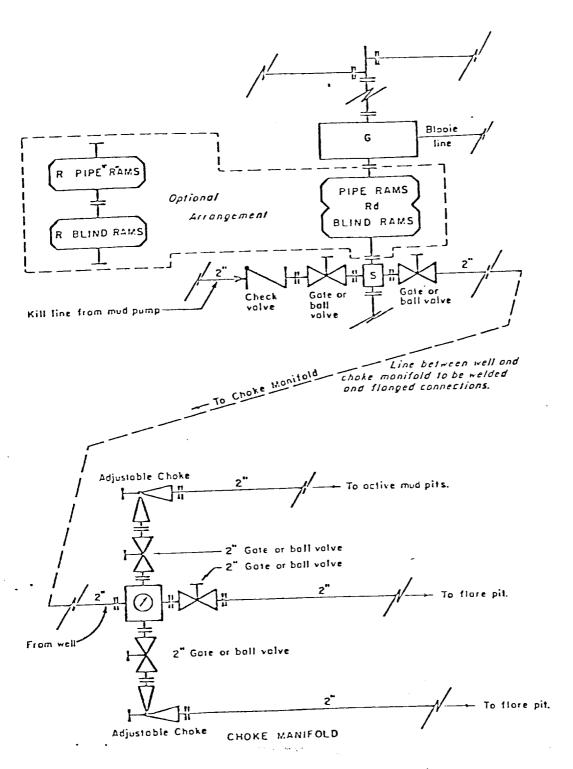

All equipment to be 3,000 psi working pressure except as noted.

Rd Double ram type preventer with two sets of rams.

- Single rom type preventer with one set of roms. R
- Drilling spool with side outlet connections for choke and kill lines. S
- Rotating head 150 psi working pressure minimum G

ARRANGEMENT C

TENNECO OIL COMPANY ROCKY MOUNTAIN DIVISION REQUIRED MINIMUM BLOWOUT PREVENTER AN CHOKE MANIFOLD J. MAGILL . 10-28-79

- 1. Existing Road please refer to Map No. 1 which shows the existing roads. New roads which will be required have been marked on this map. All existing and new roads will be properly maintained during the duration of this project.
- 2. Planned Access Roads Please refer to Map No. 1. The grade of the access roads will be consistent with that of the local terrain. The road surface will not exceed twenty feet (20') in width. Upon completion of the project, the access road will be adequately drained to control soil erosion. Drainage facilities may include ditches, water bars, culverts or any other measure deemed necessary by trained Company personnel to insure proper drainage. Gates and/or cattleguards will be installed if necessary.
- 3. Location of Existing Wells Please refer to Map No. 2.
- -4. Location of Tank Batteries, Production Facilities, and Production Gathering and Service Lines Please refer to Maps No. 1 and No. 2. Map No. 2 shows the existing roads and new proposed access roads. All known production facilities are shown on these two maps.
 - 5. Location and Type of Water Supply Water for the proposed project will be obtained from a private source.
 - 6. Source of Construction Materials No additional materials will be required to build either the access road or the proposed location.
 - 7. Methods of Handling Waste Materials All garbage and trash materials will be put into a burn pit shown on the attached Location Plat No. 1. When clean-up operations are begun on the proposed project, the burn pit with its refuse will be buried to a depth of at lease three feet (3'). A latrine, the location of which is also shown on Plat No. 1. will be provided for human waste. If large amounts of liquids are 1 left in the reserve pit after completion of the project, the pit will be fenced until the liquids have had adequate time to dry. The location clean-up will not take place until such time as the reserve pit can be properly covered over to prevent run-off from carrying any of these materials into the watershed. No earthen pit will be located on natural drainage; all earthen pits will be so constructed as to prevent leakage from occurring.

- Ancillary Facilities No camps or airstrips will be associated with this project.
- 9. Wellsite Layout Please refer to the attached Plat No. 1.
- 10. Plans for Restoration of the Surface After completion of the proposed project the location will be cleaned and leveled. The location will be left in such a condition that will enable reseeding operations to be carried out. Seed mixture as designated by the responsible government agency will be used. The reseeding operation will be performed during the time period set forth by the regulatory body. The location production equipment will be painted as designated by the responsible government agency.
- 11. Other Information The proposed site is located on the Jicarilla Indian Reservation with minerals and surface belonging to the same. The topography is level south of an existing rock ledge. The vegetation is primarily sagebrush supported by sandy soil.
- 12. Operator's Representative -

SEE DRILLING PROGNOSIS

13. Certification -

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements mad in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Tenneco Oil Company Company and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

L. Freeman

Staff Production Analyst

TENNECO OIL COMPANY

CALCULATION SHEET

