

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS


(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other ☐
2. NAME OF OPERATOR
AMOCO PRODUCTION COMPANY
3. ADDRESS OF OPERATOR
501 Airport Drive, Farmington, NM 87401
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1110' FSL x 1065' FWL
AT TOP PROD. INTERVAL: Same
AT TOTAL DEPTH: Same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>
(other) Spud and set casing	

5. LEASE
Jicarilla Apache 102
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
Jicarilla Apache
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
Jicarilla Apache 102
9. WELL NO.
11E
10. FIELD OR WILDCAT NAME
Basin Dakota
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
SW $\frac{1}{4}$, SW $\frac{1}{4}$
Section 10, T26N, R4W
12. COUNTY OR PARISH
Rio Arriba
13. STATE
NM
14. API NO.
30-039-22459
15. ELEVATIONS (SHOW DF, KDB, AND WD)
6839' GL

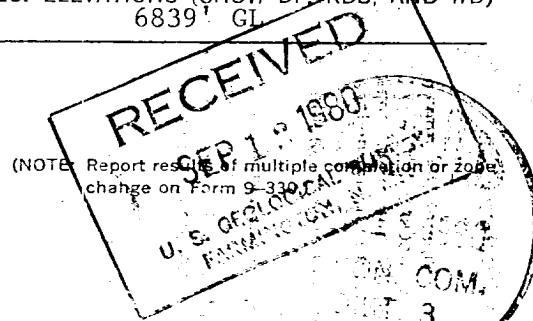

(NOTE: Report results of multiple completion or zone change on Form 9-331-C.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*
Spudded a 13 1/2" hole on 8-4-80, and drilled to 296'. Set 9 5/8" 32.3# surface casing at 290' on 8-5-80, and cemented with 315 sx of class "B" neat cement containing 2% CaCl₂. Good cement was circulated to the surface. Drilled a 8 3/4" hole to a depth of 3850'. Set 7" 20.0# intermediate casing on 8-8-80 at 3850', and cemented with 610 sx of class "B" cement containing 50:50 POZ, 6% gel, 2# medium tuf plug per sack, and .8% fluid loss additive. This was tailed in with 100 sx of class "B" neat cement. Good cement was circulated to the surface. Drilled a 6 1/4" hole to a TD of 7982'. Set a 4 1/2" production casing at 7975' on 8-17-80, and cemented with 400 sx of class "B" cement containing 50:50 POZ, 6% gel, 2# medium tuf per sack, and .8% fluid loss additive. This was tailed in with 175 sx of class "B" neat cement. Good cement was circulated to the surface. The rig was released on 8-17-80.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED E. E. SYOBODA TITLE Dist. Adm. Supvr. DATE 9-10-80

ACCEPTED FOR RECORD

(This space for Federal or State office use)

APPROVED BY 151980 TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

BY BW FARMINGTON DISTRICT

NMOC