
	1		FORM APPROVED
Form 3160-5	/	The state of the s	Budget Bureau No. 1004-0135
(June 1990)	/	2 2 2 3	Expires: March 31, 1993
	STATES	\$ 50 CO C 1 200 C	5. Lease Designation and Serial No.
	UNITED STATES	TEDIOD	SF 078064
	DEPARTMENT OF THE IN	GEMENA AUG 20	7 - A
	BUREAU OF LAND MANAC		* 4
SUND	RY NOTICES AND REPOR	TS ON WELLE	7. If Unit or CA. Agreement Designation
Do not use this form	n for proposals to drill or to deepen or	r reentry to a diffe gat reservo	7.34 V
Use	"APPLICATION FOR PERMIT" fo	or such proposals mer	Carson Unit
	SUBMIT IN TRIPLICATE		1 1 20
1. Type of Well		The second secon	8. Well Name and No. Carson Unit No. 12-13
Oil Well	Gas Well X Oth	her Water Supply W	9. API Well No.
2. Name of Operator			///
Central Resources, I	nc.		30-045-0538-5401
3. Address and Telephone No.			10. Field and Pool, or Exploratory Area
P.O. Box 1247 Bloc	omfield, New Mexico 87413 (5	05)-632-3476	Bisti Lower Gallup
1.0. Box 12 77, Brown	Sec., T., R., M., or Survey Description	on)	11. County or Parish, State
1000 FCL 660 EW	T Sec 13 T25N R12W	V	San Juan County, New Mexico
1980 FSL, 000 TW	TE BOX(s) TO INDICATE NATU	RE OF NOTICE, REPORT,	OR OTHER DATA
12. CHECK APPROPRIA TYPE OF SUBMISSIO	N	TYPE O	A ACTION
THE OF SUBMISSION	X	Abandonment	Change of Plans
V November of Intent		Recompletion	New Construction
X Notice of Intent		Plugging Back	Non-Routine Fracturing
		Casing Repair	Water Shut-Off
Subsequent Report		Altering Casing	Conversion to Injection
		- ·	Dispose Water
Final Abandonmen	t Notice	Other	(Note: Report results of multiple completion on Well
	Ì		Completion or Recompletion Report and Log form.)
	Closely state all pertines	at dates, including estimated date	of starting any proposed work. If well is
<ol> <li>Describe Proposed or Compl</li> </ol>	eted Operations (Clearly state all pertiner	vertical depths for all markers ar	nd zones pertinent to this work.)*
11 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	surface locations and measured and true		
directionally drilled, give sub	osurface locations and measured and true	accordance With reutilation	mix Findiction edutoment with 00 tollies
directionally drilled, give sub	osurface locations and measured and true	accordance With reutilation	mix Findiction edutoment with 00 tollies
directionally drilled, give sub Central Resources, well will be plugge	osurface locations and measured and true Inc. intends to plug the well in d as specified. Perforate and s	accordance with regulation accordance with regulation and the used unless are unless as a second accordance with regulation accor	ons. Production equipment will be removed and the ess casing can be recovered over the specified
directionally drilled, give sub Central Resources, well will be plugge interval or there is	osurface locations and measured and true.  Inc. intends to plug the well in a specified. Perforate and see sevidence cement is in place be	accordance with regulation accordance with regulation and the used unless are unless as a second accordance with regulation accor	mix Findiction edutoment with 00 tollies
directionally drilled, give sub Central Resources, well will be plugge interval or there is	osurface locations and measured and true Inc. intends to plug the well in d as specified. Perforate and s s evidence cement is in place b	accordance with regulation accordance with regulation and see the casing.	ess casing can be recovered over the specified
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa	Inc. intends to plug the well in das specified. Perforate and see evidence cement is in place be:  rmington BLM office at 505-59	accordance with regulation accordance with regulation and accordance with regulation and accordance with regulation and accordance with regulation accordanc	ess casing can be recovered over the specified
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa	Inc. intends to plug the well in d as specified. Perforate and s evidence cement is in place be:  rmington BLM office at 505-59	accordance with regulation accordance with regulation and accordance with regulation a	ess casing can be recovered over the specified  commencement of plugging operations.
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa b. Pull all retrie	Inc. intends to plug the well in d as specified. Perforate and se evidence cement is in place be:  rmington BLM office at 505-59 vable downhole production eques 48.70' and spot 50' of cement of	accordance with regulation accordance with regul	ess casing can be recovered over the specified commencement of plugging operations.
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa b. Pull all retrie c. Set a CIBP at	Inc. intends to plug the well in d as specified. Perforate and se evidence cement is in place be: rmington BLM office at 505-59 vable downhole production equals 4870' and spot 50' of cement of ement plug from 3820' to 3920'.	accordance with regulation accordance with regul	ess casing can be recovered over the specified commencement of plugging operations.  Ilup at 4872'. ncos at 3870'.
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa b. Pull all retrie c. Set a CIBP at d. Spot a 100' co	Inc. intends to plug the well in d as specified. Perforate and seed of the second of t	eccordance with regulation accordance with regulation squeeze will be used unlike the casing.  29-8907 24 hours prior to alipment.  In top at top of Lower Galacross the top of the Manacross the top of the Manacross the top of the Menacross the to	ess casing can be recovered over the specified commencement of plugging operations.  Illup at 4872'. ncos at 3870'. nefee at 2072'.
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa b. Pull all retrie c. Set a CIBP at d. Spot a 100' co	Inc. intends to plug the well in d as specified. Perforate and seed of the second of t	eccordance with regulation accordance with regulation squeeze will be used unlike the casing.  29-8907 24 hours prior to alipment.  In top at top of Lower Galacross the top of the Manacross the top of the Manacross the top of the Menacross the to	ess casing can be recovered over the specified commencement of plugging operations.  Illup at 4872'. ncos at 3870'. nefee at 2072'.
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa b. Pull all retrie c. Set a CIBP at d. Spot a 100' co e. Spot a 100' co	Inc. intends to plug the well in d as specified. Perforate and se evidence cement is in place be: rmington BLM office at 505-59 vable downhole production equal 4870' and spot 50' of cement of ement plug from 3820' to 3920' ement plug from 2022' to 2122' ement plug from 1162' to 1262'.	accordance with regulations agreeze will be used unlike the casing.  29-8907 24 hours prior to a top at top of Lower Galacross the top of the Manacross the top of the Menacross the top of the Menacross the top of the Pict	ess casing can be recovered over the specified  commencement of plugging operations.  Illup at 4872'.  ncos at 3870'.  nefee at 2072'.  ured Cliffs at 1212'.
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa b. Pull all retrie c. Set a CIBP at d. Spot a 100' co f. Spot a 100' co	Inc. intends to plug the well in d as specified. Perforate and se evidence cement is in place be: rmington BLM office at 505-59 vable downhole production equal 4870' and spot 50' of cement of ement plug from 3820' to 3920' ement plug from 1162' to 1262' ement plug from 150' to surface ement plug from 150' to surface	eccordance with regulation required squeeze will be used unlike the casing.  99-8907 24 hours prior to sipment. In top at top of Lower Galacross the top of the Manacross the top of the Menacross the top of the Picter across the surface casing	ess casing can be recovered over the specified  commencement of plugging operations.  Ilup at 4872'. ncos at 3870'. nefee at 2072'. ured Cliffs at 1212'. g shoe at 100'.
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa b. Pull all retrie c. Set a CIBP at d. Spot a 100' co f. Spot a 100' co	Inc. intends to plug the well in d as specified. Perforate and se evidence cement is in place be: rmington BLM office at 505-59 vable downhole production equal 4870' and spot 50' of cement of ement plug from 3820' to 3920' ement plug from 2022' to 2122' ement plug from 1162' to 1262'.	eccordance with regulation required squeeze will be used unlike the casing.  99-8907 24 hours prior to sipment. In top at top of Lower Galacross the top of the Manacross the top of the Menacross the top of the Picter across the surface casing	ess casing can be recovered over the specified  commencement of plugging operations.  Ilup at 4872'. ncos at 3870'. nefee at 2072'. ured Cliffs at 1212'. g shoe at 100'.
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa b. Pull all retrie c. Set a CIBP at d. Spot a 100' co e. Spot a 100' co f. Spot a 100' co g. Spot a 150' co h. Cut wellhead	Inc. intends to plug the well in d as specified. Perforate and se evidence cement is in place be: rmington BLM office at 505-59 vable downhole production equal 4870' and spot 50' of cement of ement plug from 3820' to 3920' ement plug from 2022' to 2122' ement plug from 1162' to 1262' ement plug from 150' to surface I and install dry hole marker. Cl	ecordance with regulation required squeeze will be used unlike the casing.  99-8907 24 hours prior to sipment. In top at top of Lower Galacross the top of the Maracross the top of the Meracross the top of the Picter across the surface casing lear and remediate location.	ess casing can be recovered over the specified  commencement of plugging operations.  Ilup at 4872'. ncos at 3870'. nefee at 2072'. nured Cliffs at 1212'. g shoe at 100'. on.
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa b. Pull all retrie c. Set a CIBP at d. Spot a 100' ce e. Spot a 100' ce g. Spot a 150' ce h. Cut wellhead	Inc. intends to plug the well in a das specified. Perforate and seed evidence cement is in place between the second of the secon	accordance with regulation required squeeze will be used unlike thind the casing.  29-8907 24 hours prior to sipment. In top at top of Lower Galacross the top of the Maracross the top of the Maracross the top of the Picter across the surface casing lear and remediate location.	ess casing can be recovered over the specified  commencement of plugging operations.  Ilup at 4872'. ncos at 3870'. nefee at 2072'. ured Cliffs at 1212'. g shoe at 100'. on.  ber of P&A procedures you have requested and the
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa b. Pull all retrie c. Set a CIBP at d. Spot a 100' ce e. Spot a 100' ce g. Spot a 150' ce h. Cut wellhead	Inc. intends to plug the well in a das specified. Perforate and seed evidence cement is in place between the second of the secon	accordance with regulation required squeeze will be used unlike thind the casing.  29-8907 24 hours prior to sipment. In top at top of Lower Galacross the top of the Maracross the top of the Maracross the top of the Picter across the surface casing lear and remediate location.	ess casing can be recovered over the specified  commencement of plugging operations.  Ilup at 4872'. ncos at 3870'. nefee at 2072'. ured Cliffs at 1212'. g shoe at 100'. on.  ber of P&A procedures you have requested and the
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa b. Pull all retrie c. Set a CIBP at d. Spot a 100' co e. Spot a 100' co f. Spot a 100' co g. Spot a 150' co h. Cut wellhead	Inc. intends to plug the well in d as specified. Perforate and seed evidence cement is in place between the second of the second	accordance with regulation required squeeze will be used unlike thind the casing.  29-8907 24 hours prior to sipment. In top at top of Lower Galacross the top of the Maracross the top of the Maracross the top of the Picter across the surface casing lear and remediate location.	ess casing can be recovered over the specified  commencement of plugging operations.  Ilup at 4872'. ncos at 3870'. nefee at 2072'. nured Cliffs at 1212'. g shoe at 100'. on.
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa b. Pull all retrie c. Set a CIBP at d. Spot a 100' co e. Spot a 100' co f. Spot a 100' co g. Spot a 150' co h. Cut wellhead	Inc. intends to plug the well in d as specified. Perforate and seed evidence cement is in place between the second of the second	accordance with regulation requested and squeeze will be used unlike the casing.  29-8907 24 hours prior to sipment. In top at top of Lower Galacross the top of the Maracross the top of the Meracross the top of the Picter across the surface casing lear and remediate location.  A procedures, the number of the increase and increase the surface casing lear and remediate location.  A procedures, the number of the increase and increase	ess casing can be recovered over the specified  commencement of plugging operations.  Ilup at 4872'. ncos at 3870'. nefee at 2072'. ured Cliffs at 1212'. g shoe at 100'. on.  ber of P&A procedures you have requested and the 1 to complete this abandonment.
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa b. Pull all retrie c. Set a CIBP at d. Spot a 100' co e. Spot a 100' co f. Spot a 100' co g. Spot a 150' c h. Cut wellhead  Please take into ac available equipment	Inc. intends to plug the well in d as specified. Perforate and seed evidence cement is in place between the second of the second	accordance with regulation required squeeze will be used unlike thind the casing.  29-8907 24 hours prior to sipment. In top at top of Lower Galacross the top of the Maracross the top of the Maracross the top of the Picter across the surface casing lear and remediate location.	ess casing can be recovered over the specified  commencement of plugging operations.  Ilup at 4872'. ncos at 3870'. nefee at 2072'. ured Cliffs at 1212'. g shoe at 100'. on.  ber of P&A procedures you have requested and the
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa b. Pull all retrie c. Set a CIBP at d. Spot a 100' co e. Spot a 100' co f. Spot a 100' co g. Spot a 150' c h. Cut wellhead  Please take into ac available equipment	Inc. intends to plug the well in d as specified. Perforate and se evidence cement is in place be: rmington BLM office at 505-59 vable downhole production equation and spot 50' of cement of ement plug from 3820' to 3920' ement plug from 2022' to 2122' ement plug from 1162' to 1262' ement plug from 150' to surface I and install dry hole marker. Claudin and allow Central Resources, foregoing is true and correct	accordance with regulation requested and squeeze will be used unlike the casing.  29-8907 24 hours prior to sipment. In top at top of Lower Galacross the top of the Maracross the top of the Meracross the top of the Picter across the surface casing lear and remediate location.  A procedures, the number of the increase and increase the surface casing lear and remediate location.  A procedures, the number of the increase and increase	ess casing can be recovered over the specified  commencement of plugging operations.  Ilup at 4872'. ncos at 3870'. nefee at 2072'. ured Cliffs at 1212'. g shoe at 100'. on.  ber of P&A procedures you have requested and the 1 to complete this abandonment.
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa b. Pull all retrie c. Set a CIBP at d. Spot a 100' ce e. Spot a 100' ce g. Spot a 150' ce h. Cut wellhead  Please take into acc available equipment  14. I hereby certify that the Signed  Rodney L. Set	Inc. intends to plug the well in d as specified. Perforate and se evidence cement is in place be: rmington BLM office at 505-59 vable downhole production equal 4870' and spot 50' of cement of ement plug from 3820' to 3920' ement plug from 2022' to 2122' ement plug from 1162' to 1262' ement plug from 150' to surface I and install dry hole marker. Claudin and allow Central Resources, foregoing is trae and correct Title	accordance with regulation requested and squeeze will be used unlike the casing.  29-8907 24 hours prior to sipment. In top at top of Lower Galacross the top of the Maracross the top of the Meracross the top of the Picter across the surface casing lear and remediate location.  A procedures, the number of the increase and increase the surface casing lear and remediate location.  A procedures, the number of the increase and increase	ess casing can be recovered over the specified  commencement of plugging operations.  Ilup at 4872'. ncos at 3870'. nefee at 2072'. ured Cliffs at 1212'. g shoe at 100'. on.  ber of P&A procedures you have requested and the 1 to complete this abandonment.  Date  June 28, 2000
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa b. Pull all retrie c. Set a CIBP at d. Spot a 100' ce e. Spot a 100' ce g. Spot a 100' ce g. Spot a 150' c h. Cut wellhead  Please take into ac available equipment  14. I hereby certify that the Signed Rodney L. Sed  (This space for Federa	Inc. intends to plug the well in d as specified. Perforate and se evidence cement is in place be: rmington BLM office at 505-59 vable downhole production equal 4870' and spot 50' of cement of ement plug from 3820' to 3920' ement plug from 2022' to 2122' ement plug from 1162' to 1262' ement plug from 150' to surface I and install dry hole marker. Claudin and allow Central Resources, foregoing is trae and correct Title	accordance with regulations aqueeze will be used unlike the casing.  29-8907 24 hours prior to sipment. In top at top of Lower Galacross the top of the Maracross the top of the Meracross the top of the Picter across the surface casing lear and remediate locations. A procedures, the number of the increase in the case of the picter and remediate locations. Inc. until the end of 200 in the District Manager	ess casing can be recovered over the specified  commencement of plugging operations.  Ilup at 4872'. ncos at 3870'. nefee at 2072'. ured Cliffs at 1212'. g shoe at 100'. on.  ber of P&A procedures you have requested and the 1 to complete this abandonment.
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa b. Pull all retrie c. Set a CIBP at d. Spot a 100' ce e. Spot a 100' ce g. Spot a 150' ce g. Spot a 150' c h. Cut wellhead  Please take into ac available equipment  14. I hereby certify that the Signed Rodney L. Sef  (This space for Federa Approved by	Inc. intends to plug the well in d as specified. Perforate and se evidence cement is in place between the second of the second o	accordance with regulations aqueeze will be used unlike the casing.  29-8907 24 hours prior to sipment. In top at top of Lower Galacross the top of the Maracross the top of the Meracross the top of the Picter across the surface casing lear and remediate locations. A procedures, the number of the increase in the case of the picter and remediate locations. Inc. until the end of 200 in the District Manager	ess casing can be recovered over the specified  commencement of plugging operations.  Illup at 4872'. ncos at 3870'. nefee at 2072'. ured Cliffs at 1212'. g shoe at 100'. on.  ber of P&A procedures you have requested and the 1 to complete this abandonment.  Date  June 28, 2000
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa b. Pull all retrie c. Set a CIBP at d. Spot a 100' ce e. Spot a 100' ce g. Spot a 100' ce g. Spot a 150' c h. Cut wellhead  Please take into ac available equipment  14. I hereby certify that the Signed Rodney L. Sed  (This space for Federa	Inc. intends to plug the well in d as specified. Perforate and se evidence cement is in place between the second of the second o	accordance with regulations aqueeze will be used unlike the casing.  29-8907 24 hours prior to sipment. In top at top of Lower Galacross the top of the Maracross the top of the Meracross the top of the Picter across the surface casing lear and remediate locations. A procedures, the number of the increase in the case of the picter and remediate locations. Inc. until the end of 200 in the District Manager	ess casing can be recovered over the specified  commencement of plugging operations.  Illup at 4872'. ncos at 3870'. nefee at 2072'. ured Cliffs at 1212'. g shoe at 100'. on.  ber of P&A procedures you have requested and the 1 to complete this abandonment.  Date  June 28, 2000
directionally drilled, give sub Central Resources, well will be plugge interval or there is Proposed procedure a. Notify the Fa b. Pull all retrie c. Set a CIBP at d. Spot a 100' co e. Spot a 100' co g. Spot a 150' co h. Cut wellhead  Please take into ac available equipment  14. I hereby certify that the Signed Rodney L. Sed  (This space for Federa Approved by Conditions of approva	Inc. intends to plug the well in d as specified. Perforate and seed evidence cement is in place between the second of the second	accordance with regulation requested and sequeze will be used unlike the casing.  29-8907 24 hours prior to sipment. In top at top of Lower Galacross the top of the Maracross the top of the Meracross the top of the Picter across the surface casing lear and remediate location. A procedures, the number of the casing the case of the procedures and the case of the procedures. The number of the procedures are not procedured to the procedure are not procedured	ess casing can be recovered over the specified  commencement of plugging operations.  Illup at 4872'. ncos at 3870'. nefee at 2072'. ured Cliffs at 1212'. g shoe at 100'. on.  ber of P&A procedures you have requested and the 1 to complete this abandonment.  Date  June 28, 2000

## CENTRAL RESOURCES, INC.

## Carson Unit No. 12-13

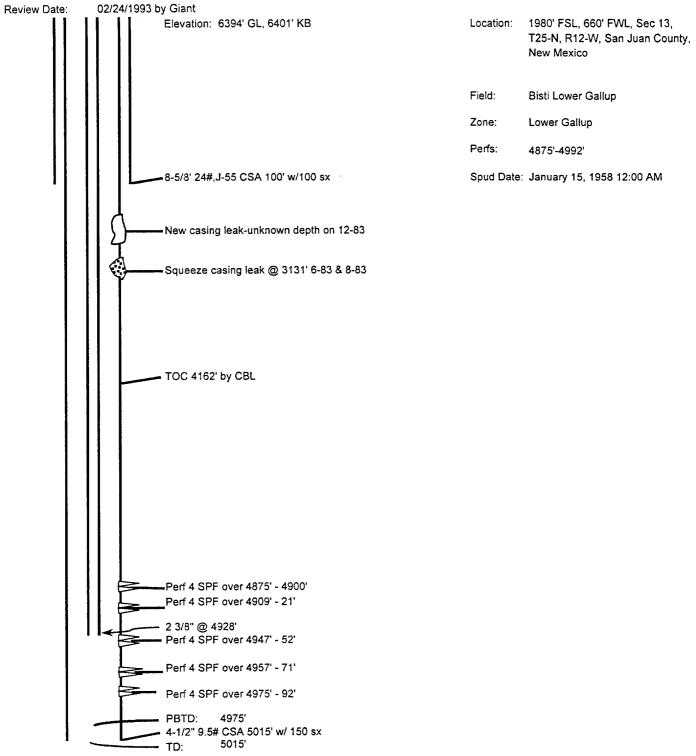

Patty Shelton, Printed on 6/28/00