


BLOWOUT PREVENTER SPECIFICATION

WEK DRILLING CO., INC. - Rig 1 & 3.

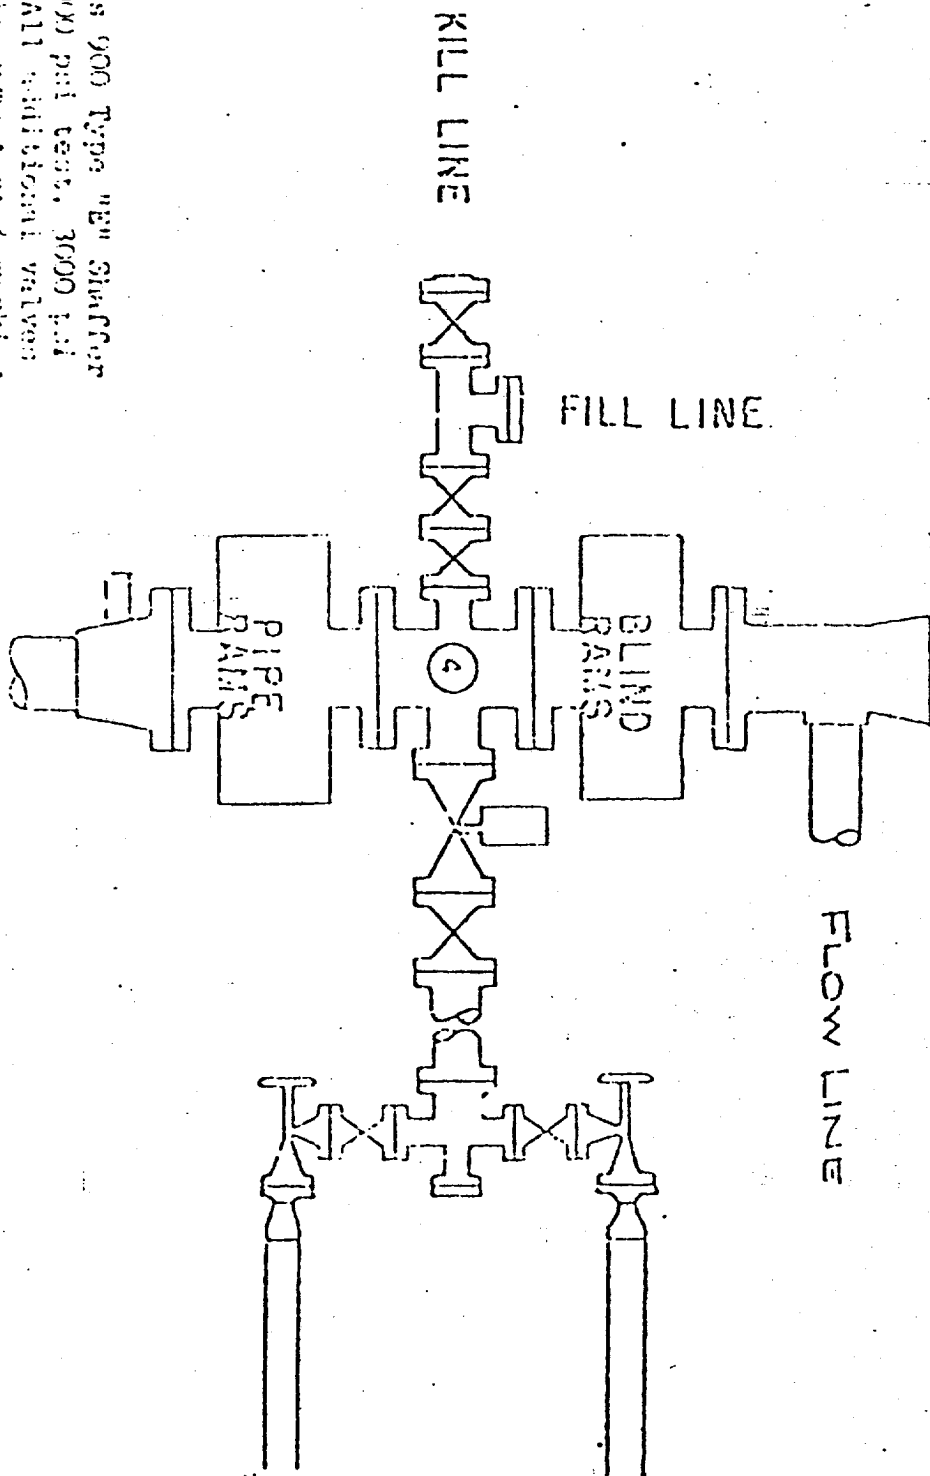

BOP's are 10" Series 900 Type "W" Shaffer Double Hydraulic 6000 psi test, 3000 psi working pressure. All additional valves 2 connected to the same port & working pressure.