
| Submit 3 Copies To Appropriate District | State of New 3 | | SIP | Form C-103 Revised March 25, 1999 |
|--|--------------------------------------|---------------------------|--|--|
| Office District I 1625 N. French Dr., Hobbs, NM 88240 | Energy, Minerals and N | atural Resources | WELL API NO. 30005-62070 | Revised (video, 25) |
| District II | OUL CONSERVATION DIVISION | | | Lease |
| 811 South First, Artesia, NM 88210 District III | 2040 South Pacheco | | 5. Indicate Type of STATE | FEE 🗆 |
| 1000 Rio Brazos Rd., Aztec, NM 87410 District IV | Danta 1 0, 1 1212 0 1 0 1 | | 6. State Oil & Gas | |
| 2040 South Pacheco, Santa Fe, NM 87505 | | | | To it A annument Name: |
| SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.) | | | 7. Lease Name or Unit Agreement Name: Twin Lakes San Andres Unit | |
| 1. Type of Well: | Other Inject | ion | | |
| Oil Well Gas Well L 2. Name of Operator | Other injects | | 7. Well No. | |
| Concho Oil & Gas Corp. | | | 8. Pool name or V | Vildagt |
| 3 Address of Operator | | | 8. Pool name or V Twin Lakes; San A | |
| 110 W. Louisiana Ste 410; Midland, T | x 79701 | | 1 WIII Balles, San 12 | |
| 4. Well Location | | | | |
| Unit Letter_F : 2310_Feet f | from the <u>NORTH</u> li | | | |
| Section 25 | Township 8S Ran | | NMPM Chaves | County |
| | 0. Elevation (Show whether 3930.2 GR | | | |
| 11 Check Ann | propriate Box to Indicat | e Nature of Notice, | Report or Other D |)ata |
| NOTICE OF INTE | ENTION TO: | / SUE | SEQUENT REP | OK 1 OF |
| PERFORM REMEDIAL WORK F | LUG AND ABANDON | REMEDIAL WOF | RK 🗀 | ALTERING CASING |
| | CHANGE PLANS | COMMENCE DR | RILLING OPNS. | PLUG AND ABANDONMENT |
| | MULTIPLE COMPLETION | CASING TEST A | AND | |
| | | OTHER: | | |
| OTHER: 12. Describe proposed or completed | operations (Clearly state a | Il pertinent details, and | give pertinent dates, i | ncluding estimated date |
| 12. Describe proposed or completed of starting any proposed work). So or recompilation. | SEE RULE 1103. For Mult | iple Completions: Atta | ch wellbore diagram o | of proposed completion |
| Concho Oil & Gas Corp. resp | ectfully request appr | oval to plug & aba | ndon the Twin La | akes San Andres |
| Unit No. 1 according to the form 1. Notify NMOCD Artesia | Mowing procedure. | cement of procedu | re. 1271 1819 1819 1819 1819 1819 1819 1819 18 | |
| 1. Notify NMOCD Artesia . 2. Set 170' plug @ 2480-2 | 2650' — 7 49 | | 617181¢ | 12021223 |
| 3. Circ hole w/ mud. | | | (5 ¹⁸) | \@\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\ |
| 4. Set 100' plug @ 1905-2 | 2005'. | | Z COT | · marr |
| 5 Cut csa @ 1545' & PO | OH. | | 12 10 | THEIR STATE |
| c Set 100' emt blug @ 14 | 195-1595', WOC & tag | • | TE AREC | ARTESIA A |
| 7. Set 100' plug @-820-92 | 20°. 750 - 850 | | (S) 000 · | Altico |
| 8. Circ cmt from 177' to su 9. Cut off wellhead & insta | uпасе. oli dov hole marker | | * * * | |
| 9. Cut off wellhead & insta | all dry Hole Hidrich. | | ************************************** | e, see |
| 1 | | | 11 11 6 | |
| I hereby certify that the information | above is true and complete t | to the best of my knowl | edge and belief. | |
| SIGNATURE | THE TH | TLE <u>Production Ar</u> | nalystDATE | 10-18-01 |
| Type or print name Terri Stath | em) | Telephone No. 9 | 15/683-7443 | 5 |
| (This space for State use) | | rle Su | Rd Bed & | DATE 11-13-01 |
| APPPROVED BYConditions of approval, if any: | | TDD | Y | |

TLSAU #1

Formerly - O'Brien F #9

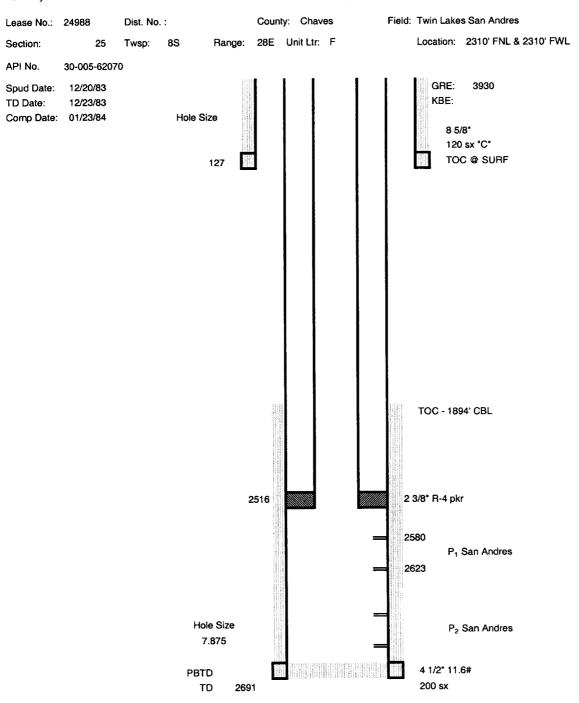

Original Perf Details: P1: 2590, 90.5, 91, 94, 94.5, 95, 98.5, 99, 99.5, 2600, 00.5, 01, 08, 08.5, 09, 09.5, 12.5, 13, 13.5, 14, 18, 19, 20

7500 gals 28% acid

Jun-89 Add P1: 2580, 81, 82, 84, 85, 86, 88, 89, 92, 93, 96, 97, 2603, 06, 15, 16, 17, 22, 23

No treatment