

### STATE OF NEW MEXICO

### ENERGY AND MINERALS DEPARTMENT

OIL CONSERVATION DIVISION AZTEC DISTRICT OFFICE

1000 RIO BRAZOS ROAD AZTEC, NEW MEXICO 8741 (505) 334-6178

BOX 2088 SANTA FE, NEW MEXICO 87501
DATE 2-17-83
RE: Proposed MC
Gentlemen:
I have examined the application dated $2 - 16 - 93$
for the Hiven Devel Co CRU # 54 E-5-25N-121  Operator Lease and Well No. Unit, S-T-R
Operator Lease and Well No. Unit, S-T-R
and my recommendations are as follows:
Approve, with a pressure limit to 960 psi, unless a step rate test is van to validate a higher injection
pressure.
Yours truly,
Jeff a. Solmista

APPLTCA	ATION FOR AUTHORIZATION TO INJECT	
1.	Purpose: Secondary Recovery Pressure Maintenance Disposal Application qualifies for administrative approval? Yes no	Storage
11.	Operator: Hixon Development Company	
	Address: P.O. Box 2810, Farmington, New Mexico 87499	
-	Contact party: Aldrich L. Kuchera Phone: (505) 32546984	
111.	Well data: Complete the data required on the reverse side of this form for each proposed for injection. Additional sheets may be attached if necessity.	th well
IV.	Is this an expansion of an existing project?  xx yes  no  no  no  no  no  no  no  no  no  n	·
٧.	Attach a map that identifies all wells and leases within two miles of any proposinjection well with a one-half mile radius circle drawn around each proposed in well. This circle identifies the well's area of review.	sed jection
VI.	Attach a tabulation of data on all wells of public record within the area of repenetrate the proposed injection zone. Such data shall include a description owell's type, construction, date drilled, location, depth, record of completion, a schematic of any plugged well illustrating all plugging detail.	f each
VII.	Attach data on the proposed operation, including:	
	<ol> <li>Proposed average and maximum daily rate and volume of fluids to be injeen.</li> <li>Whether the system is open or closed;</li> <li>Proposed average and maximum injection pressure;</li> <li>Sources and an appropriate analysis of injection fluid and compatibility the receiving formation if other than reinjected produced water; and If injection is for disposal purposes into a zone not productive of oil at or within one mile of the proposed well, attach a chemical analysis the disposal zone formation water (may be measured or inferred from eliterature, studies, nearby wells, etc.).</li> </ol>	y with or gas s of
VIII.	Attach appropriate geological data on the injection zone including appropriate detail, geological name, thickness, and depth. Give the geologic name, and depth bottom of all underground sources of drinking water (aquifers containing waters total dissolved solids concentrations of 10,000 mg/l or less or resignificant and injection zone as well as any such source known to be immediately underlying it injection interval.	th to ** with
IX.	Describe the proposed stimulation program, if any. FEB 161983	
х.	Attach appropriate logging and test data on the well. (If we block by with the Division they need not be resubmitted.)	-
XI.	Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showil location of wells and dates samples were taken.	.ng `
XII.	Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faor any other hydrologic connection between the disposal zone and any underground source of drinking water.	
(111.	Applicants must complete the "Proof of Notice" section on the reverse side of th	is form.
XIV.	Certification	
	I hereby certify that the information submitted with this application is true an to the best of my knowledge and belief.	d correct
	Name: Andrich L. Kuchera Title Executive Vice Presid	ent
	Signature Oldung Keedled Date: December 20, 1982	
submi	e information required under Sections VI, VIII, X, and XI above has been previous tted, it need not be duplicated and resubmitted. Please show the date and circum e earlier submittal. Please find attached supplimental information	
UI Th	Please find attached supplimental information	

#### III. WELL DATA

A. The following well data must be submitted for each injection well covered by this application.

The data must be both in tabular and schematic form and shall include:

- tease name; Well No.; location by Section, Township, and Range; and footage location within the section.
- (2) Each casing string used with its size, setting depth, sacks of cement used, hole size, top of cement, and how such top was determined.
- (3) A description of the tubing to be used including its size, lining material, and setting depth.
- (4) The name, model, and setting depth of the packer used or a description of any other seal system or assembly used.

Division District offices have supplies of Well Data Sheets which may be used or which may be used as models for this purpose. Applicants for several identical wells may submit a "typical data sheet" rather than submitting the data for each well.

- B. The following must be submitted for each injection well covered by this application. All items must be addressed for the initial well. Responses for additional wells need be shown only when different. Information shown on schematics need not be repeated.
  - (1) The name of the injection formation and, if applicable, the field or pool name.
  - (2) The injection interval and whether it is perforated or open-hole.
  - (3) State if the well was drilled for injection or, if not, the original purpose of the well.
  - (4) Give the depths of any other perforated intervals and detail on the sacks of cement or bridge plugs used to seal off such perforations.
  - (5) Give the depth to and name of the next higher and next lower oil or gas zone in the area of the well, if any.

#### XIV. PROOF OF NOTICE

All applicants must furnish proof that a copy of the application has been furnished, by certified or registered mail, to the owner of the surface of the land on which the well is to be located and to each leasehold operator within one-half mile of the well location.

Where an application is subject to administrative approval, a proof of publication must be submitted. Such proof shall consist of a copy of the legal advertisement which was published in the county in which the well is located. The contents of such advertisement must include:

- (1) The name, address, phone number, and contact party for the applicant;
- (2) the intended purpose of the injection well; with the exact location of single wells or the section, township, and range location of multiple wells:
- (3) the formation name and depth with expected maximum injection rates and pressures; and
- (4) a notation that interested parties must file objections or requests for hearing with the Oil-Conservation Division, P. D. Box 2088, Santa Fe, New Mexico 87501 within 15 days.

NO ACTION WILL BE TAKEN ON THE APPLICATION UNTIL PROPER PROOF OF NOTICE HAS BEEN SUBMITTED.

NOTICE: Surface owners or offset operators must file any objections or requests for hearing of administrative applications within 15 days from the date this application was mailed to them.

#### HIXON DEVELOPMENT COMPANY APPLICATION FOR AUTHORIZATION TO INJECT FORM C-108 SUPPLIMENTAL INFORMATION

CENTRAL BISTI UNIT WELL NO. 54 SW/4 NW/4, SECTION 5, T25N, R12W SAN JUAN COUNTY, NEW MEXICO, NMPM

- I. Shown on application.
- II. Shown on application.
- III. Tabular and schematic Wellbore data are attached.
- IV. This well is located in a Federal and State approved water flood project operational since 1959.
- V. Area of review is shown on attached map.
- VI. Information for well's located in the area of review are attached as follows:

Central Bisti Unit Well No. C-3 (C-2)

Central Bisti Unit Well No. 7

Central Bisti Unit Well No. 8

Central Bisti Unit Well No. 54

Central Bisti Unit Well No. 66

Central Bisti Unit Well No. 67

Central Bisti Unit Well No. 76


Central Bisti Unit Well No. 79

- VII. 1. Proposed average injection rate is  $600~\mathrm{BWPD}$  expected maximum injection rate  $1200~\mathrm{BWPD}$ .
  - 2. The injection system will be closed.
  - 3. Average injection pressures are expected to be in the 1000-1200 psi range. Maximum injection pressure will be 1500 psi.
  - 4. Refer to the attached water analysis report. Since the formation water to be encountered is primarily previously injected water no problems are expected in mixing the two waters.
  - 5. This well is part of an extensive waterflood project active in the Central Bisti Unit since 1959. All produced water is re-injected into the oil productive Lower Gallup sand to maintain pressure. Injection into the Lower Gallup Sand is for water flooding not disposal.
- VIII. The injection zone is the upper bench of the Lower Gallup sandstone. This zone is shown to be 27' in thickness with a

Hixon Development Company Application for Authorization to Inject Page 2

top of 4802' KBE as shown on SP log previously submitted. No known sources of underground drinking water exist in this area. Water well drilling in the area has shown the Ojo Alamo to be dry.

- IX. The well will be acidized as required to maintain injection rate and pressure.
- X. Logs were previously submitted.
- XI. No known sources of drinking water exist in this area.
- XII. This well is part of the existing approved waterflood operation for the Central Bisti Lower Gallup Sand Unit, it is not a disposal well.
- XIII. Proof of Notification attached.
- XIV. Certification shown on Application.

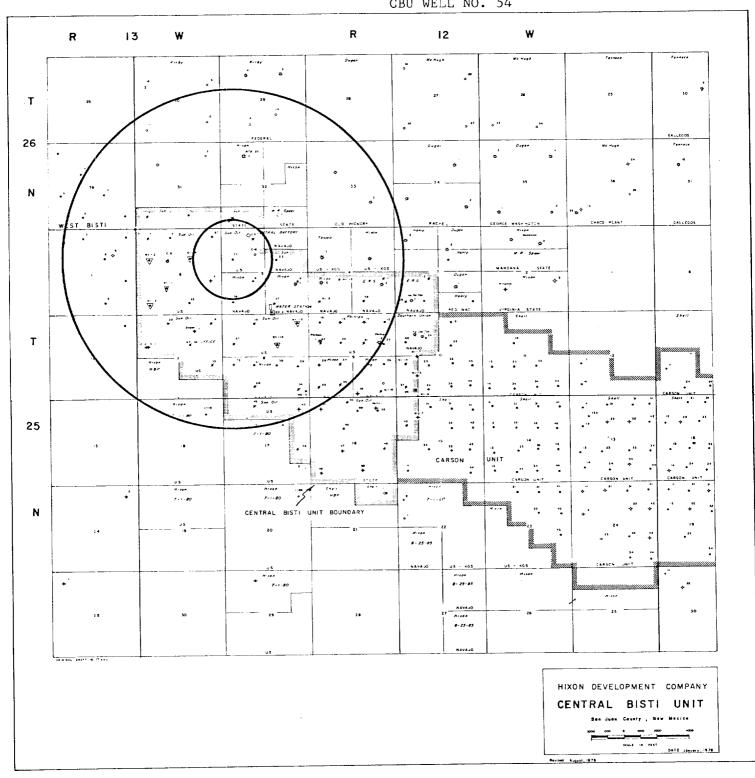

## san juan resurg lave sivey, ....

907 WEST APACHE

P.O. BOX 2079

FARMINGTON, NEW MEXICO

PHONE 327-4966

Report to \_\_\_\_\_\_\_ Hixon Development Company

Requested by \_\_\_\_\_ A. Kuchera, Mgr. \_\_\_\_\_ Sompled by \_\_\_\_ Hixon Personnel

Project \_\_\_\_\_\_ CBU #5 \_\_\_\_ Location NW NW Sec. 6, T25N, R12W

Source of Material \_\_\_\_ Lower Gallup Produced Water

Lab No. \_\_\_\_\_ 24509 Water Analysis for Petroleum Engineering

TEST RESULTS

# WATER ANALYSIS FOR PETROLEUM ENGINEERING

Constituents

Constituent Total Solids pH Resistivity Conductivity	2263 ppm 7.25 2.94 ohms/meter @70°F 3,400 micromhos/cm @ 70°F	Cations Sodium Calcium Magnesium Iron Barium	Meg/L 29.3 2.3 0.5 neg. 0	ppm 674 45 6 3
Comments  Essentially this sulfate solution	s is a 0.2% sodium n.	Anions Chloride Bicarbonate Carbonate Hydroxide Sulfate	4.1 4.0 0 0 24.0	145 244 0 0 1150


Copies to Hixon Development Co. (3)

P.O. Box 2810

Farmington, New Mexico 87401

-- Na 22096

Certified by:



WELL NAME CBU Well No. 7		
LOCATION 1980' FSL, 660' FEL	SECTION .	6 T 25N R 12W
CURRENT STATUS: Plugged and Abandoned		
		GLE6194'
1.1	i 1	RBM
		DF
SURFACE CASING		
Hole size: 12-1/4"  Casing: 8-5/8" 24# J-55		
Casing set @ 186' with 175 sacks		
		WELL HISTORY
		Spud date:6/19/56
FORMATION TOPS		Original owner:
Fruitland		IP BOPD 411 BWPD
Pictured Cliffs		GOR
Lewis		Completion treatment: 20,000# SOF (1956)
Cliffhouse		70,000# SOF (1963)
Menefee		CURRENT DATA
Point Lookout 3631!		Pumping Unit
Mancos <u>3840'</u> Upper Gallup <u>4687'</u>		Tubing
Lower Gallup 4795!		Pump size
Lower Guildy		Rod string
CEMENT TOP4024' temp_survey		available from operator records.
		•
PERFORATIONS 4812'-28'		
4878'-84'		
4892'-98'		
PBD 4962'		
780		
PRODUCTION CASING		
Hole size: _77/8"		
Casing: 5-1/2" 14# J-55		
Casing set @ 4993' TD 49	995'	san luan repro Form 100-13

WELL NAME _	Federal "C" Well NO	. 5		
LOCATION	660' FNL, 1980' FWL	SECTION _	5 T 25N	R 12W
CURRENT ST	ATUS: Plugged and Ab.	andoned		
			GLE _	6145'
		surface	RBM_	6154'
			DF	
		215'		
SURFACE CASIN	ur.			
Hole size: 12-1	<del></del>			
Casing: 8-5/		763'		
	99' with 175 sacks			
		L, X	WELL HISTORY	
CODMATION TO	ane.	1125 -351	Spud date: 7/5/58	
FORMATION TO	<u> </u>	1177'	r Original owner: IP BOPD _	
	1040'	1210 4 holes	GOR	
		CIBP 1305'	Completion treatment: $\underline{1}$	5,000# SOF
			CURRENT DATA	
	3580'		Pumping Unit	
		1 1	Tubing	
			Pump size	
			Remarks	
CEMENT TOP	3600' temp survey			. Manage of the state of the st
	664' CBL	4586'		
PERFORATIONS	4798'-4806'			
	1210' (squeeze)	220' p	lug spotted over l	ower Gallup
	_1125'=1135'			
		4798 -4806'		
	PBD			
PRODUCTION C	ASING			
Hole size:				
Casing: $5-1/6$				
Casing Set @ _ 43		ID	sar	Juan repro Form 100-13

WELL NAME CBU Well No. 8			
LOCATION1980' FSL, 1980	' FWL	SECTION .	SE SW 5 T 25N R 12W
CURRENT STATUS:			
			GLE6168'
	1.1.	11 1	RBM
			N DIW
			DF
SURFACE CASING  Hole size:  Casing: 10 3/4" 32.75# H-40			
Casing set @ 209'			
			WELL HISTORY
			Spud date:
FORMATION TOPS			Original owner:
Fruitland			P 321 BOPD BWPD
Pictured Cliffs 1118'			GOR
Lewis			Completion treatment: 2-5-57 39 API
Cliffhouse			
Menefee	1 1		CURRENT DATA
Point Lookout			Pumping Unit 320 Lufkin (2-1-80-C320) 246 86)
Mancos 4616'			Tubing
Upper Gallup			Pump size $2\sqrt{2} \times 2\sqrt{2} \times 11 \times 13 \times 16$ THEC
Lower Gallup	<del></del>		Rod string
CEMENTIOP Liner cement	ioh		tbg @ 4814.82' SN @ 4778.87'
ULITERIT TO:			tbg anchor 5 jts above SN
circulated to surfac	ie.		- 3
DEDECIDATIONS / 707 / 010!			10-22-81 Run 4 1/2" 10.23# Atlas
PERFORATIONS 4787-4818' 4855-4864'			Bradford 4LFS flush joint liner
4869-84			to 4661.86' and cement with 125
4 holes/ft	Botto		sacks 50:50 POZ and 125 sacks
4 110163/11	of		class B. Cement circulated to
PBD4886'	liner 4661.		surface.
	KBU		POWERED BY: Ajax 8-1/2" x 10
PRODUCTION CASING			2-1-80 Core analysis - Reservoir
Hole size:			data
Casing: 5 1/2' 14#J-55	1		
Casing set @ 4921'	TD 4944	, 1	san juan repro Form 100-13

.

WELL NAME CBU WELL NO. 54	
LOCATION 1980' FNL, 660' FWL	SECTION5T25NR12W
CURRENT STATUS: Pumping	
	GLE
	RBM_6168'
. []	RBM_0100
	DF
SURFACE CASING	
Hole size: 12-1/4"	
Casing: 8-5/8" 24#	<b>L</b>
Casing set @ <u>192¹ w/ 175 s</u> x	
	WELL HISTORY
	Spud date: <u>6-26-56</u>
FORMATION TOPS	Original owner: <u>Sunray Mid-Continent</u>
Fruitland	IP BWPD BWPD
Pictured Cliffs 1102 *	GORCompletion treatment: 2 stage frac with
Lewis	15,000# and 15,000# 20-40 sand
Cliffhouse	CURRENT DATA
Menefee	Pumping Unit Parkersburg 80D
Mancos	Tubing
Upper Gallup 4676'	Pump size $2 \times 1-1/2 \times 16$
Lower Gallup 4788'	Rod string 189 of 3/4"
	Remarks 2/7/64 pumped mud-csg-leak
CEMENTTOP 3880' (temp survey)	2662' to 2693' (2708')
	Baker BP @ 4780' Squeezed with
DEDECRATIONS.	200 sacks, cleaned out
PERFORATIONS 4810'-22', 4862'-70',	Model D packer drilled and driven to 4893' 12/22/63
4876'-82'	Well fraced with 30,000# sand/oil
	12/2/64.
PBD 4969'	
PRODUCTION CASING	
Hole size:	
Casing: 5-1/2" 14# J-55	5002
Casing set @	5003 san Juan repro Form 100-13

.

WELL NAME CBU WELL NO. 66 (GI-20)	
LOCATION 330' FSL, 330' FWL	SECTION32T26NR12W
CURRENT STATUS: Flowing	
	GLE6149'
1.1	RВМ 6158'
	DF <u>6156'</u> KB 9'
SURFACE CASING	
Hole size:12-1/4"	
Casing: 8-5/8" 24# J-55	-
Casing set @ 146' w/ 150 sx	WELL LICTORY
	WELL HISTORY  Spud date: 12-13-57
FORMATION TOPS	Original owner: Val R. Reese
Fruitland	IP <u>192</u> BOPD BWPD
Pictured Cliffs	GOR
Lewis	Completion treatment: 20,000# sand
Cliffhouse	2200 psi BD CURRENT DATA
MenefeePoint Lookout	Pumping Unit 160 API
Mancos	Tubing
Upper Gallup 4700'	Pump size
Lower Gallup 4807'	Rod string
CEMENT TOP 4000' (est)	Remarks Originally ran 153 jts 2-4.7# rector slip type tubing han
CEMENT TOP 4000' (est)	4-1/2" x 2". Baker Model DA pac
	at 4757'. Last pulling record s
PERFORATIONS 4804'-26', 4864'-68',	149 joints 2-3/8" 4.7# tbg (4736
4874'-84', (4 BPF)	set inside Model D packer - táil
	is type "E" packer seal assembly
PBD 4924'	
PBD 4724	
PRODUCTION CASING	
Hole size:	
Casing: 4-1/2" 9.5# J-55	025!
Casing set @ 4925' w/ 150 sx TD 4	925' san Juan repro Form 100-13

WELL NAME _ CBU WELL NO. 67 (WIW-	10)
	SECTION6T25NR 12W
CURRENT STATUS: Pumping	
	GLE6158'
	RBM_6170'
	DF
SURFACE CASING	
Hole size: 12-1/4"	
Casing: 8-5/8" 24#	
Casing set @ 200' w/ 175 sx	
	WELL HISTORY
FORMATION TOPS	Spud date: 6-13-56 Original owner: Sunray Mid-Continent
***************************************	IP 323 BOPD 0 BWPD
Fruitland	GORBWID
Pictured Cliffs 1161'	Completion treatment: 7/56
Lewis	Completion treatment. 7750
Cliffhouse	CURRENT DATA
Menefee	Pumping Unit Emsco 80D
Mancos	Tubing 2-3/8"
Upper Gallup 4712'	Pump size 2" x 1-1/4" x 12'
Lower Gallup 4815'	Rod string 189 of 3/4"
Covici Guildp	Remarks 5/65 Plugged off 2nd & 3rd
CEMENT TOP 3613' (temp survey)	Lower Gallup.
PERFORATIONS 4816'-32'	
4873'-80'	
4885'-90'	
PBD_4848'	
PRODUCTION CASING	
Hole size:7-7/8"	
Casing: 5-1/2" 14#	J
Casing set @ 4998' w/ 200 sx T	D

.

WELL NAMECBU Well No. 76	
LOCATION 1700' FNL, 660' FEL	SECTION6T25N - R12W
CURRENT STATUS:	
	GLE 6205'
1.1	RBM 13'
	DF
SURFACE CASING	
Hole size: 12-1/4" Casing: 8-5/8" 24# K-55 8rd	
Casing:	L-
Casing set w 217.12 with 150 such	WELL HISTORY
	Soud date:5/19/82
FORMATION TOPS	Original owner: Hixon Development Company
11271	IP BOPD BWPD
FruitlandPictured Cliffs	GOR
Lewis1369'	Completion treatment:
Cliffhouse 1523'	
Menefee 2581'	CURRENT DATA
Point Lookout	Pumping Unit
Mancos 3813'	Tubing
Upper Gallup 4727' 4812'	Pump size
Lower Gallup	Rod string
CEMENT TOP	Remarks
CLINEINTTO	
PERFORATIONS 4829'-4857'	
BBB 5020 081	
PBD5039.08'	
PRODUCTION CASING	
Hole size:	
Casing: 4-1/2" 10.5# K-55 8rd	

Casing set @ 5081.96' w/ 525 sacks TD \_5120'

LOCATION 198	30' FNL, 2100' FWL	SECTION .	5	т _	25N	R _	12W
CURRENT STA	TUS:			······································			
				G	LE	6155 <b>'</b>	
	1.1	1.1		R	BM.		
				Б	r	<del> </del>	
SURFACE CASING	<u> </u>						
Hole size: 12-	1/4"						
Casing: <u>8-5/8"</u>	24# K-55 8rd						
Casing set @216	6' with 135 sx						
			WELL HISTO	RY			
			Spud date:	5/13	8/82		
FORMATION TOP	s		Original owner			)evelo	pment Co
Fruitland	1080'		IP	BO	PD _	В	WPD
Pictured Cliffs	1135'		GOR			<u> </u>	
Lewis	1363'		Completion tro	eatme	ent:		
Cliffhouse	1475'						
Menefe <b>e</b>	2551'		CURRENT DA	ATA			
Point Lookout	3591'		Pumping Unit				
Mancos	3772'		Tubing			<u>-</u>	
Upper Gallup	4682'		Pump size				
Lower Gallup	4769'		Rod string _				
			Remarks				<u>.</u>
CEMENT TOP							<del>-</del>
PERFORATIONS	<u>4784'-4810'</u>						
	PBD 5010'						
			<u></u>				
			<del></del>				
PRODUCTION CA	SING		~	<del></del>			
Hole size:	8"						
Casing: 4-1/2"	10.5# K-55 8rd						
		50601			san j	uan repro	Form 100-13

#### NOTICE

HIXON DEVELOPMENT COMPANY, P.O. Box 2810, Farmington, New Mexico 87499, (505) 325-6984, whoes agent is Aldrich L. Kuchera hereby notifies interested parties that the CBU Well No. 1, 5 and 54 located in the SW/4 SW/4 Section 31, T26N, R12W, NW/4 NW/4 Section 6 and SW/4 NW/4 Section 5, T25N, R12W respectively are to be converted to water injection wells. Maximum rate will be 1200 BWPD at less than 1500 psi. Any request or objection should be filed with Oil Conservation Division, P.O. Box 2038, Santa Fe, New Mexico 87501 within 15 days.

LEGAL NOTICE NUMBER 12755 TO BE PUBLISHED 2/16/83