

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
SUNDRY NOTICES AND REPORTS ON WELLS

FORM APPROVED
OMB No. 1004-0135
Expires July 31, 1996

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
NMSF-078056

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
Central Bisti Unit WI 5

9. API Well No.
30-045-05576

10. Field and Pool, or Exploratory Area
Bisti Lower Gallup

11. County or Parish, State
San Juan, New Mexico

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
Elm Ridge Resources, Inc.

3a. Address
PO Box 189 Farmington, NM 87499

3b. Phone No. (include area code)
505-632-3476


4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
**660' FNL & 660' FWL
Sec. 6-T25N-R12W**

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize <input type="checkbox"/> Deepen <input type="checkbox"/> Production (Start/Resume) <input type="checkbox"/> Water Shut-Off <input type="checkbox"/> Subsequent Report <input type="checkbox"/> Alter Casing <input type="checkbox"/> Fracture Treat <input type="checkbox"/> Reclamation <input type="checkbox"/> Well Integrity <input type="checkbox"/> Final Abandonment Notice <input type="checkbox"/> Casing Repair <input type="checkbox"/> New Construction <input type="checkbox"/> Recomplete <input type="checkbox"/> Other _____ <input type="checkbox"/> Convert to Injection <input checked="" type="checkbox"/> Plug and Abandon <input type="checkbox"/> Temporarily Abandon <input type="checkbox"/> Water Disposal

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once Testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Elm Ridge Resources, Inc. plans to plug and abandon the Central Bisti Unit WI #5 by the end of summer 2001 per the approved procedure already filed and attached for your review.



2001 MAY 17 PM 2:13

14. I hereby certify that the foregoing is true and correct.

Name (Printed/Typed) Trudy Grubelnik	Title Production Technician
Signature <i>Trudy Grubelnik</i>	Date May 15, 2001

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant has legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

ACCEPTED FOR RECORD

Title 18 U.S.C. Section 1601, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED
MAR 27 2000
FARMINGTON

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir,
Use "APPLICATION FOR PERMIT--" for such proposals

SUBMIT IN TRIPPLICATE

5. Lease Designation and Serial No.
SF 078056

6. If Indian, Allottee or Tribe Name

7. If Unit or CA. Agreement Designation
Central Bisti Unit

8. Well Name and No.
Central Bisti Unit No. WI 5

9. API Well No.
30-045-05576

10. Field and Pool, or Exploratory Area
Bisti Lower Gallup

11. County or Parish, State
San Juan, New Mexico

1. Type of Well
 Oil Well Gas Well Other WIW

2. Name of Operator
Central Resources, Inc.

3. Address and Telephone No.
P.O. Box 1247, Bloomfield, New Mexico 87413 (505)-632-3476

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
660' FNL, 660' FWL, Sec 6, T25N, R12W

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Intent	<input checked="" type="checkbox"/> Abandonment
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Plugging Back
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Altering Casing
	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change of Plans
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Central Resources, Inc. intends to plug the well in accordance with regulations. Injection equipment will be removed and the well will be plugged as specified. Perforate and squeeze will be used unless casing can be recovered over the specified interval.

SEE ATTACHED FOR

Proposed procedure:

CONDITIONS OF APPROVAL

- Notify the Farmington BLM office at 505-599-8907 24 hours prior to commencement of plugging operations.
- Spot a cement plug through tubing from 4600' - 4718' to cover Gallup top @ 4718' ^{4671'}
- Perforate and squeeze cement from 1930' - 2065' to cover the Mesaverde top @ 2065' inside and outside the casing.
- Perforate and squeeze cement from 1100' - 1200' to cover the Pictured Cliffs top @ 1200' inside and outside the casing.
- Perforate and squeeze cement from 750' - 870' to cover the Frutiland top @ 870' inside and outside the casing.
- Perforate and squeeze cement from 175' - 250' to cover the surface casing shoe inside and outside the production casing.
- Perforate and squeeze cement from surface to 50' inside and outside the production casing.
- Cut wellhead and install dry hole marker. Clear and remediate location.

14. I hereby certify that the foregoing is true and correct

Signed Rodney L. Seale Title District Manager Date February 14, 2000

(This space for Federal or State office use)
Approved by William Beaman Title PTT Team Lead Date 3/23/00
Conditions of approval, if any: ACTING

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any manner within its jurisdiction.

* See Instruction on Reverse Side

Central Bisti Unit No. 5WI

Review Date: November 22, 1999

Elevation: 6184'GL, 6196'KB


Location: 660' FNL, 660' FWL, Sec 6, 25-N, 12-W, San Juan County, New Mexico

Field: Bisti Lower Gallup

Zone: Lower Gallup

Perfs: 4828'-4856'

Spud Date: April 7, 1956, 4:00 PM

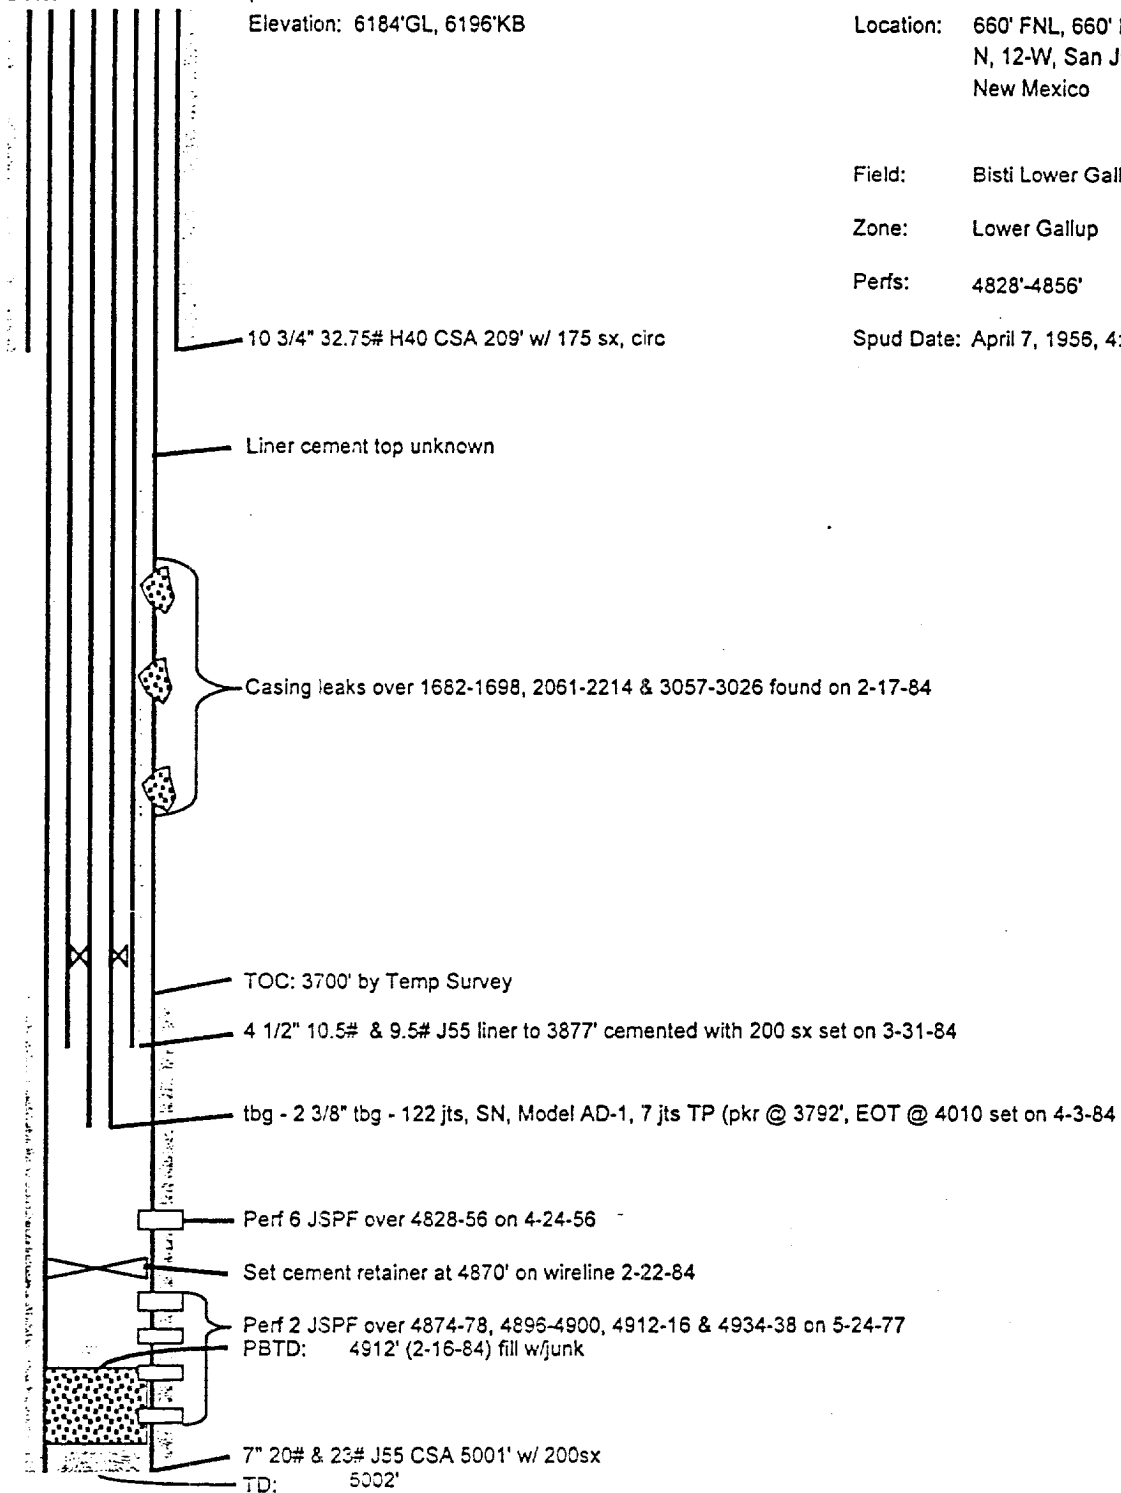

Workovers:

- 6-9-56 Frac 4828-56 w/ 30,000 gal oil & 30,000 20/40 sand at 16 BPM
- 5-24-77 Perf 2 JSPF over 4874-78, 4896-4900, 4912-16 & 4934-38
- 5-25-77 Acidize 4828-4938 w/ 1,500 Gal 15% HCl @ 1/2 BPM
- 2-16-84 Clean out fill to junk at 4912'
- 2-22-84 Wireline set cement retainer at 4870'
- 3-31-84 Set 4 1/2" liner from surface to 3877' w/ 200 sx cement
- 10-20-85 Passed MIT
- 6-11-89 Failed MIT & Shut in
 Flowline may not be sound, injection may not be worthwhile

[Handwritten Signature]
 Red Seal, Printed on 2/1/80

BLM CONDITIONS OF APPROVAL

The following surface rehabilitation Conditions of Approval must be complied with as applicable, before this well can be approved for final abandonment (see 43 CFR 3162.3-4). Surface rehabilitation work shall be completed within one year of the actual plugging date. Notification for completion of this work can be submitted with a Sundry Notice.

1. All fences, production equipment, purchaser's equipment, concrete slabs, deadman (anchors), flowlines, risers, debris and trash must be removed from the location.
2. Production pits will be closed according to the Unlined Surface Impoundment Closure Guidelines, as approved in the Environmental Assessment of December 1993. Any oil stained soils may be remediated on-site according to these guidelines or disposed of in an approved disposal facility.
3. The well pad will be shaped to the natural terrain and left as rough as possible. All compacted areas and areas devoid of vegetation shall be ripped to a minimum of 12" before seeding.
4. Access roads will be shaped to conform to the natural terrain and left as rough as possible to detour vehicular travel. Access will be ripped to a minimum of 12" in depth and waterbarred prior to seeding. All erosion problems created by the development must be corrected prior to acceptance of release. Waterbars should be spaced as shown below:

% Slopes	Spacing Interval
Less than 20%	200'
2 to 5%	150'
6 to 9%	100'
10 to 15%	50'
Greater than 15%	30'

All water bars should divert to the downhill side of the road.

5. All disturbed areas will be seeded with the prescribed certified seed mix (reseeding may be required).
6. Notify Surfacing Managing Agency seven (7) days prior to seeding so that they may be present for that option.
7. The period of liability under the bond of record will not be terminated until the lease is inspected and the surface rehabilitation approved.

Other SMA's may vary slightly in their restoration requirements. It is your responsibility, as the operator, to obtain surface restoration requirements from other SMA's. We need to be provided with a copy of these requirements. Any problems concerning stipulations received from other SMA's should be brought to us.

On private land, we should be provided with a letter from the fee owner stating that the surface restoration is satisfactory.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
FARMINGTON FIELD OFFICE
1235 LA PLATA HIGHWAY
FARMINGTON, NEW MEXICO 87401

Attachment to notice of

Re: Permanent Abandonment

Intention to Abandon:

Well: WI-5 Central Bisti Unit

CONDITIONS OF APPROVAL

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Lease."

2. Mike Flanikan with the Farmington Office is to be notified at least 24 hours before the plugging operations commence (505) 599-8907.

3. The following modifications to your plugging program are to be made:

- a) Place a cement plug from 3927' - 3827' to cover the 4 ½" casing shoe.
- b) Place the Mesaverde plug from 2000' - 1900' inside the 4 ½" casing and outside the 7" casing.
- c) Place the Pictured Cliffs plug from 1250' - 1150' inside the 4 ½" casing and outside the 7" casing.
- d) Place the Fruitland plug from 937' - 837' inside the 4 ½" casing and outside the 7" casing.
- e) Combine the surface casing shoe plug and the surface plug from 259' to surface to cover the Ojo Alamo inside the 4 ½" casing and outside the 7" casing.

You are also required to place cement excesses per 4.4 of the attached General Requirements.

Office Hours: 7:45 a.m. to 4:30 p.m.

GENERAL REQUIREMENTS FOR
PERMANENT ABANDONMENT OF WELLS ON FEDERAL AND INDIAN LEASES
FARMINGTON DISTRICT OFFICE

- 1.0 The approved plugging plans may contain variances from the following minimum general requirements.
- 1.1 Modification of the approved plugging procedure is allowed only with the prior approval of the Farmington District office, Branch of Drilling & Production.
- 1.2 Requirements may be added to address specific well conditions.
- 2.0 Materials used must be accurately measured.
- 3.0 A tank or approved pit must be used for containment of any fluids from the wellbore during plugging operations and all unattended pits are to be fenced with woven wire. These pits will be fenced on three sides and once the rig leaves location, the fourth side will be fenced.
- 3.1 Pits are not to be used for disposal of any constituent(s) of concern.
- 4.0 All cement plugs are to be placed through a work string. Cement may be bull-headed down the casing with prior approval. Cement caps on top of bridge plugs or cement retainers may be placed by dump bailer.
- 4.1 The cement shall be as specified in the approved plugging plan.
- 4.2 All cement plugs placed inside casing shall have sufficient volume to fill a minimum of 100' of the casing, or annular void(s) between casings, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.
- 4.3 Surface plugs may be no less than 50' in length.
- 4.4 All cement plugs placed to fill annular void(s) between casing and the formation shall be of sufficient volume to fill a minimum of 100' of the annular space plus 100% excess, calculated using the bit size, or 100' of annular capacity, determined from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.
- 4.5 All cement plugs placed to fill an open hole shall be of sufficient volume to fill a minimum of 100' of hole, as calculated from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug. In the absence of a caliper log, an excess of 100% shall be required.
- 5.0 All cement plugs spotted across, or above, any exposed zone(s), when; the wellbore is not full of fluid or the fluid level will not remain static, and in the case of lost circulation or partial returns during cement placement, shall be tested by: (1) tagging with the work string, or: (2) for cased holes only; pressuring to a minimum surface pressure of 500 PSI, with no more than a 10% drop during a 15-minute period.
- 5.1 The top of any cement plug verified by tagging must be at or above the depth specified in the approved plan, without regard to any excess.

5.2 Testing will not be required for any cement plug that is mechanically contained by use of a bridge plug and/or cement retainer.

5.3 Any cement plug which is the only isolating medium, for a fresh water interval or a zone containing a prospectively valuable deposit of minerals, shall be tested by tagging.

6.0 All wells are to be controlled by means of a wellbore fluid that is to be of a weight and consistency necessary to stabilize the wellbore. Wellbore fluid shall be left in place as filler between all plugs.

6.1 Drilling mud may be used as the wellbore fluid in open hole plugging operations.

6.2 The wellbore fluid used in cased holes shall be of sufficient weight to balance known pore pressures in all exposed formations.

7.0 A blowout preventer and related equipment (BOP) shall be installed and tested prior to working in a wellbore with any exposed zone(s); (1) that are over pressured, (2) where the pressures are unknown, or (3) known to contain H₂S.

8.0 Within 30 days after plugging work is completed, file a Sundry Notice, Subsequent Report of Abandonment (Form 3160-5), five copies, with the District Manager, Bureau of Land Management, 1235 La Plata Highway, Farmington, NM 87401. The report should show the manner in which the plugging work was carried out, the extent, by depth(s), of cement plugs placed, and the size and location, by depth(s), of casing left in the well. Show date well was plugged.

9.0 All permanently abandoned wells are to be marked with a permanent monument as specified in 43 CFR 3162.6(d). Unless otherwise approved.

All of the above are minimum requirements. Failure to comply with the above conditions of approval may result in an assessment for noncompliance and/or a Shut-in Order being issued pursuant to 43 CFR 3163.1. You are further advised that any instructions, orders or decisions issued by the Bureau of Land Management are subject to administrative review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4 and 43 CFR 4.700.