


BOP REQUIREMENTS FOR
LOW PRESSURE WELLS

Test

After nipping up on surface pipe, and before drilling out the cement plug, all BOP equipment shall be tested to a minimum of 1000 psi.

Frequency

The BOP's shall be cycled on every trip.

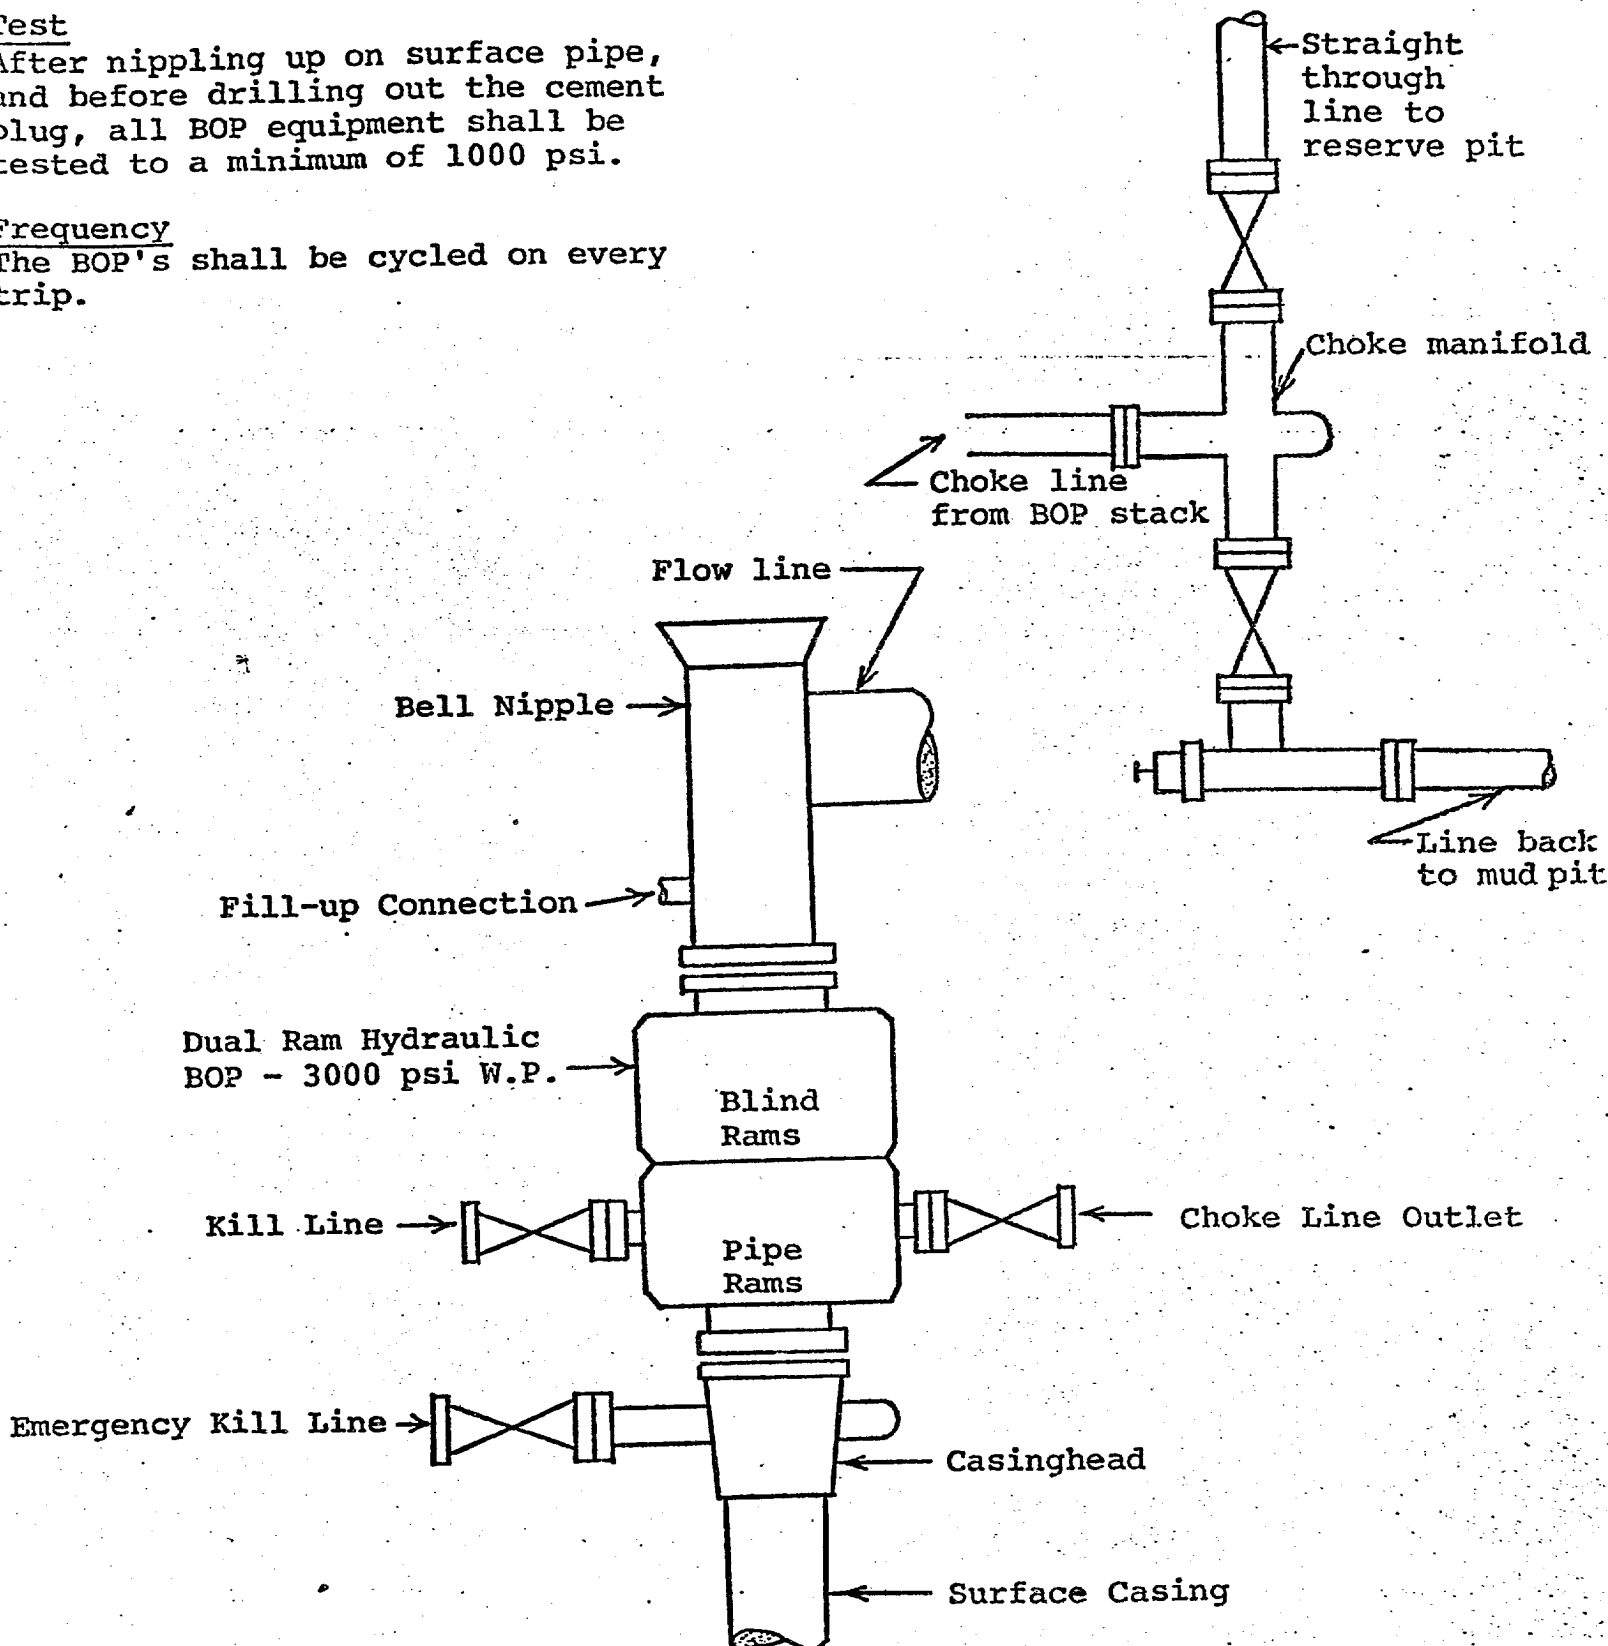

Schematic Drawing
3000 psi - BOP Equipment