

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

5. Lease Designation and Serial No.

LC028784C

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

NMNM 8852SX

8. Well Name and No.

Burch Keely Unit #207

9. API Well No.

30-105-03137

10. Field and Pool, or Exploratory Area

Grbg Jackson SR Q Grbg SA

11. County or Parish, State

Eddy Co., New Mexico

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator
Marbob Energy Corporation

3. Address and Telephone No.
P.O. Drawer 217 Artesia, New Mexico 88210 (505)748-3303

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

660 FSL 1980 FWL, Sec. 26 T-17-S R-29-E Unit N

2. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☒ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other _____
- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

3. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

- 1) Spot cement plug from bottom perforation 3376' to top perforation 2412' and 50' above and tag
- 2) Load hole W/mud
- 3) Perforate 7" casing at base of salt 875' squeeze W/50 sacks of cement W.O.C. tag
- 4) Perforate 7" casing at top of salt on 8 5/8 shoe 465' squeeze W/50 sacks of cement W.O.C. Tag
- 5) Perforate 7" casing at 50' circulate cement to surface

4. I hereby certify that the foregoing is true and correct

Signed Raymond M. Alvarado Title Supervisor

Date 10-28-94

(This space for Federal or State office use)

Approved by _____
Conditions of approval, if any:

Title _____

Date _____

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side

- : Marbab Energy Pay water
Before
Switch Roady unit # 207

8 5/8 415' cemented w/ 75 sacs


Packerations
2412' - 2844

7" 2876' cemented w/ 100 sacs

Packerations 3376 - 3049
4 1/2 liner cemented w/ 125 sacs
3413'

Marathon Energy Corporation

After
Buick Kelly Unit # 207

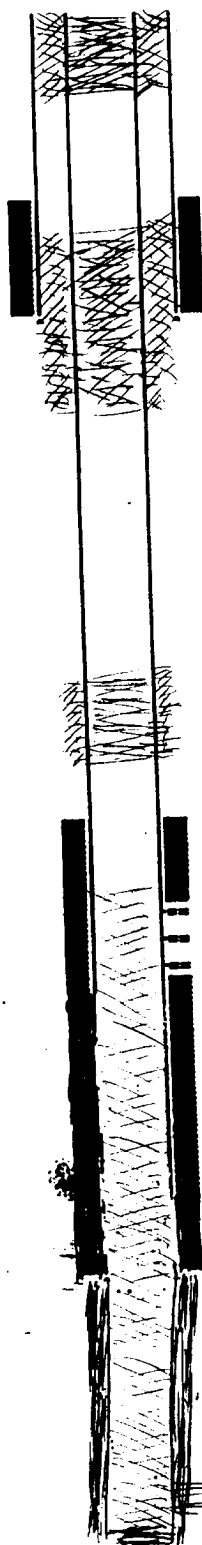

Perforate 7" casing of 50'
Circulate cement to surface

8 7/8 415' Cemented w/ 75 sacks

Perforate 8 7/8 w/ 50 sacks
Top of salt at 8 7/8

Perforate 8 7/8 w/ 50 sacks
Base of salt 875'

Perforations 2412' - 2844'

7" 2876' Cemented w/ 100 sacks

Perforations 3376' - 3049'

4 1/2 liner 3413' cemented w/ 125 sacks