

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPLICATE*
(Other instructions on re-
verse side)Form approved.
Budget Bureau No. 42-R1424.
5. LEASE DESIGNATION AND SERIAL NO.

SF-078056

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT-" for such proposals.)

1. <input type="checkbox"/> OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER		7. UNIT AGREEMENT NAME
2. NAME OF OPERATOR Hixon Development Company		8. FARM OR LEASE NAME Federal "C"
3. ADDRESS OF OPERATOR P.O. Box 2810, Farmington, New Mexico 87401		9. WELL NO. 9
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface 1750' FNL, 1850' FWL, Section 5, T25N, R12W		10. FIELD AND POOL, OR WILDCAT WAW-Fruitland-PC
14. PERMIT NO.		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Section 5, 25N, R12W
15. ELEVATIONS (Show whether DF, RT, GR, etc.) GLE-6159'		12. COUNTY OR PARISH San Juan
		13. STATE NM

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL



ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

10-25-79: TD-1330'. Prepare to P&A. Picked up drill pipe and tripped to 1250'. Riggged up Dowell. Spotted cement plugs as follows: 1250'-1000' (250') with 30 sacks; 800'-600' (200') with 25 sacks; 200'-10' (190') with 30 sacks. Rig down Morrow Drilling. Well P&A'd as a non-commercial WAW-Fruitland-PC extension test. Well report complete.

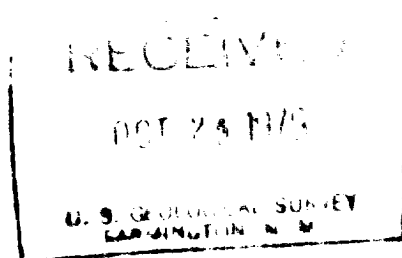

18. I hereby certify that the foregoing is true and correct

SIGNED

Petroleum Engineer

DATE 10-26-79

(This space for Federal signature)

APPROVED

APPROVED BY

TITLE

CONDITIONS OF APPROVAL MAR 23 1982

For JAMES F. SIMS

DISTRICT ENGINEER

See Instructions on Reverse Side

RECEIVED FOR RECORD

DEC 13 '79

FARMINGTON DISTRICT
BY