

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

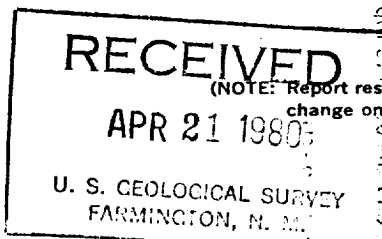
(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other ☐2. NAME OF OPERATOR
Jerome P. McHugh3. ADDRESS OF OPERATOR
Box 208, Farmington, NM 874014. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1850' FSL - 1520' FWL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) Frac and tbq☐
☐
☐
☐
☐
☐
☐
☐
☐5. LEASE
N00-C-14-20-5200
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
Navajo
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
Colket
9. WELL NO.
#1E
10. FIELD OR WILDCAT NAME
Basin Dakota
11. SEC., T., R., M. OR BLK. AND SURVEY OR AREA
Sec 15 T25N R11W
12. COUNTY OR PARISH
San Juan
13. STATE
NM
14. API NO.
15. ELEVATIONS (SHOW DE KOB, AND WD)
6371' GL

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

4-16-80

Rigged up Western Co. and fraced as follows: 15,000 gal Mini Max III 30 Pad

10,000 gal Mini Max III 30 w/1#/gal 20-40 sand

10,000 gal Mini Max III 30 w/2#/gal 20-40 sand

10,000 gal " " " w/3#/gal 20-40 sand

10,000 gal " " " w/4#/gal 20-40 sand

5,000 gal " " " w/4#/gal 10-20 sand

3,864 gal flush. All fluid had 1 gal aquaflo per 1000 gal and 1/2 gal adocide

w/2% hydrocarbon phase. Braker added as follows: 15,000 @ 1/2# B-5, 15,000

3/4# B-5, 15,000 @ 1/2# B-5 plus 1/2# B-11, 15,000 @ 3/4# B-5 plus 3/4# B-11.

Total 100,000# 20-40 sand, 20,000# 10-20 sand. Max pressure 3400 psi and 36 B/M

Avg pressure 2800 psi and 35 B/M, Min pressure 2700 psi and 25 B/M. ISDP 1950 psi

SI 1750 after 15 min.

Ran 179 jts 1-1/2" 2.9# EUE tbq set @ 5790' KB.

Subsurface Safety Valve: Manu. and Type

18. I hereby certify that the foregoing is true and correct

SIGNED Thomas A. Dugan TITLE Agent DATE 1980

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

NMOCC