

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUBMIT IN TRIPPLICATE\*  
(Other instructions on re-  
verse side)

Form approved.  
Budget Bureau No. 42-R1424

5. LEASE DESIGNATION AND SERIAL NO.

14-20-603-1424

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL  GAS WELL  OTHER

7. UNIT AGREEMENT NAME

2. NAME OF OPERATOR  
Hixon Development Company

8. FARM OR LEASE NAME

In Ni Da Pah

3. ADDRESS OF OPERATOR  
P.O. Box 2810, Farmington, New Mexico 87401

9. WELL NO.

1-R

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.\*  
See also space 17 below.)  
At surface

10. FIELD AND POOL, OR WILDCAT

Pictured Cliffs

1850' FSL, 200' FEL, Section 4, T25N, R12W

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Section 4, T25N, R12W

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

6183' GLE

12. COUNTY OR PARISH

San Juan

13. STATE

NM

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

WATER SHUT-OFF

REPAIRING WELL

FRACTURE TREAT

MULTIPLE COMPLETE

FRACTURE TREATMENT

ALTERING CASING

SHOOT OR ACIDIZE

ABANDON\*

SHOOTING OR ACIDIZING

ABANDONMENT\*

REPAIR WELL

CHANGE PLANS

(Other)


Drilling Progress

(Other)

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Move rotary tools on location. Rig up and dig mud pits. Spud well at 3:30 pm 7-18-80. Drill 9-7/8" hole to 82'. Pick up and run 79.05' 7" 20# 8rd casing to 80.38' GLE. Cemented surface casing with 50 sacks Class "B" cement with 2% CaCl. Cement circulated to surface. Displace cement with 3 BW. Shut well in. WOC.

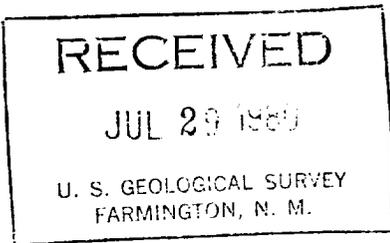

18. I hereby certify that the foregoing is true and correct

SIGNATURE *Robert Terrey* TITLE Petroleum Engineer

DATE July 25, 1980

ACCEPTED FOR RECORD

(This space for Federal or State office use)

APPROVED BY Aug 4 1980

TITLE \_\_\_\_\_

DATE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY:

FARMINGTON DISTRICT

BY *Bh*

\*See Instructions on Reverse Side

11MOCC