

N. O. O. C. COWY
(SUBMIT IN TRIPLICATE)


Budget Bureau No. 42-R358.4.
Form Approved.

Land Office Los Cruces

Lease No. 058579 065374-A

Unit t

Copy 57

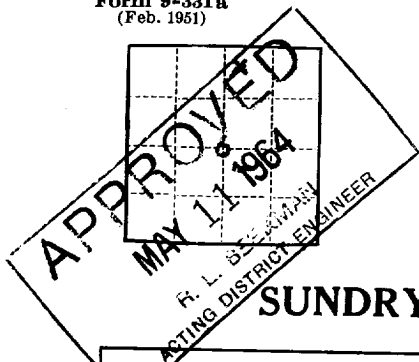

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY
NOTICE OF INTENTION TO ABANDON WELL	<u>Report of Clean Out</u>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

May 1, 1964

Well No. B-3 is located 660 ft. from N line and 1950 ft. from E line of sec. 6

NW/4 NE/4 Sec. 6
(¼ Sec. and Sec. No.)

18S
(Twp.)

29E
(Range)

NMPM
(Meridian)

Loco Hills
(Field)

Eddy
(County or Subdivision)

New Mexico
(State or Territory)

RECEIVED
MAY 10 1964

The elevation of the derrick floor above sea level is 3623 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

In accordance with our conversation with Mr. James Knauf of your Artesia office on April 21, we have cleaned out the Miller "B" No. 3 to a total depth of 2710' and logged the well with a sonic log, Gamma-Ray. The well was then fraced with Lynes formation packers set at 2467' and 2562'. The Premier zone was fraced below the bottom packer with 9,500 gallons of slick water and 17,000# of sand. Because communication was indicated the packers were then moved to where the lower packer was reset at 2442' and both zones treated with 12,500 gallons of slick water and 29,000# of sand. After pulling the packers the well was placed on production.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company J. Cleo Thompson

Address 1203 Kirby Bldg.

Dallas 1, Texas

By Frank Warden
Title Petroleum Engineer

RECEIVED
MAY 8 1964
U.S. GEOLOGICAL SURVEY
ALBUQUERQUE, NEW MEXICO