


WEK DRILLING CO., INC. - Rig 1 & 3
BLOWOUT PREVENTER SPECIFICATION

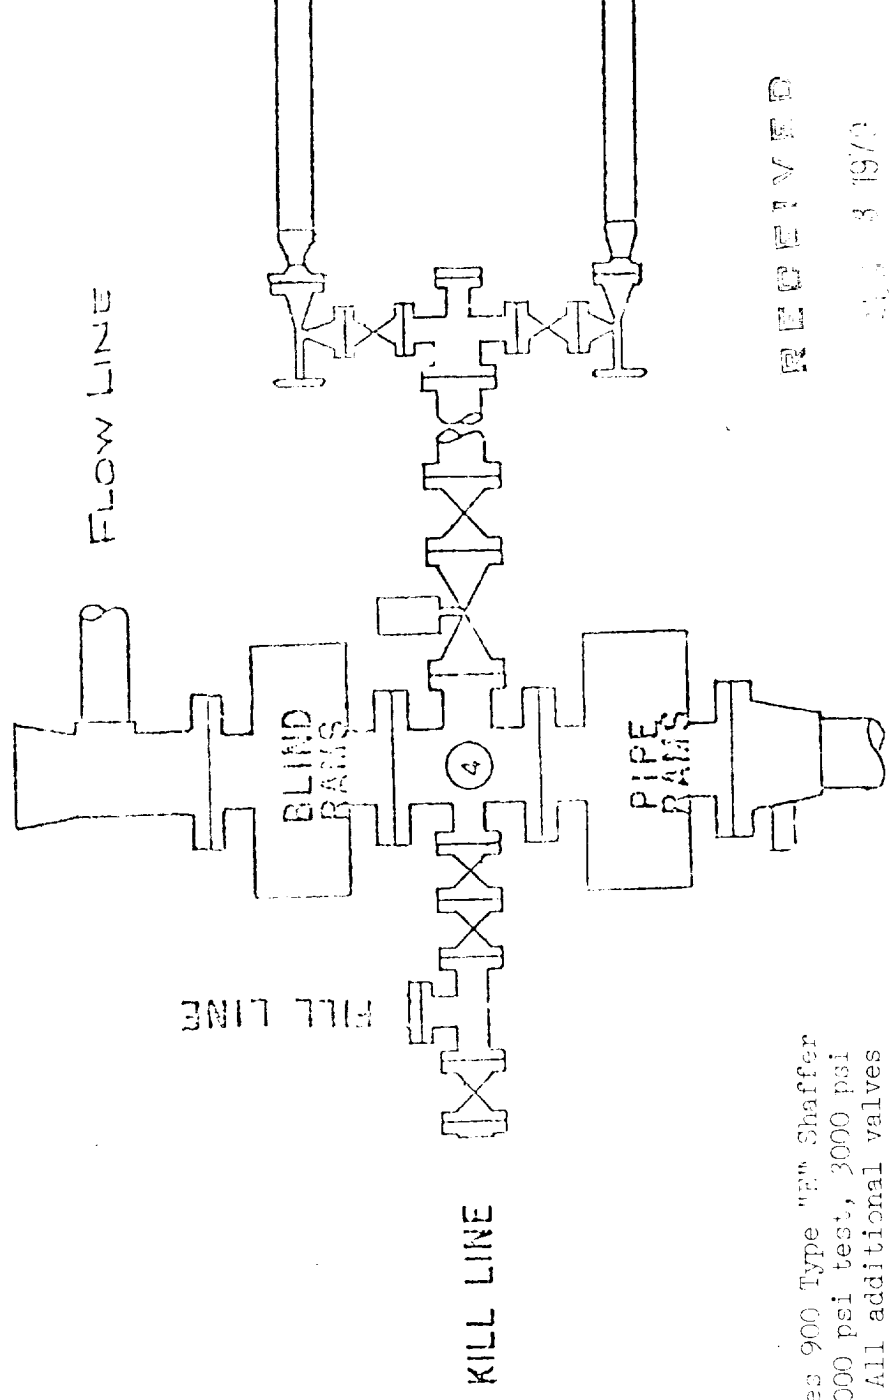

BOP's are 10" Series 900 Type "B" Shaffer
 Double Hydraulic 6000 psi test, 3000 psi
 working pressure. All additional valves
 & connections are the same test & working
 pressures.

RECEIVED

APR 8 1970

W. J. P.
 GENERAL MANAGER