

LEK DRILLING CO., INC. - Rig 1 & 3
BLOWOUT PREVENTER SPECIFICATION

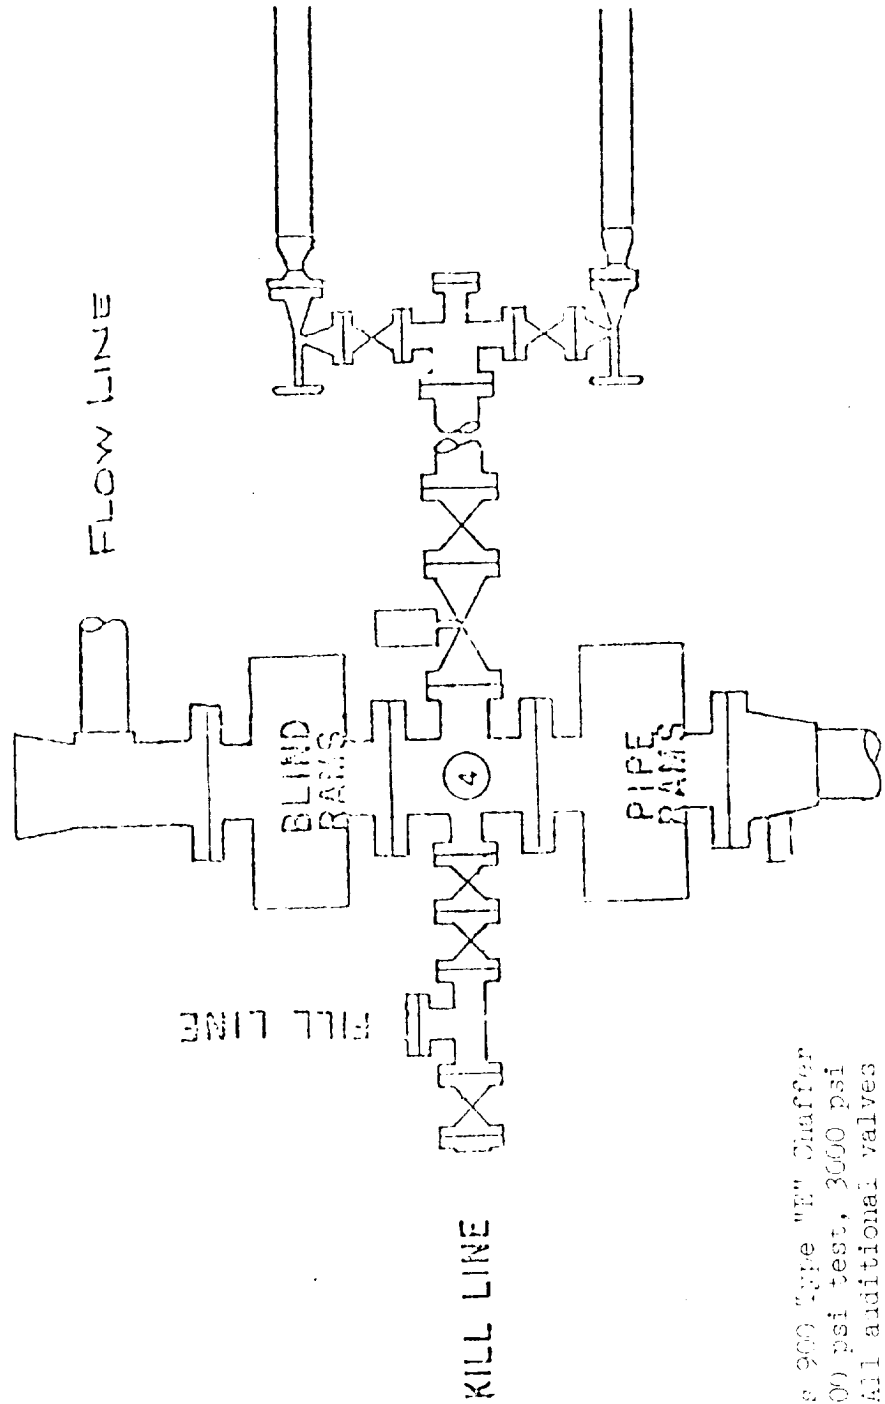


EXHIBIT "E"

KENAI OIL & GAS, INC.
 Cobb Federal Well No. 1

BOP's are 10" Series 200 Type "E" Chaffar
 Double Hydraulic 6000 psi test, 3000 psi
 working pressure. All additional valves
 & connections are the same test & working
 pressures.