


TEST

After nipping up on surface pipe, but before drilling out the cement plug, the BOP's shall be tested to 80% the rated working pressure.

FREQUENCY

The BOP's shall be cycled on every trip.

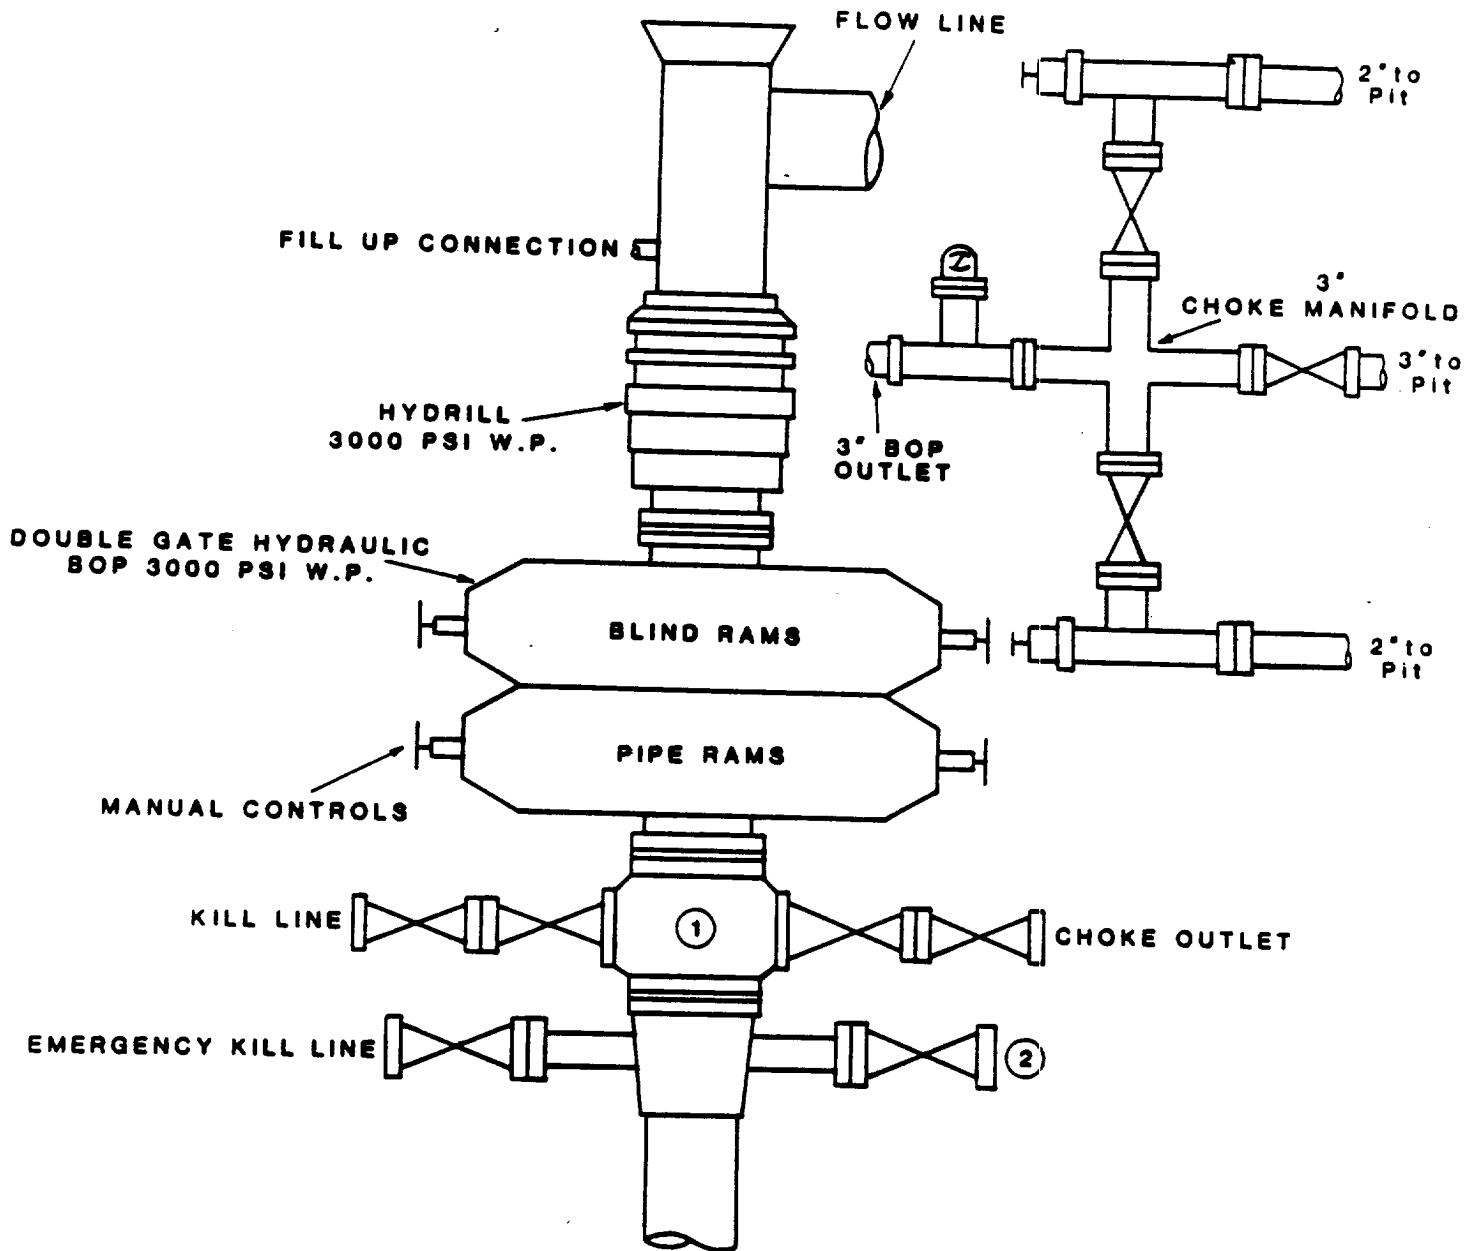

① : 13-5/8" - 3000 wp Drilling Spool (if used)

② : Alternate Choke Outlet if Drilling Spool not used.