


LOCATION	-	 Halliburton OIL WELL CEMENTING COMPANY		Date	9-12-54
FIELD	-			Ticket No.	80999 T
COUNTY	Rio Arriba			HOWCO DISTRICT	Farmington
STATE	New Mexico	HOLE & TOOL DATA		Kind of Job	Open Hole
CONTRACTOR	Corbett Drilling Co.	Total Depth	7535'	Casing Perforations	Top - Bottom -
		Top Packer Depth	-	Bottom Packer Depth	7486'
MUD DATA		Casing or Hole Size	7"	Liner or Rathole Size	5"
Kind	Oil Base	Formation Tested	Morrison	Safety Joint	\$ 15.00
Weight	8.9 lbs.-gal.	Size Drill Pipe	2 7/8 IF	Size Drill Collars	-
Viscosity	49 Sec.	Size Bottom Choke	1 1/2"	Size Surface Choke	1"
Filter Loss	5.2 c. c. Filter Cake 1/32 in.	Size Tool Valve	-	Size Pilot Valve	-
ST. P.R.D. No.	226 Blanked Off No	Size Hook Wall Packer	-	Size Rings	-
12 Hr. Clock No.	1136	Size D. E Wall Packer	3 3/4 DEMP	No. Packers	1
Est. Gauge Depth Temp.	150 °F	PRD Device No.	-	Blanked Off	-
Pressure Readings	Field	Office Corrected	Size & Length Anchor 2 7/8 x 48'		
Initial Hydro Mud Pressure	3450	3425 p.s.i.	REMARKS: Test liner. Recovered 3600' water.		
Initial Flow Pres.	110	50 p.s.i.			
Tool Open	2 hours				
Final Flow Pres.	1490	1500 p.s.i.			
Time Closed In	15 minutes				
Closed in Pres.	3260	3230 p.s.i.			
Final Hydro Mud Pressure	3395	3425 p.s.i.	Amount of Cushion	None	All depths measured from R.T.
				No. Folders Reproduced	5

HOWCO 899-R1-LITTLE'S 39409 10M 4-52

PRESSURE

TIME

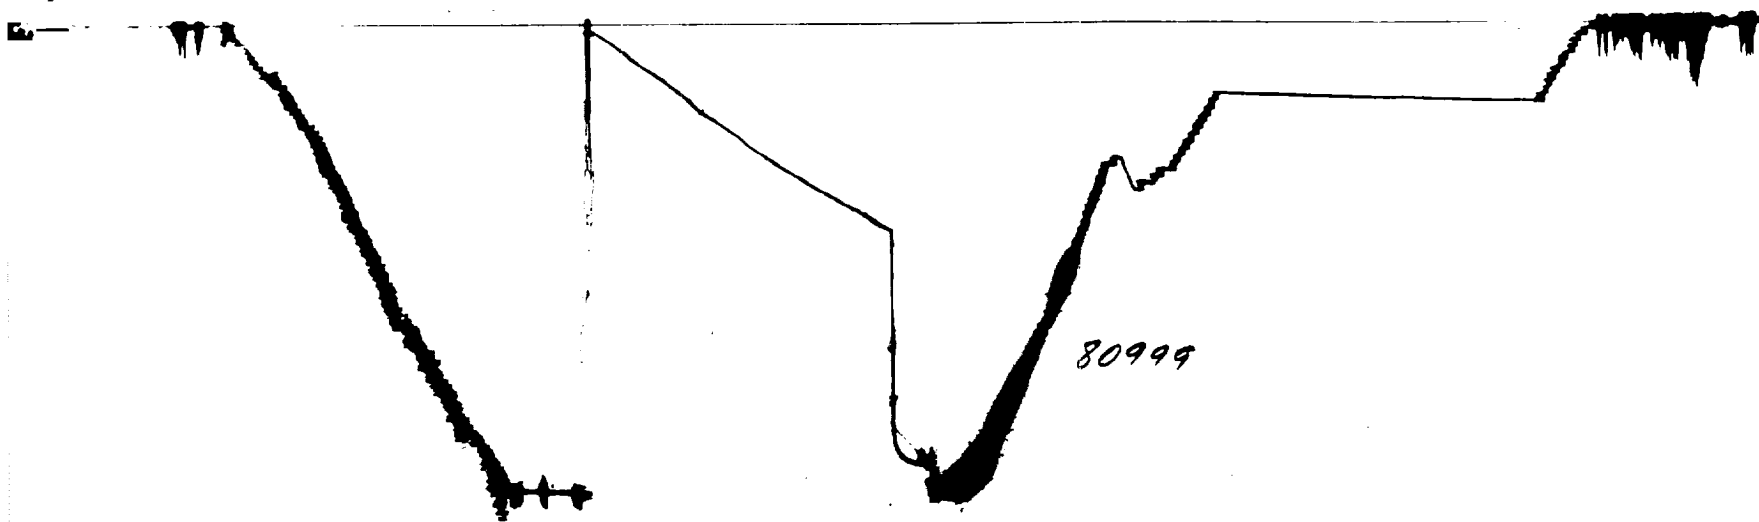

Each Horizontal Line Equal to 1000 p.s.i.