


Operator Prairie Sun, Inc.  
 Well Heahene 'C' Federal #2  
 Unit P Section 21 Township 18 Range 31  
 API # 30-015-26486

TOPS

Rustler	6041
Salado	7631
B Salt	2035'
Yates	2206'
Trivers	2595'
Queen	3272'
Grayburg	3750'

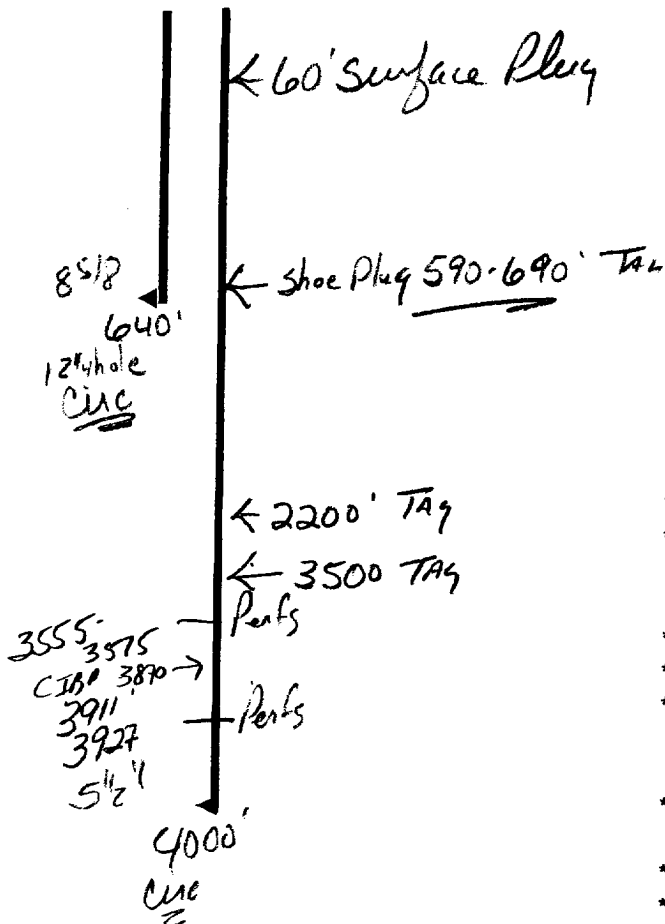

- \* Contact OCD 24 hrs. prior to any work done.
- \* Salt gel mud consisting of 10# brine with 25# of gel per barrel must be placed between each plug.
- \* Install dry hole marker as per Rule 202.B.2
- \* Plugs are to be set from point indicated up.
- \* Plugs must not be less than 100' or 25 Sacks of cement, whichever is greater, unless specifically indicated.
- \* Shoe and stub plugs will be 50' above and below shoe or stub and tagged.
- \* Surface plug will be from 0' - 60'
- \* Where plugs are required, cement must be placed inside and outside of all casing string(s) in the correct footage or sacks required, if no cement exists.
- \* Plugs to be tagged will be indicated.