


Operator SDX Resources  
 Well Mittman Street #1  
 Unit M Section 11 Township 19 Range 28  
 API # 30-015-28457

**TOPS**

Salado	2	350'
B Salt	2	625'
Grates		1048'
Primers		1145'
Gallen		1650'
Penrose		1785'
Grayburg		2011'
San Andres		2414'

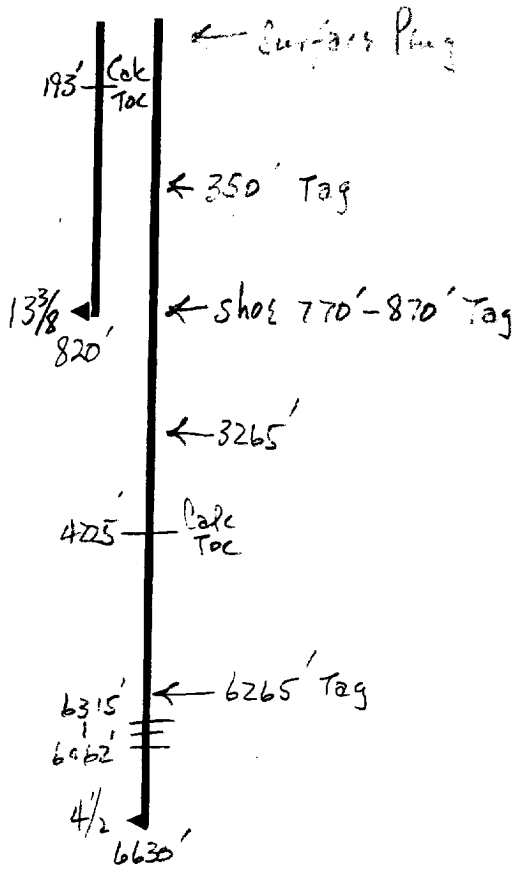

- \* Contact OCD 24 hrs. prior to any work done.
- \* Salt gel mud consisting of 10# brine with 25# of gel per barrel must be placed between each plug.
- \* Install dry hole marker as per Rule 202.B.2
- \* Plugs are to be set from point indicated up.
- \* Plugs must not be less than 100' or 25 Sacks of cement, whichever is greater, unless specifically indicated.
- \* Shoe and stub plugs will be 50' above and below shoe or stub and tagged.
- \* Surface plug will be from 0' - 60'
- \* Where plugs are required, cement must be placed inside and outside of all casing string(s) in the correct footage or sacks required, if no cement exists.
- \* Plugs to be tagged will be indicated.

10.