


NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	✓
FILE	✓
U.S.G.S.	
LAND OFFICE	
OPERATOR	✓

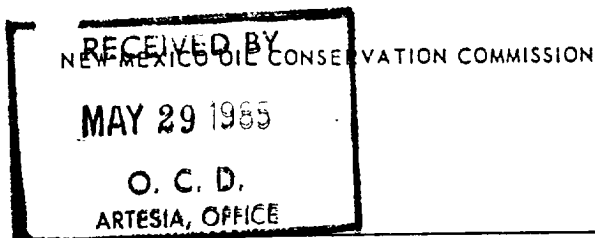

Form C-103  
Supersedes Old  
C-102 and C-103  
Effective 1-1-65

5a. Indicate Type of Lease  
State ☐ Fee ☒  
5. State Oil & Gas Lease No.

**SUNDRY NOTICES AND REPORTS ON WELLS**  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL ☐ GAS WELL ☒ OTHER ☐  
Name of Operator  
Flag-Redfern Oil Company ✓  
Address of Operator  
P.O. Box 11050 Midland, Texas 79702  
Location of Well  
UNIT LETTER G 1980 FEET FROM THE North LINE AND 1980 FEET FROM  
THE East LINE, SECTION 32 TOWNSHIP 20S RANGE 28E N.M.P.M.  
15. Elevation (Show whether DF, RT, GR, etc.)  
GR 3212'

7. Unit Agreement Name  
8. Farm or Lease Name  
Keystone  
9. Well No.  
1  
10. Field and Pool, or Wildcat  
Burton Flat Morrow  
12. County  
Eddy

16. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>		CASING TEST AND CEMENT JOBS <input type="checkbox"/>	
OTHER Plugback Morrow and recompleate in Atoka. <input checked="" type="checkbox"/>		OTHER <input type="checkbox"/>	

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

1. RU wireline. Set CIBP at 11120'. Using dump bailer. Dump 35' cement on CIBP. (Existing Morrow perforations are from 11155-11490'.)
2. TIH with Baker Model R Double Grip Packer. Set packer at 10500±. Perforate Atoka as follows: 10595-599 (16 holes) and 10545-553 (16 holes).
3. Flow well back and test.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED Kelly J. [Signature] TITLE Engineer DATE 5-24-85  
APPROVED BY \_\_\_\_\_ TITLE ORIGINAL SIGNED BY LARRY BROOKS DATE MAY 31 1985  
CONDITIONS OF APPROVAL, IF ANY: GEOLOGIST - NMOCD