


UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or to enter a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.

SUBMIT IN TRIPLICATE

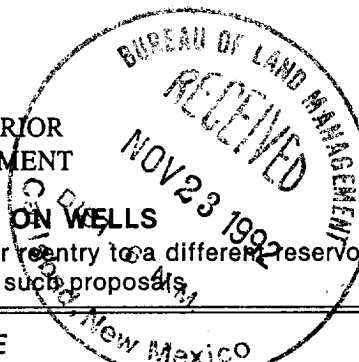

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

5. Lease Designation and Serial No.
NM 490

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Lechuguilla Canyon AJ Fed #1

9. API Well No.

30-015-22978

10. Field and Pool, or Exploratory Area

Undes. Morrow/Atoka

11. County or Parish, State

Eddy, NM

RECEIVED

DEC 31 1992

O. C. D.

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Add Morrow pay,
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

possibly test Atoka & recomplete (Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Well presently completed in Morrow perforations 10083-10096'. Propose to add pay in Morrow Sand 10026-10034'. Will treat as necessary. If Morrow 10026-10034' is non-productive or very marginal, decision may be made to test Atoka. Will reset RBP at 10000', test to 2000 psi, dump 2-3 sx sand on top and TOOH w/packer. RU and dump one bailer of cement on top of RBP. Perforate the Atoka 9657-9728' (14 shots). Acidize and frac Atoka if warranted. Flow/swab test Atoka.

Depending on results, might recomplete to Atoka and apply for commingling Atoka and Morrow when pressures decline.

Will file recompletion if well is recompleted in Atoka zone.

14. I hereby certify that the foregoing is true and correct

Signed David A. Glass

Title Production Supervisor

Date 11-20-92

(This space for Federal or State office use)

Approved by David A. Glass

Title PETROLEUM ENGINEER

Date 12-28-92

Conditions of approval, if any: