


Drilling Log (Attach Hereto) ☐Completion Date 9/7/78

Well Name <u>S.J. 28-6 #53</u>		Location <u>SW 8-27-6</u>		CPS No. <u>1289 W</u>	
Type & Size Bit Used <u>6 7/4"</u>				Work Order No. <u>52955-19</u>	
Anode Hole Depth <u>320 T.D.-313</u>		Total Drilling Rig Time <u>Hole #1 = 61 SACKS</u>		Total Lbs. Coke Used <u>Hole #2 = 25 SACKS</u>	
Anode Depth <u>290</u>		<u>280</u>		<u>270</u>	
<u>260</u>		<u>195</u>		<u>185</u>	
<u>175</u>		<u>130</u>		<u>95</u>	
<u>85</u>					
Anode Output (Amps) <u>1 1.3</u>		<u>2 1.5</u>		<u>3 3.9</u>	
<u>4 2.03</u>		<u>5 2.8</u>		<u>6 2.6</u>	
<u>7 1.9</u>		<u>8 1.5</u>		<u>9 1.5</u>	
<u>10 2.7</u>					
Anode Depth <u>120</u>		<u>90</u>		<u>80</u>	
<u>15</u>		<u>16</u>		<u>17</u>	
<u>18</u>		<u>19</u>		<u>20</u>	
Anode Output (Amps) <u>1 2.0</u>		<u>2 1.8</u>		<u>3 1.8</u>	
<u>15</u>		<u>16</u>		<u>17</u>	
<u>18</u>		<u>19</u>		<u>20</u>	
Total Circuit Resistance Volts <u>12.1 V</u>		Amps <u>10.7 A</u>		Ohms <u>1.13</u>	
No. 5 C.P. Cable Used		No. 2 C.P. Cable Uses			

Remarks: STATIC 600' W. = .91 V. Driller said WATER AT 80' APPROX.
12 GAL/MIN Took WATER sample. Drilled To 280'. NOT enough hole
Drilled To 320'. Logged 313'. Hole caved, Retrieved #4 Anode
#1 + #2 did NOT get coke around them. INSTALLED 300' of
1" P.V.C. VENT Pipe Perforated 260'. Anodes #11, #12, + #13 are in #2
Hole, 20' from #1 Hole. 155' of 1" P.V.C. VENT Perforated 120'.
Ditch & 1 cable = 445'
EXTRA CABLE = 350'
Stub pole + 40V 16A Rect.
Hole depth - 187'

GROUND BED LAYOUT SKETCH

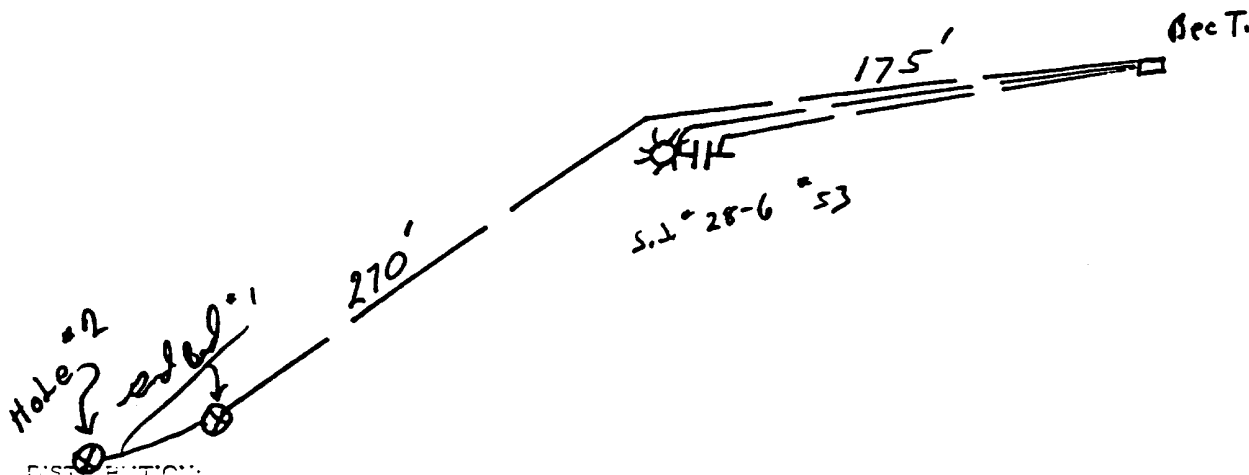

DISTRIBUTION:

WHITE - Division Corrosion Office
 YELLOW - Area Corrosion Office
 PINK - Originator File

