

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE
Other instructions on re-
verse side

Form approved.
Budget Bureau No. 1004-0135
Expires August 31, 1985

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐		7. UNIT AGREEMENT NAME BIG EDDY UNIT
2. NAME OF OPERATOR MYCO INDUSTRIES, INC.		8. FARM OR LEASE NAME BIG EDDY UNIT ✓
3. ADDRESS OF OPERATOR 207 SOUTH 4th., ARTESIA, NM. 88210		9. WELL NO. 110 ✓
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.) At surface ✓ 2310' FNL & 330' EEL, SEC. 9 T 22s R 28e.		10. FIELD AND POOL, OR WILDCAT INDIAN DRAW DELAWARE, EAST
14. PERMIT NO.		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA UNIT H SEC. 9 T 22s R 28e
15. ELEVATIONS (Show whether DF, RT, GR, etc.) 3137 GR.		12. COUNTY OR PARISH EDDY
		13. STATE NM

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

WATER SHUT-OFF

REPAIRING WELL

FRACTURE TREAT

MULTIPLE COMPLETE

FRACTURE TREATMENT

ALTERING CASING

SHOOT OR ACIDIZE

ABANDON*

SHOOTING OR ACIDIZING

ABANDONMENT*

REPAIR WELL

CHANGE PLANE

(Other)

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

TD 6075' PBD 6007' 8 5/8"-423'-CIRC. 5 1/2"-6075'-900 SX. TOC 1780' CBL.

PERFORATIONS OPEN ARE 4079'-4088' & 5908'-5915'

PROPOSE TO P/A AS FOLLOWS STARTING AT 7:00 AM TUESDAY JUNE 11, 1991

A- SET A CIBP @ 4025' CAP W/ 15 SX CEMENT

B- LOAD HOLE WITH MUD LADEN FLUID (9.0 ppg minimum)

C- SET A CIBP @ 2300' CAP W/ 15 SX CEMENT

D- PERF @ 460' SET SQUEEZE RETAINER @ 450' * CEMENT TO SURFACE IN/OUT 5 1/2"

E- SET REGULATION DRY HOLE MARKER

F- CLEAN LOCATION & RE-SEED PER BLM SPECS.

G- NOTIFY BLM - CARLSBAD 24 HRS. PRIOR TO P/A

* MAY NOT BE ABLE TO BRING CEMENT TO SURFACE BEHIND 5 1/2", IF UNABLE - SQUEEZE ONLY.

→ SET A CIBP @ 5875' W/15 SACK CMT CAP.

(SJS)

18. I hereby certify that the foregoing is true and correct

SIGNED

W.A. Gressett

TITLE CONSULTANT

DATE 5/23/91

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

6/5/91

CONDITIONS OF APPROVAL, IF ANY:

* All changes as per telecon w/ W.A. Gressett, 6/5/91.

(SJS)

*See Instructions on Reverse Side

MYCO INDUSTRIES, INC. -

BIG EDDY UNIT #110

UNIT H S9-T22S-R28E


EDDY COUNTY, NM

LSE# LC-060613

SPUD: 3-6-85

COMP: 6-20-85

POOL: INDIAN DRAW DELAWARE, E.

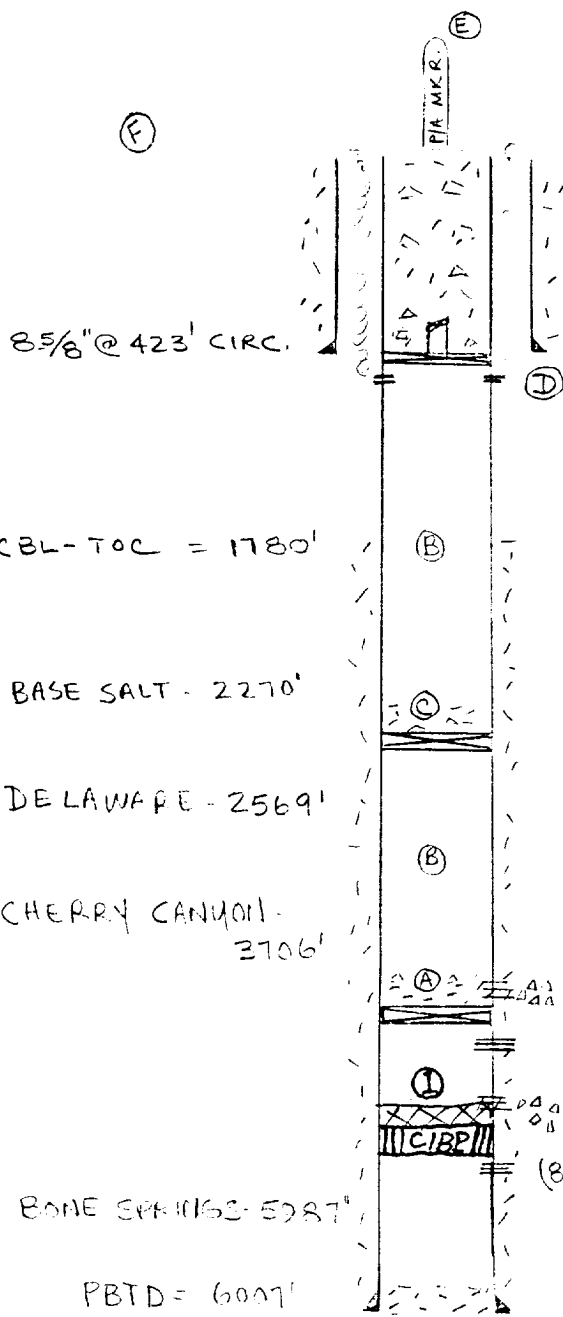

- ① CIBP @ 5875' W/15 SXS (35') ^(SXS)
- Ⓐ CIBP @ 4025' W/15-SXS (35')
- Ⓑ LOAD HOLE MUD LADEN FLUID (9.0 lb/gal)
- Ⓒ CIBP @ 2300' W/15-SXS (35') ^(SXS)
- Ⓓ PERF 460'
- CMT SQ RET @ 450'
- * CMT TO SURFACE IN/OUT 5 1/2"
- Ⓔ REGULATION DRY HOLE MRR.
- Ⓕ CLEAN+RE-SEED PER BLM SPECS
- Ⓖ NOTIFY BLM-CARLSBAD 24-HRS PRIOR TO PIA. (887-6544)

* MAY NOT BE ABLE TO BRING CMT TO SURFACE BEHIND 5 1/2" IF UNABLE - SQUEEZE ONLY

CBL-TOC = 1780'

BASE SALT - 2270'

DELAWARE - 2569'

CHERRY CANYON - 3706'

BONE SPRINGS - 5287'

PBTD = 6007'

Ⓐ PERFS SQZ'D. 3884-3921' W/100-SXS (9-HOLES) 4079-88'

Ⓓ PERFS SQZ'D. 4151-51' W/50-SXS (8-HOLES) 5908-15'

5 1/2" @ 6075' W/900-SXS TOC W/CBL = 1780'