

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.

SUBMIT IN TRIPLICATE

1. Type of Well
☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator


Pacific Enterprises Oil Company (USA)

3. Address and Telephone No.

P.O. Box 2500, Casper, Wyoming 82602 (307) 237-8461

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1980' FNL & 814' FWL (SWNW)
Section 2, T23S-R26E

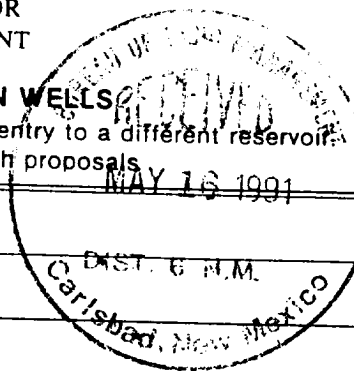

5. Lease Designation and Serial No.

NM0331649

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA, Agreement Designation

N/A

8. Well Name and No.

Boeing Fed "2" Comm 1

9. API Well No.

30-015-26682

10. Field and Pool, or Exploratory Area

Frontier Hills

11. County or Parish, State

Eddy County, New Mexico

RECEIVED

JUN 10 1991

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☒ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other _____
- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

The subject well was drilled to a total depth of 11,940', and was then plugged back to 5,338' with plugs set as follows:

Plug #1 - set from 11,302' to 11,502', consisting of 105 sx of Class H mixed @ 15.6 ppg. This plug was tagged with the drill pipe and witnessed by a BLM representative.

Plug #2 - set from 8,640' to 8,740', consisting of 65 sx of Class H mixed @ 15.6 ppg.

Plug #3 - set from 5,351' to 5,551', consisting of 105 sx of Class H mixed @ 15.6 ppg. A cement retainer was set at 5,351', and 13' of cement was placed on top of the retainer. The cement top is at 5,338'. 9-5/8", 40# pipe remains in the hole from 0' to 5400'.

We are presently evaluating the feasibility of attempting a completion in the Delaware Formation. We will provide details in a later Sundry Notice if the decision is made to attempt a completion.

14. I hereby certify that the foregoing is true and correct


Signed William C. Heisner, Jr.
(This space for Federal or State office use)

Title District Landman

Date 05-14-91

Approved by _____
Conditions of approval, if any:

Title _____

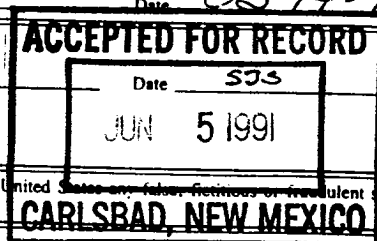

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side