

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)


1. oil ☐ gas ☒ other ☐
2. NAME OF OPERATOR
El Paso Natural Gas Company
3. ADDRESS OF OPERATOR
P. O. Box 289, Farmington, N.M. 87401
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1090' FNL, 990' FWL, Sec. 18, T27N,
AT TOP PROD. INTERVAL: R7W
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☒
(other)

SUBSEQUENT REPORT OF:

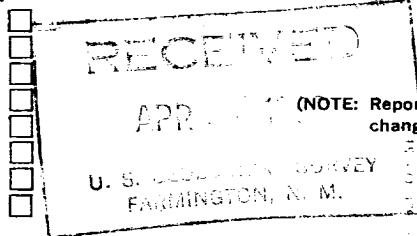

5. LEASE
SF 078840
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
San Juan 28-7
9. WELL NO.
#39
10. FIELD OR WILDCAT NAME
So. Blanco Pictured Cliffs
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Unit D, Sec. 18, T27N, R7W
12. COUNTY OR PARISH
Rio Arriba
13. STATE
New Mexico
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
6567' DF 6557' GL

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

The following procedure is proposed to plug and abandon the subject well:

- 1) Pull 1" tubing and run 3000' of 2" workstring.
- 2) Circulate mud mixed w/25 sks gel/100 barrels.
- 3) Spot 50 sk. cement plug to fill open hole and 350 into 5-1/2" casing to 2600'.
- 4) Perf 4 squeeze holes at 2100' and spot a 60 sk plug (200'). Pressure displace cement through perfs to 1950'.
- 5) Perf 4 squeeze holes at 200' and spot a 75 sk plug from 200' to surface. Pressure displace cement through perfs to surface. Install dry hole marker.
- 6) Clean up and reseed location.

Subsurface Safety Valve: Manu. and Type _____

18. I hereby certify that the foregoing is true and correct

SIGNED Douglas W. Mansueti TITLE Production Engineer DATE April 15, 1982

APPROVED BY _____ (This space for Federal or State office use)

APPROVED BY
CONDITIONS OF APPROVAL

APPROVED

APR 22 1982

For JAMES F. SIMS
DISTRICT ENGINEER

NMOCC

*See Instructions on Reverse Side