

487

BASS ENTERPRISES PRODUCTION CO.

DIVISION PRODUCTION OFFICE

P. O. BOX 2760

MIDLAND, TEXAS 79702

April 12, 1984

800 VAUGHN BUILDING  
(915) 684-5723

RE: Bass 7 Federal #1 ✓  
LC-060572-A  
NE SW Section 7 T21S, R28E  
Eddy County, New Mexico

Bureau of Land Management  
P. O. Box 1397  
Roswell, New Mexico 88201

Attn: Bob Pitschke


Gentlemen;

Please find the attached Sundry Notice form 9-331 along with a revised well diagram sketch for our Bass 7 Federal #1 location. The change in the casing program is to comply with New Mexico State Rules (Order #63) concerning underground waters. The lease name has also been changed from Bass Federal 7 #1 to Bass 7 Federal #1.

If you have any questions, please contact me or L. M. Cure at the letterhead address.

Very truly yours,

  
J. E. Pullio  
Division Manager



JEP:SDS/smm  
Attachment

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen a well as a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ gas ☐ other ☐  
2. NAME OF OPERATOR  
PERRY R. BASS ✓  
3. ADDRESS OF OPERATOR  
P. O. BOX 2760, MIDLAND, TEXAS 79702  
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 1900' FSL & 1760' FWL, Sec. 7  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☒  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) LEASE NAME CHANGE

SUBSEQUENT REPORT OF:

☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐

5. LEASE  
LC-060572-A  
6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
-----  
7. UNIT AGREEMENT NAME  
-----  
8. FARM OR LEASE NAME  
BASS 7 FEDERAL  
9. WELL NO.  
1  
10. FIELD OR WILDCAT NAME *Wildcat*  
EDDY UNDESIGNATED (DELAWARE)  
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Section 7 T21S, R28E  
12. COUNTY OR PARISH  
EDDY  
13. STATE  
NEW MEXICO  
14. API NO.  
15. ELEVATIONS (SHOW DF, KDB, AND WD)  
GL 3161.3'

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
20"	16" Conductor	--	40'±	Cir. to Surface (Ready-mix)
15"	11-3/4"	42	400'±	Cir to Surface
11"	8-5/8"	24	2500'±	Cir to Surface
*7-7/8"	5-1/2" Liner	14	3300'±	250 sxs Cmt.

\*Note: 5 1/2" liner to have a 200'± overlap.


Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED *Stephen D. Smith* TITLE Engineering Asst. DATE *April 13, 1984*

(This space for Federal or State office use)  
APPROVED BY *Charles L. Smith* TITLE *ARTESIA, OFFICE* DATE *4-19-84*  
CONDITIONS OF APPROVAL, IF ANY:

# BASS 7 FEDERAL # 1 WELL DIAGRAM

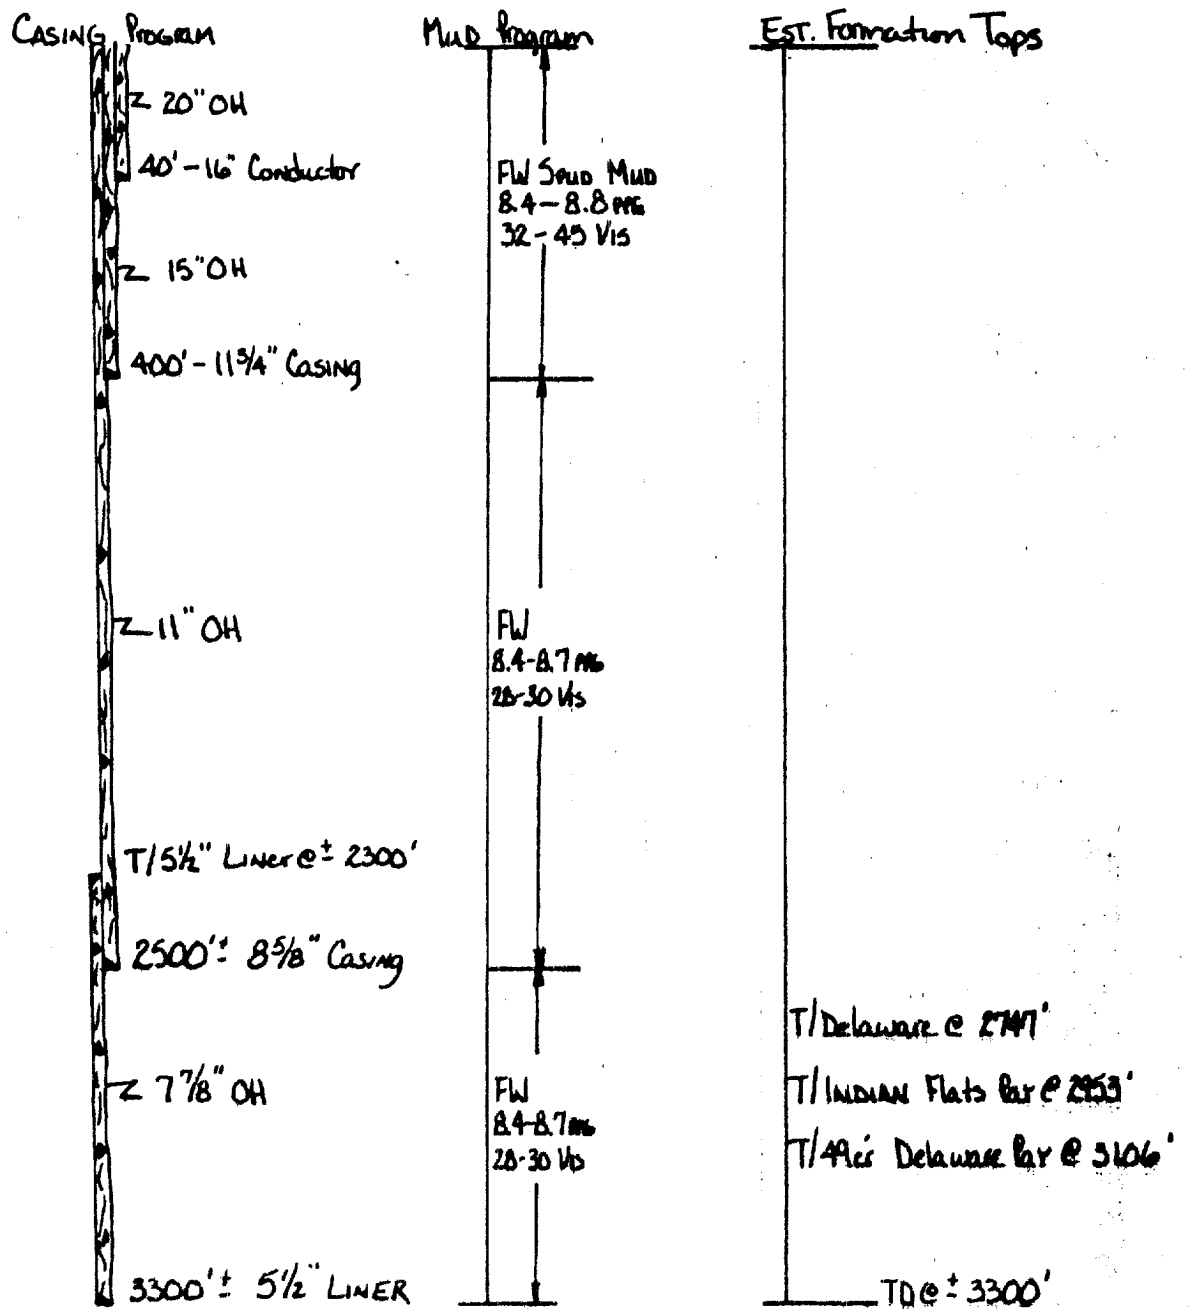

NOTE: Cement to be circulated on 8 5/8" Casing to comply with NM State Rules (Order #63).

SDS 4-12-84