

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other ☐

2. NAME OF OPERATOR  
El Paso Natural Gas Company

3. ADDRESS OF OPERATOR  
P.O. Box 289, Farmington, NM 87401


4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
810'S, 1125'E  
AT SURFACE:  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) ☐

SUBSEQUENT REPORT OF:

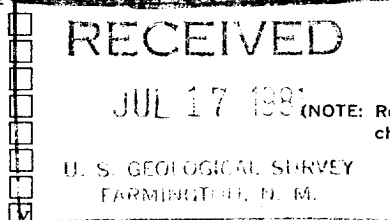

5. LEASE SF 080669

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME  
San Juan 27-4 Unit

8. FARM OR LEASE NAME  
San Juan 27-4 Unit

9. WELL NO.  
74 (P & A)

10. FIELD OR WILDCAT NAME  
Tapacito PC Ext.

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec. 17, T-27-N, R-4-W NMPM

12. COUNTY OR PARISH 13. STATE  
Rio Arriba New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)  
7175' GL

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

7-1-81: Set drillable bridge plug at 3912'. Spot 1st plug w/ 1 1/4", tubing in 2 7/8" casing from 3902' to 3384' w/ 18 cf. cement. Pulled up and spot 2nd plug from 2283' to 1765' w/ 18 cf. cement. Pulled 1 1/4", tubing out of hole. Cut 2 7/8" casing at 612'. Pulled casing out of hole. Tripped in hole w/ 1 1/4" tubing and spot 3rd plug in 7 7/8" hole from 662' to 287' w/ 118 cf. cement. Pulled up and spot 4 th plug in 8 5/8" surface casing from 62' to 9' w/ 18 cf. cement. 3rd plug ties back into surface casing set at 332'. Set dry hole marker.

Subsurface Safety Valve: Manu. and Type

18. I hereby certify that the foregoing is true and correct

SIGNED N. G. Duico TITLE Drilling Clerk DATE July 8, 1981

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

\*See Instructions on Reverse Side

NMOCC

RECEIVED  
AUG 01 1984  
Set @  
OIL CON. DIV. Ft.  
DIST. 3

APPROVED

REC'D, NAT. M. L. SURV. DIV.  
30 1984  
M. MILLENBACH  
AREA MANAGER