

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

RECEIVED  
BLM

FORM APPROVED

Budget Bureau No.1004-035

JAT A118

5. Lease Designation and Ser. No

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.

Use "APPLICATION FOR PERMIT" For such proposals

04 AUG 26 AM 11:05

910 ALBUQUERQUE, N.M.

6. If Indian, Allottee or Tribe Name

Jicarilla Apache Corp

7. If Unit or CA, Agreement Designation

SUBMIT IN TRIPLICATE

1. Type of Well:

X Oil Well Gas Well Other

8. Well Name and No.

JAT A118 #13

2. Name of Operator

Apache Corporation

9. API Well No.

3003923707

3. Address and Telephone No.

210 North Auburn Ave. Farmington, NM 87401 505-325-0318

10. Field and Pool, or Exploratory Area

NE Ojito Gal/Dak

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

2260' FNL x 1970' FWL Sec 35, T26N, R3W

11. County or Parish, State

Rio Arriba, NM

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
Notice of Intent	X Abandonment
X Subsequent Report	Recompletion
Final Abandonment Notice	Plugging Back
	Casing Repair
	Altering Casing
	Other
	(Note: Report results of multiple completions on Well Completion or Recompletion Report and LogForm.)
	Change of Plans
	New Construction
	Non-Routine Fracturing
	Water Shut-Off
	Conversion to Injection
	Dispose Water

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Apache Corporation P&A'd this well, starting on 8-9-04, per the attachment report. The location will be ripped and reseeded, with another Sundry Notice to follow.

14. I Certify that the foregoing is true and correct.

Signed David R. Sitzler Title Sr. Production Foreman

Date 8-24-04

(This space for Federal or State office use)

Approved by David R. Sitzler

Title Division of Multi-Resources

Conditions of approval, if any:

SEP 27 2004

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly to make to any department or agency to the United States any false, fictitious or

Fraudulent statements or representations as to any matter within its jurisdiction.

Apache Corporation

JAT A118 #13

SE NW Sec 35 T46N R3W


Rio Arriba Co. N.M.

API # 3003923707

P&A Wellbore Diagram

All cement class C

Spacer Fluid - WATER

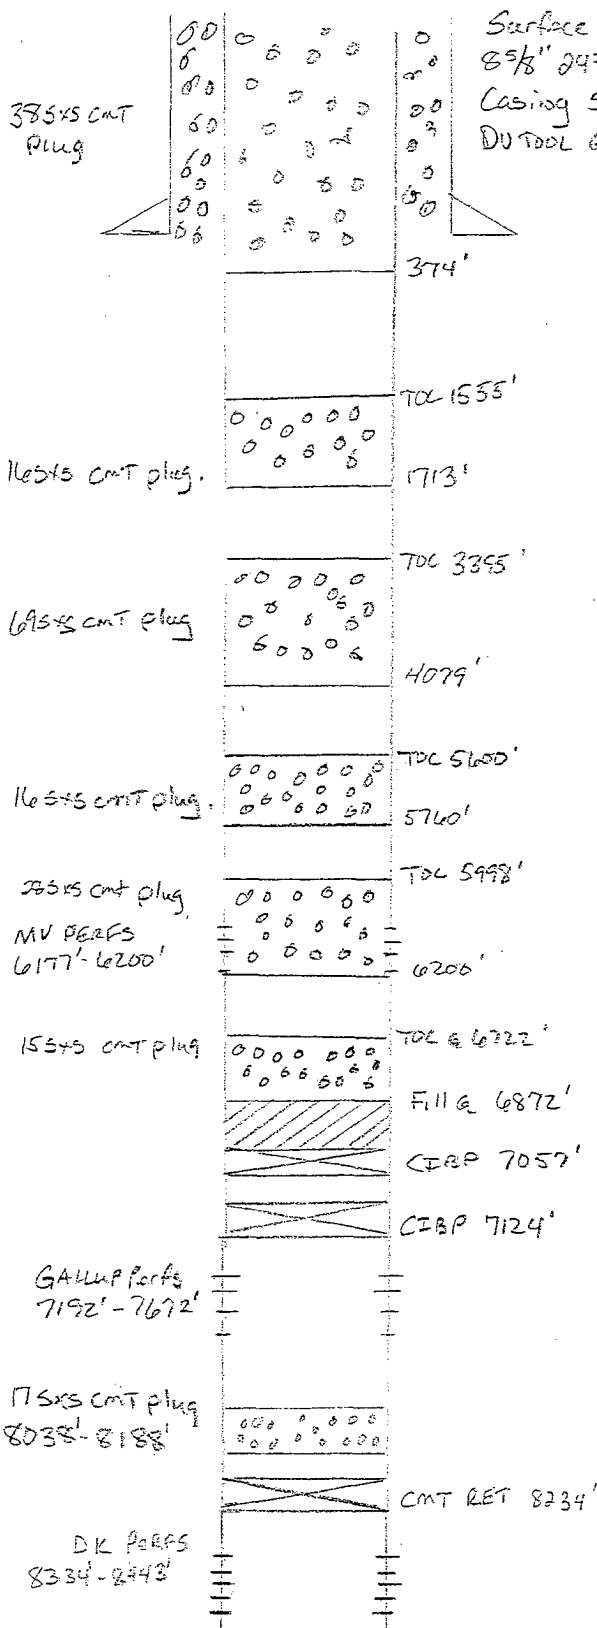

8-9-04 mirror. A-plus well service.

TOH w/ Rods, NUBOP, TOH w/ TAB. Tally out.

8-10-04 (ALFONSO ATENCIO BLM INSP. ON Location)

TIH w/ TAB TAB Fill @ 6872', Pump CMT Plug from 6872' TO 6722', TOH TO 5760' 285x5 w/ 1165x5 cement. WOL, TIH TO TAB cement (Cement plug had failed) SDFN.

8-11-04 Press Test casing TO 500 psi Hold for 15 min.

TIH w/ TAB TAB CMT TOP @ 5998' (Cement covering no perfs)

Pump CMT plug from 5760' TO 5600'

Pump CMT plug from 4079' TO 3995'

Press Test Braden Head 300psi Hold for 15 min

Pump CMT plug from 1713' TO 1555'

Pump CMT plug from 374' TO surface.

Cut off wellhead, Fill voids, INSTALL P&A marker.

Formation Tops.

Nacimiento	11650'
OJO ALAMO	3500'
Kirtland	3705'
Fruitland	3745'
Pict. Cliffs	4025'
Mesa Verde	5700'
Gallup	7190'
Dakota	8332'