District I 1625 N French Dr , Hobbs, NM 88240 District II 1301 W Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S St Francis Dt., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

1	5	3	٢
---	---	---	---

Pit, Closed-Loop System, Below-Grade Tank, or

75 ³⁵	Proposed Alternativ	e Method Perm	it or Closi	ure Plan App	lication
	☐ Modification t	nt, closed-loop system o an existing permit only submitted for an e	, below-grade	tank, or proposed	
Instructions: Plea	se submit one application (For	rm C-144) per individua	ıl pit, closed-loc	op system, below-gr	ade tank or alternative request
environment Nor does appro-	of this request does not relieve to all relieve the operator of its resp	the operator of liability shousibility to comply with	nould operations any other applic	result in pollution of cable governmental a	surface water, ground water or the uthority's rules, regulations or ordinances
operator <u>WILLIAMS</u>	PRODUCTION COMPANY	Y, LLC		OGRID#	120782
Address. PO Box 640)	Aztec, NM 8	<u>7410</u>		
Facility or well name:	ROSA UI	NIT #36B			
API Number 300	3926600		OCD Po	ermit Number.	
Section 11J	Township 31N	Range	06W	County	RIO ARRIBA
	075 Longitude			Surface Owner.	FEDERAL
String-Reinforced	cy Cavitation P&A				s. L x W x D
Type of Operation. P&. intent) Drying Pad Above Lined Unlined Line	Subsection H of 19 15.17 11 N A	Vorkover or Drilling (A) off Bins		VC □ Other	nor approval of a permit or notice of
Volume: 12 Tank Construction material ☑ Secondary containment	bbsection I of 19 15 17 11 NMA bbl FIBERGLASS TANK w/ with leak detection Visible ner Visible sidewalls only	Type of BANDED 20-mil HE le sidewalls, liner, 6-incl	OPE SECON	DUCED WATER DARY LINER atic overflow shut-company shut-	OHL CONS. DIV. DIST 3
Alternative Method:					

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval

•						
Fencing: Subsection D of 19 15 17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specify	hospital.					
Netting: Subsection E of 19 15.17 11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)						
Signs: Subsection C of 19 15.17.11 NMAC □ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers □ Signed in compliance with 19 15 3 103 NMAC						
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19 15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau office for consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval						
Siting Criteria (regarding permitting): 19.15.17 10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.						
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No					
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No					
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site, Aerial photo; Satellite image	☐ Yes ☐ No ☐ NA					
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits)	Yes No					
 Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site 	☐ Yes ☐ No					
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality, Written approval obtained from the municipality	Yes No					
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site	☐ Yes ☐ No					
Within the area overlying a subsurface mine - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No					
 Within an unstable area. Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map 	☐ Yes ☐ No					
Within a 100-year floodplain - FEMA map	☐ Yes ☐ No					

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19 15 17 9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.							
☐ Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19 15 17 9 NMAC ☐ Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19 15.17 9 NMAC ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15.17.10 NMAC ☐ Design Plan - based upon the appropriate requirements of 19 15.17.11 NMAC							
Operating and Maintenance Plan - based upon the appropriate requirements of 19 15.17.11 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15 17 9 NMAC and 19.15 17 13 NMAC							
☑ Previously Approved Design (attach copy of design) API Number or Permit Number							
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15 17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.							
Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19 15 17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19 15 17 10 NMAC Design Plan - based upon the appropriate requirements of 19 15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17.12 NMAC							
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15 17.19 NMAC and 19 15 17.13 NMAC							
Previously Approved Design (attach copy of design) API Number							
Previously Approved Operating and Maintenance Plan API Number. (Applies only to closed-loop system that use							
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)							
Permanent Pits Permit Application Checklist: Subsection B of 19 15 17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are							
attached.							
Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19 15 17 9 NMAC							
☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17.10 NMAC ☐ Climatological Factors Assessment							
Certified Engineering Design Plans - based upon the appropriate requirements of 19 15.17 11 NMAC							
☐ Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15 17 11 NMAC ☐ Leak Detection Design - based upon the appropriate requirements of 19.15 17 11 NMAC							
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19 15 17 11 NMAC							
Quality Control/Quality Assurance Construction and Installation Plan							
☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17 12 NMAC ☐ Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15 17 11 NMAC							
☐ Nuisance or Hazardous Odors, including H₂S, Prevention Plan							
Emergency Response Plan Out Field Wests Stream Characterization							
Oil Field Waste Stream Characterization Monitoring and Inspection Plan							
Erosion Control Plan							
Closure Plan - based upon the appropriate requirements of Subsection C of 19 15 17 9 NMAC and 19 15 17 13 NMAC							
14 Proposed Closure: 19 15 17 13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.							
Type Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative							
Proposed Closure Method Waste Excavation and Removal							
Waste Removal (Closed-loop systems only)							
☐ On-site Closure Method (Only for temporary pits and closed-loop systems) ☐ In-place Burial ☐ On-site Trench Burial							
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)							
15. Waste Excavation and Removal Closure Plan Checklist: (19 15 17 13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents WILL BE attached WITH CLOSURE REPORT.							
Protocols and Procedures - based upon the appropriate requirements of 19 15 17.13 NMAC							
 ☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19 15 17.13 NMAC ☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) 							
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19 15 17 13 NMAC							
 ☑ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC ☑ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17 13 NMAC 							

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Instructions: Please indentify the facility or facilities for the disposal of liquids, a facilities are required.							
Disposal Facility Name	Disposal Facility Permit Number.						
Disposal Facility Name:	Disposal Facility Permit Number:	<u></u>					
Will any of the proposed closed-loop system operations and associated activities oc ☐ Yes (If yes, please provide the information below) ☐ No	cur on or in areas that will not be used for future serv	vice and operations?					
Required for impacted areas which will not be used for future service and operation Soil Backfill and Cover Design Specifications based upon the appropriate Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection	requirements of Subsection H of 19 15 17 13 NMA(I of 19.15 17 13 NMAC	C					
Siting Criteria (regarding on-site closure methods only): 19 15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.							
Ground water is less than 50 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search, USGS, Data	obtained from nearby wells	☐ Yes ☑ No ☐ NA					
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data	obtained from nearby wells	☐ Yes ☑ No ☐ NA					
Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search, USGS, Data	obtained from nearby wells	☐ Yes ☐ No ☑ NA					
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other sign lake (measured from the ordinary high-water mark) Topographic map, Visual inspection (certification) of the proposed site	nificant watercourse or lakebed, sinkhole, or playa	☐ Yes ☑ No					
Within 300 feet from a permanent residence, school, hospital, institution, or church Visual inspection (certification) of the proposed site, Aerial photo, Satellite		☐ Yes ☑ No					
Within 500 horizontal feet of a private, domestic fresh water well or spring that less watering purposes, or within 1000 horizontal feet of any other fresh water well or spring that less watering purposes, or within 1000 horizontal feet of any other fresh water well or spring that less watering purposes, or within 1000 horizontal feet of any other fresh water well or spring that less watering purposes, or within 1000 horizontal feet of any other fresh water well or spring that less	oring, in existence at the time of initial application.	☐ Yes ☑ No					
Within incorporated municipal boundaries or within a defined municipal fresh wate adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality; Written approve	·	☐ Yes ☑ No					
Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map; Topographic map, Visua	l inspection (certification) of the proposed site	☐ Yes ☑ No					
Within the area overlying a subsurface mine - Written confirmation or verification or map from the NM EMNRD-Mining	and Mineral Division	☐ Yes ☒ No					
Within an unstable area - Engineering measures incorporated into the design; NM Bureau of Geology Society, Topographic map	& Mineral Resources, USGS, NM Geological	☐ Yes 🛛 No					
Within a 100-year floodplain - FEMA map		☐ Yes ☑ No					
On-Site Closure Plan Checklist: (19 15 17 13 NMAC) Instructions: Each of the by a check mark in the box, that the documents are attached. Sting Criteria Compliance Demonstrations - based upon the appropriate requirements of Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Protocols and Procedures - based upon the appropriate requirements of 19.15 Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15 Confirmation Sampling Plan - based upon the appropriate requirements of Subsection H∑ Soil Cover Design - based upon the appropriate requirements of Subsection H∑ Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requiremen	cirements of 19.15.17.10 NMAC Subsection F of 19 15 17 13 NMAC propriate requirements of 19 15.17 11 NMAC and) - based upon the appropriate requirements of 19 15.17 13 NMAC cirements of Subsection F of 19 15.17 13 NMAC Subsection F of 19.15 17 13 NMAC cill cuttings or in case on-site closure standards cannot of 19 15 17.13 NMAC of 19 15 17.13 NMAC	15 17.11 NMAC					

Operator Application Cer I hereby certify that the interest	rtification: Formation submitted with this application is true, accurate and complete to the best of my knowledge and belief						
Name (Print)	Tıtle:						
Signature:	Date·						
e-mail address:	Telephone:						
OCD Approval: Perm OCD Representative Sign Title:							
Instructions: Operators at The closure report is requi	Closure Report (required within 60 days of closure completion): Subsection K of 19 15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.						
☑ Closure Completion	Date: 4/30/10 Disposal Facility Name: _S.J Regional Landfill, NMED Permit SWM-052426_						
Closure Method: Waste Excavation and If different from appro	Removal On-Site Closure Method Alternative Closure Method Waste Removal (Closed-loop systems only) ved plan, please explain.						
Instructions: Please indentwo facilities were utilized. Disposal Facility Name Disposal Facility Name Were the closed-loop system Yes (If yes, please de Required for impacted area Site Reclamation (Please Soil Backfilling and	Disposal Facility Permit Number Disposal Facility Permit Number m operations and associated activities performed on or in areas that will not be used for future service and operations? emonstrate compliance to the items below) \(\subseteq \) No is which will not be used for future service and operations: noto Documentation)						
mark in the box, that the d Proof of Closure Not Proof of Deed Notice Plot Plan (for on-site Confirmation Sample Waste Material Sample Disposal Facility Nat Soil Backfilling and	cice (surface owner and division) c (required for on-site closure) c closures and temporary pits) ing Analytical Results (if applicable) bling Analytical Results (required for on-site closure) me and Permit Number Cover Installation cation Rates and Seeding Technique into Documentation)						
25							
Operator Closure Certific I hereby certify that the info	ration: Date: Date: Date: 1034-424						
- man address	was in the control of						

Below-Grade Tank Removal Closure Plan

In accordance with Rule 19.15.17.13 NMAC, the following plan describes the general closure requirements of below-grade tanks (BGT) on Williams Production Co, LLC (WPX) locations in the San Juan Basin of New Mexico. This is WPX's standard closure procedure for all BGTs regulated under Rule 19.15.17 NMAC and operated by WPX. For those closures which do not conform to this standard closure plan, a separate well/pit specific closure plan will be developed and utilized.

Closure Conditions and Timing:

Pursuant to 19.15.17.13 (A) NMAC, WPX will initiate closure of any BGT should any one of these conditions occur:

- The Division requires closure because of imminent danger to fresh water, public health or the environment.
- The integrity of the BGT fails. Notification will be within 48 hours to the Division and closure will be schedule as specified in 19.15.17.12 (A)(5) NMAC.
- WPX chooses to take the BGT out-of-service due to operational needs. Closure
 under these conditions will be closed within 60 days of cessation of the BGT's
 operation.
- BGTs installed prior to June 16, 2008 that do not meet the requirements under 19.15.17.11.I(6) NMAC and WPX chooses not to retrofit or upgrade. Closure under these conditions will be completed within five years (by June 16, 2013).

General Plan Requirements:

- 1. Prior to initiating any BGT Closure except in the case of an emergency, WPX will review County Tax Records for the current surface owner of record. The surface owner of record will be notified of the intent to closure the BGT by certified mail and a copy of this notification will be included in the closure report. In the case of an emergency, the surface owner of record will be notified as soon as practical.
- 2. Notice of Closure will be given to the Aztec District office between 72 hours and one week of the scheduled closure via email or phone. The notification of closure will include the following:
 - a. Operators Name (WPX)
 - b. Well Name and API Number
 - c. Location (USTR)
- 3. All piping will be rerouted to an alternative produced water storage/disposal location (e.g. surface tanks, temporary frac tank, ...). The well will be temporarily shutin until the rerouting is completed.
- 4. All produced water will be removed from the BGT following discharge-pipe rerouting. Produced water will be disposed at one of the following NMOCD approved facilities depending on the proximity of the BGT site: Rosa Unit SWD #1 (Order: SWD-916, API: 30-039-27055), Rosa Unit #94 (Order: SWD-3RP-1003-0, API: 30-039-23035), Jillson Fed. SWD #001 (Order: R10168/R10168A, API: 30-039-25465), Middle Mesa SWD #001 (Order: SWD-350-0, API: 30-045-27004) and/or Basin Disposal (Permit: NM-01-0005).
- 5. Solids and sludges will be shoveled and /or vacuumed out for disposal at Envirotech (Permit Number NM-01-0011).
- 6. WPX will obtain prior approval from NMOCD to dispose, recycle, reuse, or reclaim the BGT and provide documentation of the disposition of the BGT in the closure report. Steel materials will be recycled or reused as approved by the Division. Fiberglass tanks will be empty, cut up or shredded, and EPA cleaned for disposal as solid waste. Liners materials will be cleaned without soils or contaminated material for disposal as

Oil Conservation Division

solid waste. Fiberglass tanks and liner materials will meet the conditions of paragraph 1 subsection D of 19.15.9.712 NMAC. Disposal will be at a licensed disposal facility, presently San Juan Regional Landfill operated by Waste Management under NMED Permit SWM-052426.

- 7. Any equipment associated with the BGT that is no longer required for some other purpose, following the closure will be removed from the location.
- 8. Following removal of the tank and any liner material, a five-point composite sample will be taken of the excavation and tested per 19.15.17.13(E)(4) NMAC as identified in Table 1. Grab samples will be collected from any area that is wet, discolored or showing other evidence of a release. Results will be report to the Division following receipt from the lab on Form C-141.

Table 1: Closure Criteria for BGTs

Components	Testing Methods	Closure Limits (mg/Kg)
Benzene	EPA SW-846 Method 8021B or 8260B	0.2
BTEX	EPA SW-846 Method 8021B or 8260B	50
TPH	EPA SW-846 Method 418.1(1)	100
Chlorides	EPA SW-846 Method 300.1(1)	250 ⁽²⁾

⁽¹⁾ Method modified for solid waste.

- 9. If the Division and/or WPX determine there is a release, WPX will comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC.
- 10. Upon completion of the tank removal, the excavation will be backfilled with non-waste earthen material compacted and covered with a minimum of one foot of top soil or background thickness whichever is greater and to existing grade. The surface will be recontoured to match the native grade and prevent ponding.
- 11. For those portions of the former pit area no longer required for production activities, WPX will seed the disturbed areas the first growing season after the pit is covered. Seeding will be accomplished via drilling on the contour whenever practical, or by other Division-approved methods. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintained that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs. Note: If a surface owner agreement requires reseeding or other surface restoration that do not meet the revegetation requirements of 19.15.17.13.I NMAC then WPX will submit the proposed alternative with written documentation that the surface owner agrees to the alternative, for Division approval.
- 12. For those portions of the former pit area required for production activities, reseeding will be done at well abandonment, and following the procedure noted above.

Closure Report:

All closure activities will include proper documentation and will be submitted to OCD within 60 days of the BGT closure on a Closure Report using Division Form C-144. The Report will include the following:

- Proof of Closure Notice (surface owner & NMOCD)
- Backfilling & Cover Installation
- Site Diagram with coordinates
- Available Inspection reports

- Confirmation Sampling Analytical
 Paguitte
- Disposal Facility Name(s) and Permit Number(s)
- Application Rate & Seeding techniques
- Photo Documentation of Reclamation

⁽²⁾ If background concentration of Chlorides greater than 250 mg/Kg, then higher concentration will be used for closure.

District I 1625 N French Dr , Hobbs, NM 88240 <u>District III</u> 1301 W Grand Avenue, Artesia, NM 88210 <u>District IIII</u> 1000 Rio Brazos Road, Aztec, NM 87410 <u>District IV</u> 1220 S St Francis Dr , Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Submit 2 Copies to appropriate District Office in accordance with Rule 116 on back side of form

Form C-141


Revised October 10, 2003

Release Notification and Corrective Action

						OPERAT	ГOR		ial Report
Name of Company WILLIAMS PRODUCTION, LLC							Vanessa Fields		
Address	P.O. BOX 640, AZTEC, NM 87410					elephone l		-4209	
Facility Nar	ne Rosa (Jnit # 036B			F	acility Typ	e Well Site		
Surface Ow	ner Fede	ral		Mineral O	wner			Lease	No
Bulluce o W	101. 1000	141						Lease	110.
						OF RE	LEASE		
Unit Letter N	Section	Township	Range	Feet from the	North/S	South Line	Feet from the	East/West Line	County
	11	31N	06W	[
]	_atitude			_	107 43112_		
				NAT	URE (OF REL			
		ease Occurred				Volume of			Recovered
Source of Re Was Immedia		Guan?				If YES, To	lour of Occurrence	e Date an	d Hour of Discovery
was minieur	ate Notice		Yes [No 🛛 Not Re	quired	11 1 ES, 10	w nom /		
By Whom?						Date and H	lour		
Was a Water	course Read		Yes 🗵] No		If YES, Vo	lume Impacting t	he Watercourse.	
If a Watercou	irse was Im	pacted, Descr	ihe Fully	* N/A					
Describe Cause of Problem and Remedial Action Taken * No action required									
Describe Are	a Affected	and Cleanup A	Action Tal	cen *					
N/A									
I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.									
t	Or rocur ru					•	OIL CON	SERVATION	DIVISION
Signature:	Son	OSDO	<u>tree!</u>	Low					
Printed Name	vanessa Vanes	ı Fıelds			A	pproved by	District Supervise	or.	
Title EH&S	Coordinate	or			A	pproval Dat	е.	Expiration	Date
E-mail Addre	ess: Vaness	sa fields@will	iams com		c	Conditions of	Approval		Attached
Date: 10-6	-10		Pho	one: (505) 634-42	09				

^{*} Attach Additional Sheets If Necessary

Willams Production Company Rosa 36B Mesa Verde Sec 11 T31N R6W Rio Arriba County

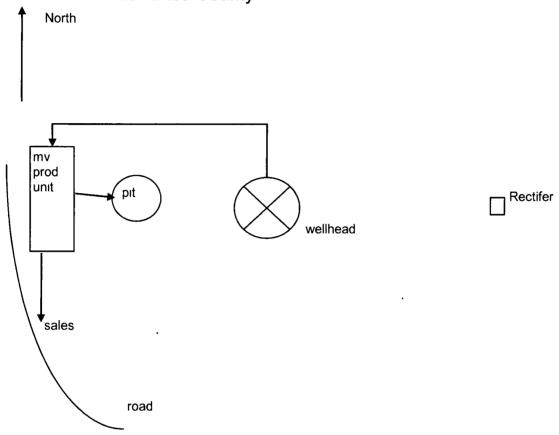

Meador, Tasha

From: Lane, Myke

Sent: Tuesday, April 20, 2010 10:21 AM

To: Powell, Brandon, EMNRDCc: Meador, Tasha; Basye, MattSubject: Notice of Closure - Rosa 36B

Brandon: Williams tentatively plans to initiate closure of the following BGT later this week or next, depending on weather and available resources.

WELLSITE	API	FMT	SEC	TWN	RNG	
Rosa #036B	3003926600	BLANCO MV	11J	31N	06W	

Please contact me if there are any problems or you request additional information. Thanks for your consideration

Michael K. (Myke) Lane, PE EH&S Team Leader - San Juan Basin Operations 721 S. Main/PO Box 640, Aztec, NM 87410 (505) 634-4219(off); -4205(fax); 330-3198(cell)

"The problems we face cannot be resolved at the same level of thinking as that which gave rise to them!"--- shared with me by Brent Hale

Fields, Vanessa

From:

Meador, Tasha

Sent:

Monday, August 16, 2010 2:07 PM

To:

Fields, Vanessa

Subject:

FW. Request for Review of Closure Plan - Rosa 148B, 30, 9B, and 36B

Tasha Meador

EH&S Coordinator Williams Exploration & Production 721 S Main Aztec, NM Office: 505-634-4200

Direct:505-634-4241 Fax: 505-634-4205

tasha.meador@williams.com

From: Lane, Myke

Sent: Wednesday, February 24, 2010 3:40 PM

To: Jones, Brad A., EMNRD

Cc: Powell, Brandon, EMNRD; Meador, Tasha; Basye, Matt

Subject: Request for Review of Closure Plan - Rosa 148B, 30, 9B, and 36B

Brad:

We need to take the following below grade tanks out of service, and we would like to close this existing BGTs. We request your review to allow closure

WELLSITE	API	FMT	· SEC	TWN	RNG	 _
Rosa #030	3003925570	BLANCO MV	120	31N	06W	
Rosa #148B	3003926985	BLANCO MV	2P	31N	06W	
Rosa #009B	3003927042	BLANCO MV	11E	31N	06W	
Rosa #036B	-3003926600	BLANCO MV-	*11J	· 31N	- 06W	
Rosa #009	3003907975	BLANCO MV	11K	31N	06W	

Please contact me if there are any problems or you request additional information Thanks for your consideration

Michael K. (Myke) Lane, PE EH&S Team Leader - San Juan Basin Operations



WM of MM, - San Juan County 78 County Road 3140 / Aztec, NM, 87410 Ph: (505) 334-1121

Original : Ticket# 1276668

Customer Name WILLIAMSPRO WILLIAMS PRODUCTI Carrier Ticket Date 05/21/2010 Bayment Type Credit Account Manual Ticket# Hauling Ticket# -

Route, 1 State Waste Code Manifest Destination Profile

VAUOIL VAUGHN OILFIELD SERVICESP INC Vehićle# Container Driver Checkit Billing # 0000114 Gen EPA ID

·Volume

Time Scale Operator 18 05/21/2010 07:05:46 Inbound 301 MMORGAN 808 05/21/2010 07:43:37 Outpound 302 MMORGAN

· Operator


Inbound Gross Tare Net ::


45640 1b 38920 1b 6720 1b

Generator

Product	Contract of the second	LD	Oty. UON	Rate	Tax	Amount	Origin
A COMPANY OF	ISW-Loose-	Yds; 100	; 28.00 Yar	ds (51,51,	§	4154.28	RIGARRIDA

9,9B,148B,149B,181C

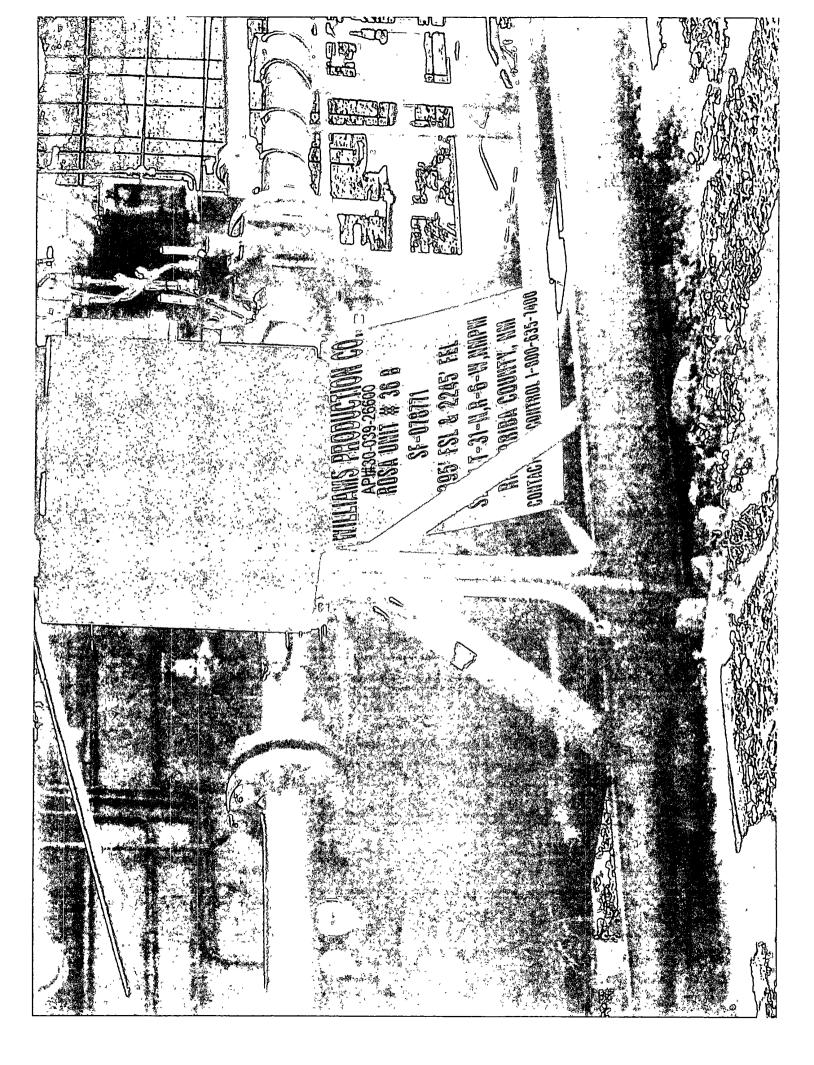

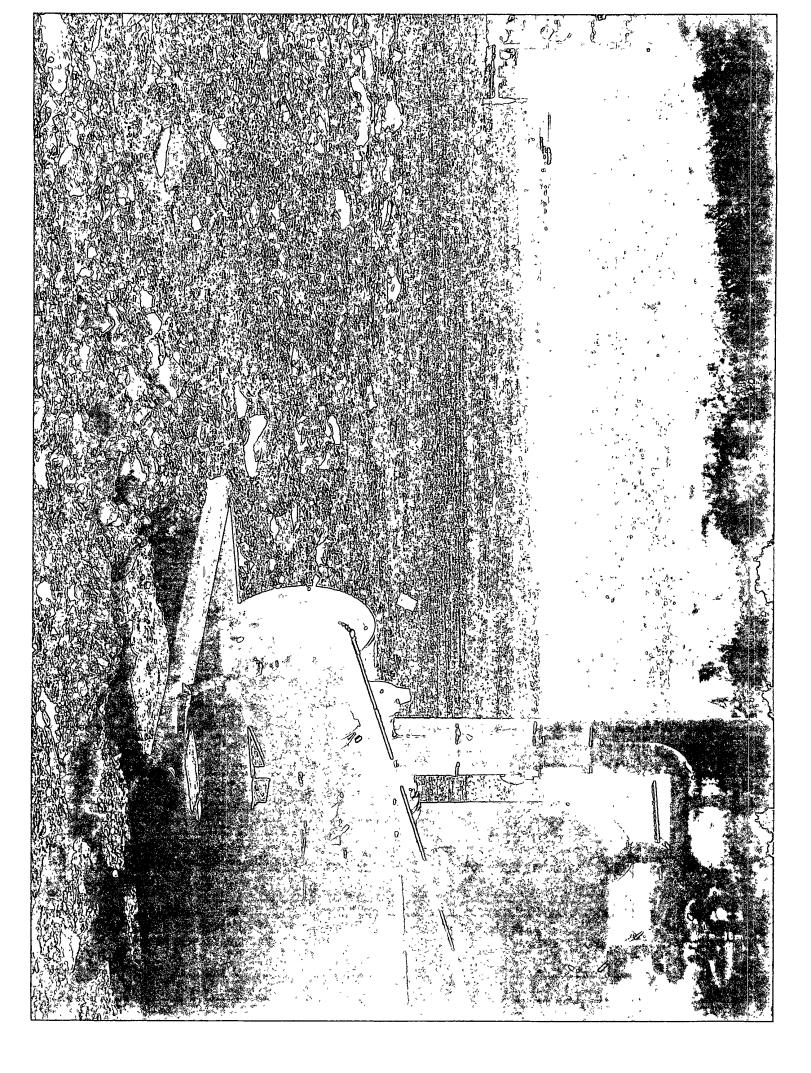



Exploration & Production PO Box 640 Aztec NM B1137 505/634 4219 505/634 4214 Fax

March 10, 2009

Mr Mark Kelly Bureau of Land Management Farmington Field Office 1235 La Plata Hwy Farmington, NM 87401

Sent via Certified Mail

RE Notification of Production Pit Closure

Rule 19 15 17 13 NMAC

Production Pits associated Natural Gas Development

Operated by Williams Production Co. LLC.

Pursuant to Rule 19 15 17 13 NMAC this correspondence is to notify the Bureau of Land Management, Farmington Field Office of Williams Production LLC's (Williams') intent to clean close all production pits on the attached list of wells operated with the District in San Juan County and Rio Arriba County, New Mexico Closure will follow the plan included with this correspondence

Thank you for your consideration. If there are any questions or additional information is requested, please contact me at (505) 634-4209.

Reshectfully submitted

Holly C Perkins EH&S Specialist

Encl Williams Production Pit Inventory List (Federal wells)

San Juan Basin New Mexico Assets Below-Grade Tank Closure Plai

cc Environmental File

Below Grade Tank Removal
Closure Plan

to accordance with Rule 19.15.17.13 NMAC the following plan describes the general closure requirements of below grade tanks (BG1) on Williams Production Co. LLC. (WEX) locations in the San Juan Basin of New Mexico. This is WPX's standard closure procedure for all BG1s regulated under Rule 19.15.17 NMAC and operated by WEX. For those closures which do not conform to this standard closure plan a separate well/pit specific closure plan will be developed and utilized.

Closure Conditions and Timing:

Pursuant to 19.15.17.13 (A) NMAC. WFX will initiate closure of any BGJ should any one of these conditions occur.

- The Division requires closure because of imminent danger to fresh water public health or the environment
- The integrity of the BGT fails. Notification will be within 48 hours to the Division and closure will be schedule as specified in 19.15.17.12 (A)(5) NMAC.
- WPX chooses to take the BGT out of service due to operational needs. Closure under these conditions will be closed within 60 days of cessation of the BGT's operation.
- BGIs installed prior to June 16, 2008 that do not meet the requirements under 19, 15, 17, 11, 1(6).
 HMAC, and WPX chooses not to retrolit or upgrade. Closure under these conditions will be completed within five years (by June 16, 2013).

General Plan Requirements:

- Prior to initiating any BGT Closure except in the case of an emergency. WfX will review County Tax Records for the current surface owner of record. The surface owner of record will be notified of the intent to close the BGT by certified mail and a copy of this notification will be included in the closure report. In the case of an emergency, the surface owner of record will be notified as soon as practical.
- Notice of Closure will be given to the Aztec District office between 72 hours and one week of the scheduled closure via email or phone. The notification of closure will include the following
 - a Operators Name (WPX)
 - b. Well Name and API Number
 - c Location (USTR)
- All piping will be rerouted to an alternative produced water storage/disposal location (e.g. surface tanks temporary fractions...) The well will be temporarily shut in until the rerouting is completed.
- All produced water will be removed from the BGT following discharge pipe rerouting Produced water will be disposed at one of the following NMOCD approved facilities depending on the proximity of the BGT site. Rosa Unit SWD #1 (Order SWD 916. APT 30.039-27055), Rosa Unit #94 (Order SWD 3RP 1003.0, APT 30.039.23035), Jillson Fed. SWD #001 (Order R10168/R10168A. APT 30-039.25465). Middle Mesa SWD #001 (Order SWD 350.0. APT 30.045.27004), and/or Basin Disposal (Permit. NM.01-0005).

Solids and sludges will be shoveled and 701 vacuumed out for disposal at Envirotech (Fermit Number 19M ()). O()

Why will obtain prior approval from HMOC bits of specific recycle recise of reclaim the BC3 and provide documentation of the disposition of the bC-1 in the closure report. Stee materials will be recycled or reused as approved by the Division. Theregass tanks will be empty, currup or shielded, and EFA cleaned for also osal as solio waste. Their materials will

tooks and liner materials will meet the conditions of paragraph 1 subsection D of 19.15.5.42. NMAC—Disposal will be at a licensed disposal facility presently San Juan Regional Landfill operated by Waste Management under NMED Lemit SWM 052426.

- Any equipment associated with the BGT that is no longer required for some other purpose following the closure will be removed from the location
- 6 Following removal of the tank and any liner material, a five point composite sample will be taken of the excavation and tested per 19.15.17.13(F)(4) NMAC as identified in Table 1. Grab samples will be collected from any area that is wet, discolored or showing other evidence of a release. Results will be report to the Division following receipt from the lab on Form C. 141.

Table 1 Closure Citlena for BG1s

	TOOLS TO GLOVE COLORS									
į	Components	Testing Methods	Closure Limits (mg/Kg)							
	Benzene	EPA SW-846 Melhod 8021B or 8260B	: 0.2							
	BIEX	EPA SW 846 Method 8021B or 8260B	50							
	ारम	EPA 5W-846 Method 418,100	100							
	Chlorides	EPA SW 846 Method 300 111	2500							

^{*} Method modified for solid waste

- If the Division and/or WPX determine there is a release. WPX will comply with 19.15.3.117. LIMAC and 19.15.1.19 NMAC.
- Upon completion of the tank removal, the excavation will be backfilled with non-waste earthen material compacted and covered with a minimum of one foot of top soil or background thickness whichever is greater and to existing grade. The surface will be recontoured to match the native grade and prevent ponding.
- for those portions of the former pit area no longer required for production activities. WPX will seed the disturbed areas the first growing season after the pit is covered. Seeding will be accomplished via diffing on the contour whenever practical or by other Division approved methods. Vegetative cover will equal 70% of the native perennial vegetative cover (un impacted) consisting of at least three native plant species including at least one grass but not including noxious weeds, and maintained that cover through two successive growing veasons. Repeat seeding or planting will be continued until successful vegetative growth occurs. Note It a surface owner agreement requires reseeding or other surface restaration that do not meet re-vegetation requirements at 19-15-17,13 LIMAC then WPA will submit the proposed alternative with written documentation that the surface owner agrees to the alternative for Division approval.
- For those portions of the former pit area required for production activities reseeding will be done at well abandonment, and following the procedure noted above

Closure Report

All closure activities will include proper accumentation and will be submitted to OCD within 60 days of the BGI closure at a Closure keroat using Division Form C-144. The Report will include the following

- From the loging benchmark to the particular transfer and transfer and
- · Packhima & Cove mara a
- · SHE Induran we communities
- · Avoilable instruction (i.e.)

- Continuation Sampling Prairie of Festing
- · Euspasolf Jamil transfer and Lemma transfers
- · Application have 8 seems a technique
- Ehoto focumentanch of Fectionores

If background can, entration of Chloriaes presidenthan 250 mg/Fq. then higher concentration with boused for closure.

WELLS W/FEDERAL SURF MGT	API	FMT	SEC	TWN	RNG	PIT TYPE	CONSTRUCTION MATERIAL
	<u> </u>	- 1					
COX CANYON UNIT #001	3004511397	BLANCO MV	16N	32N	1177	BG1	DBL WALL STEEL FIBERGLASS TANK w/BANDED 20 mil
COX CANYON UNIT #001A	300452208G	BLANCO MV	160	32N	11VV	BG1	HIDPE SECONDARY LINER
CON CANNON HINIT HOUSE	1004F 20 70 1	BLANCO MV	1 (2)	2011	1.1167	u C T	FIBERGLASS TANK W/BANDED 20 mill HDPE SECONDARY LINER
COX CANYON UNIT #001B	3004530791	BLANCO MV	161	32N	11W	BG1	THE SECONDARY LINER
COX CANYON UNIT #001C	3004532023	BI ANCO MA	16E	32N	11W	BG1	DBL WALL STEEL
COX CANYON UNIT #003	3004511495	BI ANCO MV	91	32N	1 1 VV	BGT	FIBERGLASS TANK W/BANDED 20 mil HDPE SECONDARY LINER
CONTRACTOR CONTRACTOR	000 4500000	DU ANICO NAV	(UD)	D. Falk 1		0.01	INDI MALL CIELI
COX CANYON UNIT #003A	3004522088	BI ANCO MV	9P	32N	11Vv	BG1	DBI WALL STEEL
COX CANYON UNIT #003B	3004530871	BI ANCO MV	93	32N	11W	BGT	DBI WALL STEEL
COX CANYON UNIT #004	3004511368	BLANCO MV	21A	32N	11W	BG1	DBI WALI STEEL
		D) 11100 1111	5.5			561	SOLVANIA OTER
COX CANYON UNIT #004A	3004522093	BI ANCO MV	21P	32N	11W	BG1	DBL WALL STEEL
COX CANYON UNIT #004B	3004532186	BLANCO MV	211	32N	11W	BG1	DBI WALL STEEL
COX CANYON UNIT #005	3004511326	BI ANCO MV	21K	32N	1 1 Vv	BGI	DBI WALL STEEL
COX CANYON UNIT #005A	20046.22004	BLANCO MV	21D	32N	1 1 V V	BG1	DBI WALL STEEL
COX CANTON ONLI #000A	3004522094	BASIN UK /	2117	32IV	1100	601	DEL WALL STELL
COX CANYON UNIT #005B	3004532142	BI ANCO MV	21N	32N	11W	BG1	DBL WALL STEEL
COX CANYON UNIT #005C	3004533493	BLANCO MV	21F	32N	11W	BG1	DBL WALL STEEL
COX CANYON UNIT #006	3004511463	BLANCO MV	16A	32N	11W	BGT	DBI WALL STEEL
SON CANTON ONLY #000	3004311403	DI ANTOO MIC	IOA	5211	1144	001	DBC WAR STEEL
A900# TINU NOYNAD XOC	3004522095	BLANCO MV	161	3214	11W	BG1	DBL WALL STEEL
COX CANYON UNIT #006B	3004532693	BLANCO MV	16B	32N	11W	BGT	DBL WALL STEEL - 2
COX CANYON UNIT #006C	3004532733	BLANCO MV	16O	32N	1177	BG1	DBI WALL STEEL
OX CANYON UNIT #007	3004511455	PL ANCO MA	176	32N	11W	FGP	DBI WALL STEEL
OX CANYON UNIT #007A	3004522091	BLANCO MV	170	32N	11W	BG1	DBI WALL STEEL
OX CANYON UNIT #007C	3004533018	BASIN DK	17K	32N	11W	BG1	DBI WALI STEEL
							FIBERGLASS TANK W/BANDED 20-nul
OX CANYON UNIT #008	3004511492	BLANCO MV	81	32N	11W	BG1	HDPE SECONDARY LINER
OX CANYON UNIT #008A	3004522096	BLANCO MV	17H	32N	11W		DBL WALL STEEL
OX CANYON UNIT #008B	3004532080	BLANCO MV	8P	32N	11W		FIBERGLASS TANK w/BANDED 20 mil HDPE SECONDARY LINER
							FIBERGI ASS TANK w/BANDED 20-mil
OX CANYON UNIT #008C OX CANYON UNIT #009A	3004531187	BLANCO MV	17F)	32N	11W		HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
OM	3004522092	BLANCO MV	20D	32N	11W		HDPE SECONDARY LINER
OX CANYON UNIT #009B	3004533926	BASIN DK / BLANCO MV	20B	32N	11W	BG1	DBL WALL STEEL
O1VI	JU04003820	BASIN DK /	200	ULIY	, 1 7 7	501	DOL TIME VIELL
2600# LINN NOANS XC	3003933851	BLANCO MV	20E	32N	11W		DBL WALL STEEL FIBERGLASS TANK W/BANDED 20-mil
JA CANYON UNIT #013	3004521489	BLANCO PC	20A	32N	11W		HDPE SECONDARY LINER

WELLS W/FEDERAL SURF MGT	API	FMI	SEC	ושא	PNC	PIT TYPE	CONSTRUCTION MATERIAL
COX CANYON UNIT #023	AFI		SEC	1 4414	KIVG	FILLIFE	FIBERGLASS TANK w/BANDED 20-mil
COM	3004522537	BLANCOPC	170	32N	1 1 V V	BG1	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20 mil
COX CANYON UNIT #025	3004522572	BLANCO PC	90	32N	111//	BGT	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
COX CANYON UNIT #200	3004527878	BASINFTC	91	32N	11W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
COX CANYON UNIT #200A	3004532126	BASIN FTC	9O	32N ,	11W	BGI	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20 mil
COX CANYON UNIT #203	3004527872	BASIN FIC	17A	32N	11W	BGT	HDPE SECONDARY LINER
MADDOX #001	3004511487	BLANCO MV	10N	32N	11W	BG7	DBI WALL STEEL
MADDOX #001A	3004523539	BLANCO MV	10P	32N	11W	BGI	DBI WALL STEEL
NM 32 11 #001	3004511309	BLANCO MV BASIN DK /	200	32N	11W	BG1	DBL WALL STEEL
NM 32 11 #001B COM	3004532024	BLANCO MV BASIN DK /	20J	32N	1 1 VV	BGT	DBL WALL STEEL
NM 32 11 #001C COM	3004532804	BI ANCO MV	201	32N	11W	BG1	DBL WALL STEEL FIBERGLASS TANK wBANDE() 20 mil
NM 32-11 #002 COM	3004511380	BLANCO MV	19A	32N	11W	BGT	HDPE SECONDARY LINER
NM 32 11 #002A COM	3004529017	BLANCO MV	190	32N	11W	BG7	DBI WALL STEEL
NM 32-11 #0028 COM	3004532670	BLANCO MV	191	32N	11W	BGT	DBL WALL STEEL
NM 32 11 #002C COM	3004533077	BLANCO MV	19G	32N	11W	BG1	DBL WALL STEEL
ROSA UNIT #001 SWI)	3003927055	SWD BASIN DK /	231	31N	06W	BGI	DBI WALL STEEL FIBERGLASS TANK WBANDED 20-mil
ROSA UNIT #001E	3003925411	BLANCO MV BLANCO MV	11P	31N	061/	BG1	HDPE SECONDARY LINER
ROSA UNIT #005A	3003925407	ROSA PC BASIN DK /	26P	31N	06W	BG1	DBI WALL STEEL
OSA UNIT #005B	3003926927	BI ANCO MV	26B	3111	06W	BG1	DBL WALL STEEL FIBERGLASS TANK w/BANDED 20 mil
OSA UNIT #005Y	3003926076	BLANCO MV BLANCO MV /	26H	31N	06\V		HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20 mil
OSA UNIT #008	3003907944	ROSA PC BLANCO MV /	26M	31N	OGW	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
OSA UNIT #00B	3003907944	ROSA PC BLANCO MV /	26M	31N	06W		HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20 mil
A800# 11/NU ARC	3003925430	ROSA PC	26D	31N	,06W	BGT	HDPE SECONDARY LINER FIBERGLASS TANK WIBANDED 20 mil
OSA UNIT #008C	3003926944	BI ANCO MV	26N	31N	06W	BGT	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20 mil
900# TINU A20	3003907975	BLANCO MV BASIN DK /	-11K	31N	06W		HDPE SECONDARY LINER
APOUNT #009A	3003925584	BLANCO MV	11C	31N	06W		DBL WALL STEEL FIBERGLASS TANK w/BANDED 20-mil
PSA UNIT #009B	3003927042	BLANCO MV	11E	31N	06W	BGT	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
SA UNIT #010B	3003926556	BLANCO MV	13N	31N	06 V V		HDPE SECONDARY LINER
SA UNIT #010C	3003926918	BI ANCO MV	13N	31N	06W	BGT	DBL WALL STEEL
5A UNIT #0100	3003926556	BLANCO MV	13N	31N	06W	BG1	DBL WALL STEEL

.

WELLS WIFEDERAL							
SURF MGT	API	FM1 BLANCO MV /	SEC	TWN	RNG	PIT TYP	E CONSTRUCTION MATERIAL
ROSA UNIT #012A	3003925900	ROSA PC BASIN DK /	15J	31N	06W	PG1	DBL WALL STEEL FIBERGLASS TANK WBANDED 20 mil
ROSA UNIT #012B	3003926555	BI ANCO MV	15F	3111	0677	BG1	HDPF SECONDARY LINER
ROSA UNIT #012C	3003929486	BI ANCO MV	15A	31N	OGVV	5(,)	SINGLE WALL STEEL LIBERGLASS TANK WBANDED 20 mil
ROSA UNIT #013	3003907936	BLANCO MV	31G	3114	05Vv	BG1	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20 mil
ROSA UNIT #013A	3003926298	BLANCO MV BASIN DK /	311	31N	U5W	BGT	HDPE SECONDARY LINER
ROSA UNIT #013B COM	3003929834	BLANCO MV	31A	31N	05Vv	BGI	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #014	3003907958	BLANCO MV	23B	31N	W80	BG1	HDPE SECONDARY LINER FIBERGLASS TANK w/BANDED 20 mil
ROSA UNIT #014A	3003926280	BLANCO MV BASIN DK /	23P	31N	06W	BG1	HDPE SECONDARY LINER
ROSA UNIT #014(.	3003930132	BLANCO MV	23H	31N	06W	BGI	DBI WALL STEEL FIBERGLASS LANK W/BANDED 20 mil
ROSA UNIT #015	3003907946	BI ANCO MV	2911	31N	05W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #016	3003907963	BLANCO MV	14N	31N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #016A	3003925496	BLANCO MV	14C	31N	()6VV	BGT	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20-mil
ROSA UNIT #016B	3003926218	BLANCO MV	14M	31N	06W	BGI	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #017A	3003926272	BLANCO MV BASIN DK /	200	31N	05W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #017B	3003926971	BLANCO MV BLANCO MV	20J	31N	05W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #018	3003907960	ROSA PC BLANCO MV	22H	31N	06W	BG1	HDPE SECONDARY LINER
ROSA UNIT #018A	3003925436	ROSA PC	22P	31N	06VV	SG1	DBI WALL STEEL
IOSA UNIT #018B	3003927052	BLANCO MV	3 2O	31N	06W	BGI	DBI WALL STEEL FIBERGLASS TANK W/BANDED 20-mil
'OSA UNII #019	3003907955	BI ANCO MV	24K	31N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20-mil
OSA UNIT #019B	3003926560	BI ANCO MV	241	31N	06W	BG1	HDPE SECONDARY LINER
OSA UNIT #019C	3003929625	BLANCO MV	24D	31N	06W	BG1	DBI WALL STEEL
OSA UNIT #019C	3003929625	BL ANCO MV	24D	31N	06W	BG1	DBL WALL STEEL FIBERGLASS TANK w/BANDED 20 mil
OSA UNIT #020	3003907969	BL ANCO MV	14G	31N	06W	RG1	HDPE SECONDARY LINER FIBERGLASS TANK w/BANDED 20 mil
A020# TINU A2C	3003925495	BLANCO MV	140	31N	06W	BG1	HDPE SECONDARY LINER
)SA UNIT #020B	3003926220	BI ANCO MV	14A	31N	06W	BG1	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20 mil
OSA UNIT #020C	3003926221	BLANCO MV	14J	31N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
)SA UNIT #021A	3003926121	BLANCO MV	23C	31N	06W	BG1	HDPE SECONDARY LINER
)SA UNIT #021B	3003926554	BLANCO MV	23K	31N	06W	BGT	DBL WALL STEEL
)SA UNI1 #02 [‡]	3003907971	BLANCO MV	18A	31N	05W	BG7	FIBERGLASS TANK W/BANDED 20-mil HDPE SECONDARY LINER

WELLS W/FEDERAL SURF MGT	API	FMT	SEC	TWN	PNG	PIT TYPE	CONSTRUCTION MATERIAL
SURF MOT	Arı	L. IAI I	SEC	IVVIN	KNG	FII I I I I	FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #022A	3003926390	BI ANCO MV	18C	3110	0577	BGT	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20 mil
ROSA UNIT #023	3003907942	BI ANCO MV	29M	31N	05W	BG1	HDPE SECONDARY LINER LIBERGLASS TANK WBANDED 20 mil
ROSA UNIT #023B	3003926553	BLANCO MV BASIN DK /	29F	31N	05W	BGI	HDPE SECONDARY LINER FIBERGLASS TANK WBANDFD 20 mil
ROSA UNIT #0230	3003927609	BI ANCO MV	291	31N	05W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDE() 20 mil
ROSA UNIT #024	3003907933	BLANCO MV BASIN DK /	32M	31N	05W	BGI	HDPE SECONDARY LINER
ROSA UNIT #024A	3003925568	BLANCO MV BASIN DK /	32E	31N	05W	SG1	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #024B	300 392 6630	BLANCO MV BASIN DK /	32N	31N	05W	BG1	HDPE SECONDARY LINER FIBERGLASS JANK WBANDED 20 mil
ROSA UNIT #024(.	3003926968	BLANCO MV BASIN DK /	32C	31N	05W	BG1	HDPE SECONDARY LINER
ROSA UNIT #026A	3003925580	BI ANCO MV	320	31N	05W	SG1	DBI WALL STEEL
ROSA UNIT #026B	3003926788	BASIN DK	32G	31N	05W	SG1	DBL WALL STEEL FIBERGLASS TANK w/BANDED 20 mil
ROSA UNIT #029	3004511136	BLANCO MV BASIN DK /	32H	32N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK w/BANDED 20 mil
POSA UNIT #029B	3004530709	BLANCO MV BASIN DK /	32B	32N	06W	BGT	HDPE SECONDARY LINER
ROSA UNIT #029M	3004529584	BLANCO MV BASIN DK /	321	32N	06W	BG1	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20 mit
ROSA UNIT #030 COM	3003925570	BLANCO MV	12O	31N	VV90	BG1	HDPE SECONDARY LINER FIBERGLASS TANK w/BANDED 20-mil
ROSA UNIT #030A	3003926068	BLANCO MV	12M	31N	06W	BGI	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #0.30B	3003926601	BLANCO MV	1211	31N	06W	BG1	HDPE SECONDARY LINER
ROSA UNIT #030C	3003929842	BLANCO MV	1212	31N	06W		DBL WALL STEEL FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #031	3003926279	BI ANCO MV	17C	31N	05VV		HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
ALEO# TIMU AZOS	3003926346	BLANCO MV BASIN DK /	171	31N	05W		HDPE SECONDARY LINER FIBERGLASS TANK W/BANDFD 20 mil
ROSA UNIT #031B	3003926579	BI ANCO MV	17[)	31N	05W		HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
IOSA UNIT #031C	3003926578	BLANCO MV BLANCO MV /	17tN	31N	()5W	BG1	HDPE SECONDARY LINER
OSA UNIT #032	3003925389	ROSA PC BLANCO MV /	2111	31N	06W	BG1	DBL WALL STEEL
OSA UNIT #032A	3003925417	ROSA PC BASIN DK /	21F	31N	06W		DBL WALL STEEL FIBERGLASS TANK w/BANDED 20-mil
OSA UNIT #032B	3003926771	BLANCO MV BASIN DK /	21G	31N	06W		HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
OSA UNIT #032C	3003927240	BLANCO MV	21F	31N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20-mil
DSA UNIT #034	3003907984	BLANCO MV	36B	32N	06W		HDPE SECONDARY LINER
OSA UNIT #034A	3003926119	BLANCO MV	361	32N	06W	BGT	DBL WALL STEEL
DSA UNIT #034A	3003926119	BLANCO MV	361	32N	06W		DBL WALL STEEL FIBERGLASS TANK w/BANDED 20-mil
)SA UNT #034E	3003926629	BLANCO MV	36J	32N	U6W		HDPE SECONDARY LINER

and the second of the second control of the

. WELLS W/FEDERAL SURF MGT	API	FMT	SEC	TWN	RNG	PIT TYPE	
The same of the sa				·			FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #0340	3003926969	BI ANCO MV	3611	32N	06W	BG1	HDPE SECONDARY LINER
ROSA UNIT #035X	3004510996	BLANCO MV	5K	31N	0674	BG1	DBI WALL STEEL FIBERGLASS TANK W/BANDE() 20 mil
ROSA UNIT #036	3003907977	BLANCO MV	1 111	31N	0674	BG1	HDPE SECONDARY LINER LIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #0360	3003930182	BLANCO MV	116	31N	06W	BGT	HDPE SECONDARY LINER
ROSA UNIT #041	3003907981	BLANCO MV	5K	31N	05Vv	BG1	FIBERGLASS TANK w/BANDFD 20 mil HDPE SECONDARY LINER
ROSA UNIT #041B	3003927014	BASIN DK / BLANCO MV	6P	31N	05VV	BG1	FIBERGLASS TANK WBANDED 20 mil HDPE SECONDARY LINER
ROSA UNI1 #044	3003925873	BI ANCO MV	35K	32N	06W	BG1	DBI WALI STEEL
ROSA UNIT #044A	3003926161	BI ANCO MV	35E	32N	06W	SGI	SINGLE WALL STEEL
ROSA UNIT #044A	3003926161	BI ANCO MV	35E	32N	06VV		DBI WALL STEEL
ROSA UNIT #044B	3003926685	BI ANCO MV	35C	32N	0677	BG1	FIBERGLASŞ TANK W/BANDFD 20 mil HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
ROSA UNII #045	3003923013	BLANCO MV BASIN DK /	9M	31N	05W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #046A	3003926986	BI ANCO MV	80	3114	05W		HDPE SECONDARY LINER
ROSA UNIT #051	3003920289	BASIN DK	23C	31N	06Vv		DBL WALL STEEL FIBERGLASS TANK w/BANDFD 20-mil
ROSA UNIT #053	3003920293	BASIN DK	8B	31N	05W	BGT	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20 mil
ROSA UNIT #055	3003920923	BASIN DK	341	31N	()5VV		HDPE SECONDARY LINER
ROSA UNIT #059 DK	3003923270	BASIN DK	25N	31N	06W		DBL WALL STEEL FIBERGLASS TANK w/BANDED 20 mil
ROSA UNIT #059 GL	3003923270	UNDES GL	25N	31N	W90	BG1	HDPE SECONDARY LÍNER FIBERGLASS TANK W/BANDED 20-mil
305A UNIT #060	3004529798	BLANCO MV	41	31N	0674		HDPE SECONDARY LINER
ROSA UNIT #064	3003921703	BASIN DK	29A	31N	05W	BG1	DBI WALI STEEL
ROSA UNIT #064	3003921703	BASIN DK BASIN DK /	29A	31N	05W	SGI	DBI WALL STEEL
OSA UNIT #064M	3003925563	BLANCO MV	29f	31N	05W		DBL WALL STEEL FIBERGLASS TANK WBANDED 20-mil
:OSA UNIT #065	3003921702	BASIN DK	17A	31N	05W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
OSA UNIT #066	3003921758	BASIN DK BASIN DK /	13L	31N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
OSA UNIT #066M	3003925747	BI ANCO MV	13F	31N	06W	BGT	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
OSA UNIT #072	3003925509	BLANCO MV	61	31N	05W	BGT	HDPE SECONDARY LINER
OSA UNIT #072A	3003925795	BI ANCO MV	6K	31N	05W	BG1	FIBERGLASS TANK W/BANDED 20 mil HDPE SECONDARY LINER
OSA UNIT #075	3004529895	BLANCO MV	10l	31N	06W	BGT	FIBERGLASS TANK W/BANDED 20-mil HDPE SECONDARY LINER
OSA UNIT #075A	3004529854	BLANCO MV	40	31N	06W	BGT	FIBERGLASS TANK W/BANDED 20-mil HDPE SECONDARY LINER
)SA UNI1 #07 -	3003922538	DK/UNDES GL/BLANCO	33L	31N	05W		FIBERGLASS TANK W/BANDED 20-mil HDPE SECONDARY LINER

. WELLS WIFEDERAL							
SURF MGT	API	FM1	SEC	TWN	RNG	PIT TYPE	CONSTRUCTION MATERIAL
ROSA UNIT #079	3003922539	BASIN DK / BLANCO MV BASIN DK /	22K	3111	()6W	BG1	DBL WALL STEEL
ROSA UNII #079	3003922539	BLANCO MV	22K	3110	06W	SG1	DBI WALL STEFF
ROSA UNIT #079A	3003925412	ROSA PC BASIN DK /	554	31N	υ6₩	BG1	DBI WALL STEFF
ROSA UNIT #079B	3003926920	BI ANCO MV	22C	31N	06Vv	BGT	DBL WALL STEEL
ROSA UNIT #079C	3003929902	BLANCO MV BASIN DK /	31P	31N	05W	BG1	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20 mil
ROSA UNII #080	3003922537	BI ANCO MV	8K	31N	05W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK w/BANDED 20-mil
ROSA UNIT #080A	3003926413	BLANCO MV	8f	31N	05W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #085	3003922778	BASIN DK	20A	31N	05W	BG1	HDPE SECONDARY LINER LIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #085	3003922778	BLANCO MV	20A	31N	05W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #085A	3003926314	BI ANCO MV	200	31N	05W	BG1	HDPE SECONDARY LINER
ROSA UNIT #085P	3003930130	BI ANCO MV	20D	31N	05W	BG1	DBI WALL STEEL
ROSA UNIT #086	3003922766	UNDES GI BLANCO MV /	12W	31N	()4W	SG1	SINGLE WALL STEEL
ROSA UNIT #088	3004525140	ROSA PC	48	31N	06W	BGI	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #089	3003922782	BI ANCO MV	34A	32N	06W	BGT	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #089A	3003925512	BLANCO MV	34()	32N	06VV	BGT	HDPE SECONDARY LINER
:OSA UNIT #089B	3003926851	BLANCO MV	341	3214	0677	BG1	DBI WALI STEEL
OSA UNIT #089C	3003926674	BI ANCO MV	34G	3214	06W	SG1	SINGLE WALL STEEL FIBERGLASS TANK W/BANDED 20 mil
OSA UNIT #090 COM	3004525370	BLANCO MV	33G	3214	06W	BG1	HDPE SECONDARY LINER
OSA UNIT #090A COM	3004529259	BLANCO MV	33G	32N	06\V	BG1	DBL WALE STEEL FIBERGLASS TANK w/BANDED 20 mil
190# TINU ASC	3003922780	BI ANCO MV	3511	32N	06W	BG1	HDPE SECONDARY LINER
A190# FINU ASC	3003925790	BLANCO MV -	35O	32N	06VV	SGT	DBL WALL STEEL
DSA UNIT #091B	3003926684	BI ANCO MV	35P	32N	06W	BGT	DBL WALL STEEL FIBERGLASS TANK w/BANDED 20 mil
)SA UNIT #091C	3003926991	BI ANCO MV	35G	32N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
198 UNIT #098	3003923265	BASIN DK / GI BASIN DK /	231	31N	06W	BG1	HDPE SECONDARY LINER
SA UNIT #100B	3003929547	BLANCO MV	210	31N	06W	BGT	DBL WALL STEEL
SA UNIT #100C	3003929851	BLANCO MV BLANCO MV /	21K	31N	06W	BG1	DBL WALL STEEL
SA UNIT #100E	3003925135	ROSA PC	211	31N	u6W	SG1	SINGLE WALL STEEL
SA UNIT #101M	3003925577	BI ANCO MV	24F	31N	06W	BGT	DBL WALL STEEL FIBERGLASS TANK w/BANDED 20-mil
3A UNIT #10E	3003923506	BASIN DK / GL	7G	3111	05W	BG1	HDPE SECONDARY LINER

WELLS W/FEDERAL SURF MG1	API	FMT	SEC	TWN	RNG	PIT TYPI	CONSTRUCTION MATERIAL
ROSA UNIT #119	3003925143	BASIN DK	18N	31N	05Vv	BG1	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #125	3003925144	BLANCO MV	13B	31N	06∀√	BG1	HDPE SECONDARY LINER
ROSA UNIT #1250	3003929843	BLANCO MV BASIN DK /	13G	31N	06W	BG1	DRUWALL STEEL FIBERGLASS LANK W/BANDED 20 mil
ROSA UNIT #125E	3003925526	BI ANCO MV	13./	31N	06W	BGI	HDPE SECONDARY LINER
ROSA UNIT #129	3003926304	BLANCO MV	34E	32N	0677	BG1	DBI WALL STEEL
ROSA UNIT #129A	3003926297	BLANCO MV	34K	3211	W8U	BGT	DBL WALL STEFT FIBERGLASS TANK w/BANDED 20 mil
ROSA UNIT #137	3003925410	BLANCO MV BLANCO MV /	31K	31N	05W	BG1	HDPE SECONDARY LINER
ROSA UNIT #137A	3003926129	ROSA PC	311	31N	05W	BG1	DBI WALL STEEL FIBERGLASS TANK w/BANDED 20 mil
ROSA UNIT #137B	3003927002	BLANCO MV BLANCO MV /	31P	31N	()5W	BGT	HDPE: SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #138	3004529147	ROSA PC BLANCO MV /	171	31N	06W	BGT	HDPE SECONDARY LINER
ROSA UNIT #138A	3004529134	ROSA PC	17H	311	06W	BG1,	DBI WALL STEEL
ROSA UNIT #138B	3004532168	BLANCO MV	1711	31N	W6W	BGT	DBI WALL STEEL
ROSA UNIT #139A	3004529600	BLANCO MV	17M	31N	06W	BG1	DBI WALL STEEL
ROSA UNIT #140	3003925435	ROSA PC	22K	31N	06W	BG1	DBL WALL STEEL
ROSA UNIT #144	3003925421	ROSA PC	26A	31N	06W	BG1	DBI WALL STEEL
ROSA UNIT #145C	3004533086	BLANCO MV	16F	31N	06W	BG1	DBI WALL STEEL
≀OSA UNIT #146A	3003925513	BI ANCO MV	28N	31N	05W	BG1	HDPE SECONDARY LINER
OSA UNII #146C	3003930187	BLANCO MV	28B	3111	05W	BG1	DBI WALL STEEL
OSA UNIT #148	3003925493	BASIN DK	20	31N	06W	BG1	DBI WALL STEFL
OSA UNIT #148A	3003925776	BI ANCO MV	2N	31N	06W	BG1	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20-mil
OSA UNIT #148B	3003926985	BLANCO MV	2P	31N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
OSA UNIT #149	3003925501	BI ANCO MV	12G	31N	06W	BG1	HDPE SECONDARY LINER
APP TINU ASC	3003925807	BLANCO MV BASIN DK /	121	31N	06VV	BG1	DBI WALL STEEL FIBERGLASS TANK w/BANDED 20-mil
OSA UNIT #149B	3003926599	BLANCO MV	12E	31N	06W	BG1	HDPE SECONDARY LINER
)SA UNIT #150	3004529229	BLANCO MV	32F	32N	06W	BGT	FIBERGLASS TANK W/BANDED 20-mil HDPE SECONDARY LINFR
OSA UNIT #150A	3004529592	BLANCO MV	32M	32N	06W	BG1	DBI WALL STEEL
)SA UNIT #150B	3004530874	BASIN DK / BLANCO MV	32D	32N	06W	BG1	DBL WALL STEEL
)SA UNIT #15(1(3004532157	BLANCO MV	32K	32N	W80	BG1	DBI WALL STEEL
SA UNIT #15	3004529267	BLANCO MV	33C	32N	06W	BG1	DBL WALL STEEL

SURF MG1	API	FMT	SEC	TWN.	RNG	PIT TYPE	CONSTRUCTION MATERIAL
ROSA UNIT #151A	3004529631	BLANCO MV	331	32N	06W	BGI	UBL WALL STEEL
ROSA UNIT #151C	3004532196	BI ANCO MV	33N	32N	06W	BG1	DBL WALL STEEL
ROSA UNIT #152	3003925494	BLANCO MV	36E	32N	06W	BGI	FIBERGLASS TANK W/BANDE () 20 n HDPE SECONDARY LINER
ROSA UNIT #152A	3003925695	BI ANCO MV	36N	32N	t)6W	BG1	DBI WALI STEEL
ROSA UNIT #152B	3003926631	BI ANCO MV	36C	32N	06W	BG1	DBL WALL STEEL
ROSA UNIT #152C	3003927635	BI ANCO MV	361	32N	06W	BG1	FIBERGLASS TANK W/BANDED 20 n HDPE SECONDARY LINER
ROSA UNIT #153	3003925524	BI ANCO MV	170	31N	05W	BG1	FIBERGLASS TANK W/BANDED 20-11 HDPE SECONDARY LINER
7666 4 4 4 4 7 4 4 6 6 4		D1 44100 4414					FIBERGLASS TANK W/BANDED 20-n
ROSA UNIT #153A	3003926329	BLANCO MV BASIN DK /	1/A	31N	05W	BGT	HDPE SECONDARY LINER FIBERGLASS TANK WIBANDED 20-M
ROSA UNIT #153B	3003927603	BI ANCO MV	171	31N	05W	BG1	HDPE SECONDARY LINER
ROSA UNIT #154	3003925893	BLANCO MV	7N	31N	05VV	BGT	DBL WALL STEEL
ROSA UNIT #154A	3003926274	BI ANCO MV	7P	3110	05W	BG1	FIBERGLASS TANK W/BANDED 20 n HDPE SECONDARY LINER
ROSA UNIT #156	3004529661	BI ANCO MV	9A	31N	06W	BG1	FIBERGLASS TANK WBANDED 20 n HDPE SECONDARY LINER
ROSA UNIT #156A	3004529640	BI ANCO MV	9)	31N	UbVV	BG1	FIBERGLASS TANK W/BANDED 20 n HDPE SECONDARY LINER
ROSA UNIT #159 COM	3003925583	BASIN DK / BI ANCO MV	190	31N	05W	BGI	DBL WALL STEEL
ROSA UNIT #159A	3003926273	BLANCO·MV	19N	31N	05Vv	BG1	FIBERGLASS TANK WBANDED 20 m HDPE SECONDARY LINER
ROSA UNIT #15C	3003930111	BI ANCO MV	296	31N	05VV	BG1	FIBERGLASS TANK WBANDED 20 m HDPE SECONDARY LINER :
ROSA UNIT #160	3003925890	BLANCO MV / ROSA PC	250	31N	06W	BGT	DBL WALL STEEL
ROSA UNIT #160A	3003925818	BI ANCO MV	25N	31N	U6W	BG1	DBI WALL STEEL
ROSA UNIT #160B	3003926962	BASIN DK / BI ANCO MV	251	31N	06W		FIBERGLASS TANK w/BAND§1) 20 m HDPE SECONDARY LINER
ROSA UNIT #160C	3003929778	BLANCO MV	25J	31N	06W	BG1	DBI WALL STEEL
ROSA UNIT #162	3003926069	BI ANCO MV	30K	31N	05W		FIBERGLASS TANK w/BANDED 20 m HDPE SECONDARY LINER
ROSA UNIT #162B	3003929845	BI ANCO MV	30P	31N	05W		DBL WALL STEEL
							FIBERGLASS TANK w/BANDED 20 m
'OSA UNIT #163	3003926345	BLANCO MV	24G	31N	06W		HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20-m
OSA UNIT #163A	3003926336	BLANC() MV	240	31N	W90	BG1	HDPF SECONDARY LINER
OSA UNIT #163B	3003929921	BI ANCO MV	24B	31N	06W	SGT	DBL WALL STEEL
OSA UNIT #163C	3003929611	BLANCO MV BASIN DK /	24J	31N	06W		SINGLE WALL STEEL FIBERGLASS TANK w/BANDED 20-m
PAPE TIVIU ARC	3003926151	BI ANCO MV	1 <i>J</i>	31N	06W	BGT	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-m
DSA UNIT #164A	3003926080	BLANCO MV	13	31N	06W	BGT	HDPE SECONDARY LINER
)\$4 UNIT #164E	3003927242	BASIN DK / BLANCO MV	1J	31N	06W		FIBERGLASS TANK w/BANDED 20 m HDPE SECONDARY LINER

WELLS W/FEDERAL SURF MG1	API	FM1	SEC	TWN	RNG	PIT TYPI	E CONSTRUCTION MATERIAL
ROSA UNIT #165	3003926070	BLANCO MV / ROSA PC	251	31N	06W	PG1	DBI WALL STEEL FIBERGLASS TANK WBANDED 20 mil
ROSA UNIT #165A	3003926150	BLANCO MV BASIN DK /	25B	31N	O6VV	BG1	HDFE SECONDARY LINER
ROSA UNIT #1658	3003926557	BLANCO MV BASIN DK /	25E	31N	06VV	BGT	DBI WALL STEFT
ROSA UNIT #1650	3003926961	BI ANCO MV	25G	31N	06VV	BG1	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #166	3003926275	BLANCO MV	30A	31N	05W	BGT	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #166A	3003926282	BI ANCO MV	30F	31N	05W	BGT	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #167A	3004529886	BLANCO MV	8A	31N	06W	BG1	HDPE SECONDARY LINER
ROSA UNIT #169	3003926130	BI ANCO MV	3J	31N	06W	BG1	DBI WALL STEEL
ROSA UNIT #169A	3003926149	BI ANCO MV	3J	31N	()6W	BG1	DBL WALL STEEL FIBERGLASS TANK w/BANDED 20-mil
ROSA UNIT #169C	3003927717	BLANCO MV	2M	3111	06W	BGI	HDPE SECONDARY LINER
ROSA UNIT #170	3003925851	BI ANCO MV	21N	31N	06W	BG1	DBI WALL STEEL
ROSA UNIT #171	3003926286	BLANCO MV	7G	3110	05W	BG1	DBL WALL STEEL FIBERGLASS TANK w/BANDED 20 mil
ROSA UNIT #171A	3003926389	BLANCO MV	7G	31N	05W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20 mil
ROSA UNII #171B	3003927013	BLANCO MV	6P	31N	05W	BG1	HDPE SECONDARY LINER LIBERGLASS TANK WBANDED 20 mil
ROSA UNIT #180	3004529898	BLANCO MV	9N	31N	06W	BGI	HDPE SECONDARY LINER
ROSA UNIT #180B	3004533134	BLANCO MV	91	3114	06W	BG1	DBI WALL STEEL
(OSA UNIT #1800)	3004533191	BLANCO MV	9E	31N	06W	BGT	DBI WALL STEEL
OSA UNIT #181	3003926463	BLANCO MV	11K	31N	06W	BG1	DBI WALL STEEL FIBERGLASS TANK WBANDED 20 mil
OSA UNIT #181A OSA UNIT #181C (shared	3003926312	BI ANCO MV	15A	31N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
/169C)	3003927714	BLANCO MV	2M	31N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20 mil
OSA UNIT #182	3003926283	BI ANCO MV	18N	31N	05W	BG1	HDPE SECONDARY LINER
OSA UNIT #182A	3003926285	BI ANCO MV	18P	31N	05W	BG1	DBI WALL STEEL
OSA UNIT #182C	3003930180	BI ANCO MV	18P	31N	05W	SG1	SINGLE WALL STEEL FIBERGLASS TANK w/BANDED 20-mil
281# TINU ARC	3003926387	BLANCO MV	19G	31N	05W	BG1	HDPE SECONDARY LINER
DSA UNIT #183A	3003926386	BI ANCO MV	19F	31N	05W		FIBERGLASS TANK W/BANDED 20 mil HDPE SECONDARY LINER
DSA UNIT #183B	3003930087	BI ANCO MV	19B	31N	05W	BG1	DBI WALI STEEL
)SA UNIT #185B	3004532734	BASIN DK / BLANCO MV	16F	31N	06W	BGT	DBL WALL STEEL
)SA UNIT #185C	3004534484	BLANCO MV	16F	31N	06W	BG1	DBL WALL STEEL
)\$A UNII #185	3003930186	BLANCO MV	21G	31N	05W	BG1	DBL WALL STEEL

WELLS W/FEDERAL							
SURF MG1	API	FMT	SEC	IWN	RNG	PIT TYPE	CONSTRUCTION MATERIAL
ROSA UNIT #231	3003924444	BASIN F1C	31N	31N	05W	SG1	SINGLE WALL STEEL
ROSA UNIT #335A	3003930222	BASIN F1C	05J	31N	05W	SG1	SINGLE WALL STEEL

.

:

Production Pit: Fiberglass Below-Grade Tank

Although these tanks have performed well to protect the public health, welfare and environment, in accordance with Rule 19.15.17.13.A (4) NMAC, Williams will removed all BGTs constructed of fiberglass by June 16, 2013. These tanks do not meet the construction/design standards specified in 19.15.17.11 (1-4). The following plans describes the general design and construction (D&C) and Operations and Maintenance (O&M)of these production pits used on Williams Production Co, LLC (WPX) locations in the San Juan Basin of New Mexico.

Design and Construction Plan

The pit is located as close as possible to the well and associated production/process equipment to minimize surface disturbance. The excavation bottom and sidewalls were compacted prior to installation of the pit. The BGT consisted of single-wall fiberglass tank following appropriate API and industry codes, placed in a 20-mil High-Strength Polyethylene resin (Permeability Rating – 0.041 USPerms), and the liner banded to the tanks. A 2" Sch-40 PVC riser was placed between the tank and liner as a leak-detection inspection port. See the attached Schematic and liner spec sheet. The pit is protected from runon by the construction of a compacted earthen berm. Fencing is constructed to protect livestock/wildlife as specified by the federal Surface Management Agency or, if not federal land/minerals requirements. WPX posts a well sign in accordance with the federal Surface Management Agency and rule 19.15.3.103.

Operations and Maintenance Plan

- 1. WPX only allows produced liquids meeting the RCRA exemption for O&G wastes to be stored in the SGT. WPX will not discharge or store any hazardous waste as defined under RCRA 40CFR 261 and 19.15.1.7.W(3) NMAC in any temporary pit. Produced water is disposed by evaporation or transport any of the following NMOCD approved facilities depending on the well location: Basin Disposal, Inc in Bloomfield, New Mexico (Permit # NM-01-005), Williams Rosa SWD#1 (Permit # SWD-916), Williams Rosa #94 (Permit # SWD-758), Burlington Resources Jillson SWD#1 (Permit #R10168A), or other NMOCD approved water disposal facilities. WPX maintains sufficient freeboard for to prevent overtopping. Discharges to the pit will be shutoff if the liquid level does not provided sufficient free-board and liquid removal can not be scheduled in a timely manner. Any oil or hydrocarbon collecting on the pit is removed. Saleable condensate is returned to the sales tank. Slop oil from compression is recycled with Safety Kleen, Farmington, NM or Hydropure, Aztec, NM (No Permit Required).
- 2. If the tank integrity is compromised:
 - a. All discharges will be shut off to the pit.
 - b. All liquids will be removed as soon as possible but no more that within 24 hours of discovery
 - c. WPX will notify and report to NMOCD as follows:
 - i. If the release is less than 25 bbls, the Aztec District Office by phone or email within 48-hours of discovery and repair.
 - ii. If the release is suspected to be greater than 25 bbls, the Aztec District Office and the Environmental Bureau Chief by phone for immediate verbal notification pursuant to 19.15.3.116.B (1)(d).
 - d. Written Spill/Release reports will be submitted on Form C-141 per 19.15.3.116.C NMAC within 15 days to the Aztec District Office.
- 3. Berms around the perimeter of the pit, shall be maintained as protection from run-on.
- 4. WPX will inspect the BGT pit monthly. Electronic copies of the inspections will be kept at the WPX San Juan Basin office for a minimum of five years following completion. Copies of the inspections will be available to NMOCD upon request.

Production Pit: Below-Grade Tank
Closure Plan

In accordance with Rule 19.15.17.13 NMAC, the following plan describes the general closure requirements of below-grade tanks (BGT) on Williams Production Co, LLC (WPX) locations in the San Juan Basin of New Mexico. This is WPX's standard procedure for all out-of-service BGTs used to store produced liquids during production operations at gas wells operated by WPX.

For those closures which do not conform to this standard closure plan, a separate well/pit specific closure plan will be developed and utilized. All closure activities will include proper documentation and will be submitted to OCD within 60 days of the pit closure on a Closure Report using Division Form C-144. The Report will include the following:

- Plot Plan (Pit Diagram)
- Available Inspection reports

- Sampling Results
- Waste disposal documentation

General Plan Requirements:

- 1. All piping will be rerouted to an alternative produced water storage/disposal location (e.g. surface tanks, temporary frac tank ...). The well will be temporarily shut in until the rerouting is completed.
- 2. All produced water will be removed from the BGT following discharge-pipe rerouting. Produced water will be disposed of by injection at one of the Williams Production Rosa Unit Salt Water Disposal wells: Rosa SWD #1 (API: 30-039-27055) I-23-31N-06W Permit SWD-916 or Rosa Unit #94 (API: 30-039-23035) K-16-31N-05W, Permit SWD-758.
- 3. Notice of Closure will be given to the landowner or SMA, and the Aztec District office between 72 hours and one week of the scheduled closure via email or phone. The notification of closure will include the following:
 - a. Operators Name (WPX)
 - b. Well Name and API Number
 - c. Location (USTR)
- 4. The BGT and all associated materials will be removed, and recycled, reused, or disposed. of in a Division-approved facility. All materials that can not be recycled or reused will be treated a solid waste and will be disposed of at a licensed disposal facility (probably San Juan Regional Landfill operated by Waste Management under NMED Permit SWM-052426).
- 5. Following removal of the tank and any liner material, a five-point composite sample will be taken of the excavation and tested per 19.15.17.13(B)(1)(b) NMAC. In the event that the criteria are not met (See Table 1), a release will be reported following Rule 116 and impacted soils will be excavated and hauled to Envirotech Landfarm near Bloomfield, NM (NMOCD Permit NM-01-0011). Approval to haul will be requested of the Aztec District office prior to initiation.

Table 1: Closure Criteria for BGTs

Table II Cloud Till State								
Components	viesting Wethods :	Glosure (limits (mg/kg)						
Benzene	EPA SW-846 Method 8021B or 8260B	0.2						
BTEX	EPA SW-846 Method 8021B or 8260B	50						
TPH	EPA SW-846 Method 8015 M(Full Range)*	100						
	or Method 418.1							
Chlorides	EPA SW-846 Method 300.1	250						

^{*} Preferred method

- 6. Upon completion of the tank removal and any necessary soil remediation, the excavation will be backfilled with non-waste earthen material compacted to native and covered with a minimum of one foot of top soil. The surface will be re-contoured to match the native grade.
- 7. For those portions of the former pit area no longer required for production activities, WPX will seed the disturbed areas the first growing season after the pit is covered. Seeding will be accomplished via drilling on the contour whenever practical, or by other Division-approved methods. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintained that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs. Note: WPX assumes the seeding stipulations including mix and seeding methods specified by the Surface Management Agency (BLM, BOR, USFS, Tribal, etc.) or Land owner as part of a surface use agreement or APD are Division-approved methods unless notified by the Division of their unacceptability.
- 8. For those portions of the former pit area required for production activities, re-seeding will be done at well abandonment, and following the procedure noted above.

Production Pit: Fiberglass Below-Grade Tank

Although these tanks have performed well to protect the public health, welfare and environment, in accordance with Rule 19.15.17.13.A (4) NMAC, Williams will removed all BGTs constructed of fiberglass by June 16, 2013. These tanks do not meet the construction/design standards specified in 19.15.17.11 (1-4). The following plans describes the general design and construction (D&C) and Operations and Maintenance (O&M)of these production pits used on Williams Production Co, LLC (WPX) locations in the San Juan Basin of New Mexico.

Design and Construction Plan

The pit is located as close as possible to the well and associated production/process equipment to minimize surface disturbance. The excavation bottom and sidewalls were compacted prior to installation of the pit. The BGT consisted of single-wall fiberglass tank following appropriate API and industry codes, placed in a 20-mil High-Strength Polyethylene resin (Permeability Rating – 0.041 USPerms), and the liner banded to the tanks. A 2" Sch-40 PVC riser was placed between the tank and liner as a leak-detection inspection port. See the attached Schematic and liner spec sheet. The pit is protected from runon by the construction of a compacted earthen berm. Fencing is constructed to protect livestock/wildlife as specified by the federal Surface Management Agency or, if not federal land/minerals requirements. WPX posts a well sign in accordance with the federal Surface Management Agency and rule 19.15.3.103.

Operations and Maintenance Plan

- 1. WPX only allows produced liquids meeting the RCRA exemption for O&G wastes to be stored in the SGT. WPX will not discharge or store any hazardous waste as defined under RCRA 40CFR 261 and 19.15.1.7.W(3) NMAC in any temporary pit. Produced water is disposed by evaporation or transport any of the following NMOCD approved facilities depending on the well location: Basin Disposal, Inc in Bloomfield, New Mexico (Permit # NM-01-005), Williams Rosa SWD#1 (Permit # SWD-916), Williams Rosa #94 (Permit # SWD-758), Burlington Resources Jillson SWD#1 (Permit #R10168A), or other NMOCD approved water disposal facilities. WPX maintains sufficient freeboard for to prevent overtopping. Discharges to the pit will be shutoff if the liquid level does not provided sufficient free-board and liquid removal can not be scheduled in a timely manner. Any oil or hydrocarbon collecting on the pit is removed. Saleable condensate is returned to the sales tank. Slop oil from compression is recycled with Safety Kleen, Farmington, NM or Hydropure, Aztec, NM (No Permit Required).
- 2. If the tank integrity is compromised:
 - a. All discharges will be shut off to the pit.
 - b. All liquids will be removed as soon as possible but no more that within 24 hours of discovery
 - c. WPX will notify and report to NMOCD as follows:
 - i. If the release is less than 25 bbls, the Aztec District Office by phone or email within 48-hours of discovery and repair.
 - ii. If the release is suspected to be greater than 25 bbls, the Aztec District Office and the Environmental Bureau Chief by phone for immediate verbal notification pursuant to 19.15.3.116.B (1)(d).
 - d. Written Spill/Release reports will be submitted on Form C-141 per 19.15.3.116.C NMAC within 15 days to the Aztec District Office.
- 3. Berms around the perimeter of the pit, shall be maintained as protection from run-on.
- 4. WPX will inspect the BGT pit monthly. Electronic copies of the inspections will be kept at the WPX San Juan Basin office for a minimum of five years following completion. Copies of the inspections will be available to NMOCD upon request.

Production Pit: Below-Grade Tank Closure Plan

In accordance with Rule 19.15.17.13 NMAC, the following plan describes the general closure requirements of below-grade tanks (BGT) on Williams Production Co, LLC (WPX) locations in the San Juan Basin of New Mexico. This is WPX's standard procedure for all out-of-service BGTs used to store produced liquids during production operations at gas wells operated by WPX.

For those closures which do not conform to this standard closure plan, a separate well/pit specific closure plan will be developed and utilized. All closure activities will include proper documentation and will be submitted to OCD within 60 days of the pit closure on a Closure Report using Division Form C-144. The Report will include the following:

- Plot Plan (Pit Diagram)
- Available Inspection reports

- Sampling Results
- Waste disposal documentation

General Plan Requirements:

- 1. All piping will be rerouted to an alternative produced water storage/disposal location (e.g. surface tanks, temporary frac tank ...). The well will be temporarily shut in until the rerouting is completed.
- 2. All produced water will be removed from the BGT following discharge-pipe rerouting. Produced water will be disposed of by injection at one of the Williams Production Rosa Unit Salt Water Disposal wells: Rosa SWD #1 (API: 30-039-27055) I-23-31N-06W Permit SWD-916 or Rosa Unit #94 (API: 30-039-23035) K-16-31N-05W, Permit SWD-758.
- 3. Notice of Closure will be given to the landowner or SMA, and the Aztec District office between 72 hours and one week of the scheduled closure via email or phone. The notification of closure will include the followina:
 - a. Operators Name (WPX)
 - b. Well Name and API Number
 - c. Location (USTR)
- 4. The BGT and all associated materials will be removed, and recycled, reused, or disposed. of in a Division-approved facility. All materials that can not be recycled or reused will be treated a solid waste and will be disposed of at a licensed disposal facility (probably San Juan Regional Landfill operated by Waste Management under NMED Permit SWM-052426).
- 5. Following removal of the tank and any liner material, a five-point composite sample will be taken of the excavation and tested per 19.15.17.13(B)(1)(b) NMAC. In the event that the criteria are not met (See Table 1), a release will be reported following Rule 116 and impacted soils will be excavated and hauled to Envirotech Landfarm near Bloomfield, NM (NMOCD Permit NM-01-0011). Approval to haul will be requested of the Aztec District office prior to initiation.

Table 1: Closure Criteria for BGTs

Components	a Testing Methods	Glosure (imits (mg//kg)
Benzene	EPA SW-846 Method 8021B or 8260B	0.2
BTEX	EPA SW-846 Method 8021B or 8260B	50
TPH	EPA SW-846 Method 8015 M(Full Range)*	100
	or Method 418.1	
Chlorides	EPA SW-846 Method 300.1	250

^{*} Preferred method

- 6. Upon completion of the tank removal and any necessary soil remediation, the excavation will be backfilled with non-waste earthen material compacted to native and covered with a minimum of one foot of top soil. The surface will be re-contoured to match the native grade.
- 7. For those portions of the former pit area no longer required for production activities, WPX will seed the disturbed areas the first growing season after the pit is covered. Seeding will be accomplished via drilling on the contour whenever practical, or by other Division-approved methods. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintained that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs. Note: WPX assumes the seeding stipulations including mix and seeding methods specified by the Surface Management Agency (BLM, BOR, USFS, Tribal, etc.) or Land owner as part of a surface use agreement or APD are Division-approved methods unless notified by the Division of their unacceptability.
- 8. For those portions of the former pit area required for production activities, re-seeding will be done at well abandonment, and following the procedure noted above.



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client:	Williams	Project #:	04108-0136
		•	
Sample ID:	BGT	Date Reported:	01-05-11
Laboratory Number:	56942	Date Sampled:	12-29-10
Chain of Custody No:	9866	Date Received:	01-03-11
Sample Matrix:	Soil	Date Extracted:	01-03-11
Preservative:		Date Analyzed:	01-04-11
Condition:	Intact	Analysis Requested:	8015 TPH

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)	
Gasoline Range (C5 - C10)	1.1	0.2	
Diesel Range (C10 - C28)	ND	0.1	
Total Petroleum Hydrocarbons	1.1		

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

Rosa 36B

Analyst



EPA Method 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Quality Assurance Report

Client:	QA/QC		Project #:		N/A
Sample ID:	01-04-11 QA/0	QC O	Date Reported:		01-05-11
Laboratory Number:	56941		Date Sampled:		N/Ą
Sample Matrix:	Methylene Chlor	ride	Date Received:		N/A
Preservative:	N/A		Date Analyzed:		01-04-11
Condition:	N/A		Analysis Requeste	ed:	TPH
	I-Cal Date	》。i-Cal RF:心	C-Cal RF	% Différence	Accept Range
Gasoline Range C5 - C10	01-04-11	9.9422E+002	9.9462E+002	0.04%	0 - 15%
Diesel Range C10 - C28	01-04-11	9.9960E+002	1.0000E+003	0.04%	0 - 15%
Blank@onc*(mg/L-img/l	(g)	Concentration		Detection Lin	ńt
Gasoline Range C5 - C10		ND	,	0.2	
Discal Danus C40 C00		AID		* 4	

-1000: 11ango 010 020				0,1
Duplicate Conc. (mg/Kg)	Sample	Duplicate	% Difference	Accept Range
Gasoline Range C5 - C10	ND	ND	0.0%	0 - 30%

Gasoline Range C5 - C10	ND	ND	0.0%	0 - 30%
Diesel Range C10 - C28	ND	ND	0.0%	0 - 30%

Spike Conc. (mg/Kg)	Sample	Spike Added	Spike Resúlt	% Recovery	Accept Range
Gasoline Range C5 - C10	ND	250	253	101%	75 - 125%
Diesel Range C10 - C28	ND	250	252	101%	75 - 125%

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

QA/QC for Samples 56941-56946

Analyst



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	Williams	Project #:	04108-0136
Sample ID:	BGT	Date Reported:	01-04-11
Laboratory Number:	56942	Date Sampled:	12-29-10
Chain of Custody:	9866	Date Received:	01-03-11
Sample Matrix:	Soil	Date Analyzed:	01-04-11
Preservative:		Date Extracted:	01-03-11
Condition:	Intact	Analysis Requested:	BTEX
		Dilution:	10

	Concentration	Det. Limit
Parameter	(ug/Kg)	(ug/Kg)
	(-3.1-9)	_3\3
	•	
Benzene	ND	0.9

Toluene	ND	1.0
Ethylbenzene	ND	1.0
p,m-Xylene	ND	1.2
o-Xylene	ND	0.9

Total BTEX ND

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	95.8 %
	1,4-difluorobenzene	102 %
	Bromochlorobenzene	90.5 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Rosa 36B

Analyst



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	N/A	Project #:	N/A
Sample ID:	0104BBLK QA/QC	Date Reported:	01-04-11
Laboratory Number:	56941	Date Sampled:	N/A
Sample Matrix:	Soil	Date Received:	N/A
Preservative:	N/A	Date Analyzed:	01-04-11
Condition:	N/A	Analysis:	BTEX
		Dilution:	10

Calibration and Detection Limits (ug/L)	, i Cal RF	C-Cal RF Accept Rang	%Dff e 0 = 15%	Blank Conc	Detect:
Benzene	1.4154E+005	1.4182E+005	0.2%	ND	0.1
Toluene	1,4945E+005	1.4975E+005	0.2%	ND	0.1
Ethylbenzene	1.3970E+005	1.3998E+005	0.2%	ND	0.1
p,m-Xylene	3.2344E+005	3.2409E+005	0.2%	ND	0.1
o-Xylene	1.2826E+005	1.2852E+005	0.2%	ND	0.1

Sample: Du	plicate :	%Diff.	Accept Range	Detect Limit
ND	ND	0.0%	0 - 30%	0.9
ND	МD	0.0%	0 - 30%	1.0
ND	ND	0.0%	0 - 30%	1.0
ND	ND	0.0%	0 - 30%	1.2
ND	ND	0.0%	0 - 30%	0.9
	ND ND ND ND	ND ND ND ND ND ND ND ND	ND ND 0.0% ND ND 0.0% ND ND 0.0% ND ND 0.0%	ND ND 0.0% 0 - 30%

Spike Conc. (ug/Kg)	Sample Amo	ount Spiked Spik	ed Sample : %	Recovery	Accept Range
Benzene	ND	500	499	100%	39 - 150
Toluene	ND	500	491	98.2%	46 - 148
Ethylbenzene	ND	500	461	92.3%	32 - 160
p,m-Xylene	ND	1000	971	97.1%	46 - 148
o-Xylene	ND	500	474	94.9%	46 - 148

ND - Parameter not detected at the stated detection limit.

Dilution: Spike and spiked sample concentration represent a dilution proportional to sample dilution.

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996.

Comments:

QA/QC for Samples 56941-56946

Analyst



Client:	Williams	Project #:	04108-0136
Sample ID:	BGT	Date Reported:	01-04-11
Laboratory Number:	56942	Date Sampled:	12-29-10
Chain of Custody No:	9866	Date Received:	01-03-11
Sample Matrix:	Soil	Date Extracted:	01-04-11
Preservative:		Date Analyzed:	01-04-11
Condition:	Intact	Analysis Needed:	TPH-418.1

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

91.6

6.6

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Rosa 36B



EPA METHOD 418.1 TOTAL PETROLEUM HYROCARBONS QUALITY ASSURANCE REPORT

Client:	QA/QC	Project#:	N/A
Sample ID:	QA/QC	Date Reported:	01-04-11
Laboratory Number:	01-04-TPH.QA/QC 56941	Date Sampled:	N/A
Sample Matrix:	Freon-113	Date Analyzed:	01-04-11
Preservative:	N/A	Date Extracted:	01-04-11
Condition:	N/A	Analysis Needed:	TPH

Calibration	I-Cal Date	 .C-Cal Date	I-Cal RF:	C-Cal RF.	% Difference	Accept, Range
	12-27-10	01-04-11	1,660	1.720	3.6%	+/- 10%

Blank Conc. (mg/Kg) TPH	Concentration ND	er server game og er	Detection Limit 6.6	The state of the same of the
Duplicate Conc. (mg/Kg) TPH	Sample 33.2	Duplicate 31.9	% Difference 3.9%	Accept Range +/- 30%
Spike Conc. (mg/Kg)	Spike Added	Spike Result	~ % Recovery	Accept Range

ND = Parameter not detected at the stated detection limit.

References:

TPH

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

2,000

1,730

85.1%

and Waste, USEPA Storet No. 4551, 1978.

33.2

Comments:

QA/QC for Samples 56941-56946

Analyst



Chloride

Client: Williams Project #: 04108-0136 **BGT** Sample ID: Date Reported: 01-04-11 Lab ID#: 56942 Date Sampled: 12-29-10 Sample Matrix Soil Date Received: 01-03-11 Preservative: Date Analyzed: 01-04-11 Condition: intact Chain of Custody: 9866

Parameter Concentration (mg/Kg)

Total Chloride 10

Reference: U.S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983.

Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: Rosa 36B

Analyst

CHAIN OF CUSTODY RECORD

09866

	P	roject Name /	Location	:									ΔΝΔΙ	V919	/ PAR	AME	TERS					
	1	Kosa	31	Le B									-11 17 1C	. 0.0	, , , , , , ,	. 1	i					ļ
,	s	ampler Name:	⊕					6	Ka	6						X	7					
OK L	ec 17	Youth	Ba	Sye				801	d 80	826	<u>_0</u>	_		_		ļ						
)	С	lient No.:	00	t = 12/	~			bod	ğ	줟	/leta	nioin		Ξ		=	ш			1	8	tact
-		04	108.	0136	2			Met	Š	Met	181	۸ / ۲		with		418	띭) e	之 Sample Intact
Sample	Sample	Lab No.	S	ample	No./volume	Prese	ervative	¥.	页	ဉ္က	SH	atior	ច	긙	¥	표	呈	İ]	am b	dwg
			ļ ————		Containers	HgCi, I	HLI	F-	<u>m</u>	>_	ar.	Ö	Œ	T	9	F	0				ΰ	ν,
2010	8:35	56942	Solid	Aqueous	(C) Bieni			X	X							X	X				N	44
		s s:	Soil	Sludge						-												
			+			\perp	+	<u> </u>														
			Solid	Aqueous																		
			Soil Solid	Sludge Aqueous										ï								
			Soil Solid	Sludge Aqueous																		
			Soil	Sludge																		
			Soil	Sludge		_	<u> </u>															_
		<u></u>	Soil	Sludge	-	\dashv	+-							_						-	1	\dashv
		· 	 			+	+										\dashv		\dashv		\dashv	
			Solid	Aqueous																	İ	
			Soil Solid	Sludge Aqueous								Ī										
re)	ash	OY 1	13/11		Time 1:35	Re	ceive	d by:	(Signa	ature)		M	vl	1					Da	te ///		اسا
ire)			<u> </u>	12-14-10																		
ıte)						Re	ceive	d by:	(Signa	ature)	· · ·								_			
	Date Date Date Date Date Date Date Date	Sample Sample Time Alalo 8:35	Sample Date Time Lab No. Sample Sample Lab No.	Sample Date Time Lab No. Soll Solid	Sample Date Time Lab No. Sample Matrix Solid Sludge Aqueous	Date Time Lab No. Matrix Containers Soil Sludge Solid Aqueous Time 1: 25	Sample Date Time Lab No. Matrix Sample No. Volume Press of Containers Record of Containers Re	Sample Date Time Lab No. Matrix Containers Hold His Containers His Containers His Containers His Containers Hold His Containers His Containers His Containers His Containers His Containers His Containers His Containers His Containers His Containers His Containers His Containers His Containers His Containers His Containers His Containers His Containers His Container	Sample Date Time Lab No. Matrix Sample Mo. Matrix of Containers HgC, HD Lab No. Soll Sludge Aqueous Soll Aqueous Soll Sludge Solid Aqueous Solid Solid Aqueous Solid Solid Aqueous Solid Solid Aqueous Solid Solid Aqueous Solid Solid Aqueous Solid Solid Aqueous Solid Solid Aqueous Solid Solid Aqueous Solid Solid Aqueous Solid Solid Aqueous Solid Solid Aqueous Solid Solid Solid Aqueous Solid Solid Aqueous Solid Solid Aqueous Solid S	Sample Sample Lab No. Sample Matrix Containers Hotel III Lab No. Soll Sludge Solid Aqueous Solid Sludge Solid Aqueous Solid Sludge Solid Aqueous Solid Sludge Solid Aqueous Solid Sludge Solid Aqueous Solid Sludge Solid Aqueous Solid Sludge Solid Aqueous Solid Sludge Solid Aqueous Solid Sludge Solid Aqueous Solid Sludge Solid Aqueous Solid Sludge Solid Aqueous Solid	Sample Date Time Lab No. Sample Matrix Ontainers Hope Hoservative of Containers Hope Hope Hope Hope Hope Hope Hope Hope	Sample Date Time Lab No. Sample Matrix Preservative of Containers How Incompleted Preservative of Containers How Incompleted Preservative of Containers How Incompleted Preservative Incomplete Incompleted Preservative Incompleted Incom	Sample Date Time Lab No. Matrix Containers Preservative Time Preservative Time No. Matrix Solid Process Preservative Time Preservative Tim	Sample Date Time Lab No. Sample Matrix Containers of Conta	Sample Date Time Lab No. Sample Matrix Containers Heart Lab No. Sample Matrix Containers Heart Lab No. Sample Matrix Containers Heart Lab Lab No. Sample Matrix Not Containers Heart Lab Lab No. Sample Matrix Not Containers Heart Lab Lab Lab No. Sample Matrix Not Containers Heart Lab Lab Lab No. Sample Matrix Not Containers Heart Lab Lab Lab Lab Lab Lab Lab Lab Lab Lab	Sample Date Time Lab No. Sample Matrix of Containers Preservative Time Sample Solid Aqueous Solid Aq	Sample Date Time Lab No. Matrix Sample Containers Reservative Time Preservative Pre	Sample Date Time Lab No. Sample Matrix of Matrix Octaliners (Containers Feedback) Sample Solid Aqueous Solid Aqueo	Sample Date Time Lab No. Sample Matrix Ocontainers Hook No. Matrix Ocontainers Hook No. Matrix Ocontainers Hook No. Matrix No. No. No. No. No. No. No. No. No. No.	Sample Date Time Lab No. Sample Matrix Confiainers Received by: (Signature) Lab No. Sample Matrix Confiainers Received by: (Signature) Lab No. Sample Matrix Confiainers Received by: (Signature) Lab No. Sample Matrix Confiainers Received by: (Signature) Lab No. Sample Matrix Confiainers Received by: (Signature) Lab No. Sample Matrix Confiainers Received by: (Signature) Lab No. Sample Matrix Confiainers Received by: (Signature) Lab No. Received by: (Signature)	Sample Date Time Lab No. Sample Matrix Continue Preservative E E E E E E E E E E E E E E E E E E E	Sample Date Time Lab No. Sample Matrix Matr

					SGT, BGT, Above	Is this a		Leak		Comments
Date				:	Ground	Twin	Leak	Detection		/ Repairs
Inspected	WellName	Run	Formation	Construction	Tank	Well?	Detection?	Level	Pit Level	needed
4/21/2009	ROSA UNIT #36B	Run 04-68	Mesa Verde	FIBERGLASS	BGT	NO	YES	0"	31"	OK
5/21/2009	ROSA UNIT #36B	Run 04-68	Mesa Verde	FIBERGLASS	BGT	NO	YES	0"	31"	ОК
6/29/2009	ROSA UNIT #36B	Run 04-68	Mesa Verde	FIBERGLASS	BGT	NO	YES	0"	37"	ОК
7/24/2009	ROSA UNIT #36B	Run 04-68	Mesa Verde	FIBERGLASS	BGT	NO	YES	0"	31"	ОК
8/27/2009	ROSA UNIT #36B	Run 04-68	Mesa Verde	FIBERGLASS	BGT	NO	YES	0"	33"	ОК
9/17/2009		Run 04-68	Mesa Verde	FIBERGLASS	BGT	NO	YES	0"	32"	ОК
10/28/2009	ROSA UNIT #36B	Run 04-68	Mesa Verde	FIBERGLASS	BGT	NO	YES	0"	29"	OK
11/30/2009	ROSA UNIT #36B	Run 04-68	Mesa Verde	FIBERGLASS	BGT	NO	YES	0"	31"	OK
12/30/2009	ROSA UNIT #36B	Run 04-68	Mesa Verde	FIBERGLASS	BGT	NO	YES	0"	29"	OK
1/27/2010	ROSA UNIT #36B	Run 04-68	Mesa Verde	FIBERGLASS	BGT	NO	YES	0"	30"	OK
2/25/2010	ROSA UNIT #36B	Run 04-68	Mesa Verde	FIBERGLASS	BGT	NO	YES	0"	34"	OK
3/24/2010	ROSA UNIT #36B	Run 04-68	Mesa Verde	FIBERGLASS	BGT	NO	YES	0"	6"	OK
4/26/2010	ROSA UNIT #36B	Run 04-68	Mesa Verde	FIBERGLASS	BGT	NO	YES	0"	15"	OK

Below-Grade Tank Removal Closure Report

Well:

(Rosa Unit# 036B) 30-03926600

API No:

Location: J-S11-T31N-R06W, NMPM



In accordance with Rule 19.15.17.13 NMAC, the following report describes the general closure of the referenced below-grade tanks (BGT) on Williams Production Co, LLC (WPX) location in the San Juan Basin of New Mexico. The closure follows this WPX's standard closure procedure for all BGTs regulated under Rule 19.15.17 NMAC and operated by WPX. For those closures which do not conform to the standard closure plan, a separate well/pit specific closure plan will be developed and utilized.

Closure Conditions and Timing:

Pursuant to 19.15.17.13 (A) NMAC, WPX will initiate closure of any BGT should any one of these conditions occur:

- The Division requires closure because of imminent danger to fresh water, public health or the environment.
- The integrity of the BGT fails. Notification will be within 48 hours to the Division and closure will be schedule as specified in 19.15.17.12 (A) (5) NMAC.
- WPX chooses to take the BGT out-of-service due to operational needs. Closure under these conditions will be initiated within 60 days of cessation of the BGT's operation.
- BGTs installed prior to June 16, 2008 that do not meet the requirements under 19.15.17.11.1(6) NMAC and WPX-chooses not to retrofit or upgrade. Closure under these conditions will be completed within five years (by June 16, 2013).

General Plan Requirements:

Prior to initiating any BGT Closure except in the case of an emergency, WPX will
review County Tax Records for the current landowner of record. The landowner of
record will be notified of the intent to closure the BGT by certified mail and a copy of
this notification will be included in the closure report. In the case of an emergency,
the landowner of record will be notified as soon as practical.

<u>Williams notified the SMA of its intent to clean close the BGT via Certified Mail on March 10, 2009 see attached. No return receipt required per BLM:FFO/NMOCD MOU dated 5/4/09.</u>

- Notice of Closure will be given to the Aztec District office between 72 hours and one week of the scheduled closure via email or phone. The notification of closure will include the following:
 - a. Operators Name (WPX)
 - b. Well Name and API Number
 - c. Location (USTR)

<u>Aztec District office was notified of Williams E&P intent to close on (04/20/2010). Email attached.</u>

3. All piping will be rerouted to an alternative produced water storage/disposal location (e.g. surface tanks, temporary frac tank, ...). The well will be temporarily shut-in until the rerouting is completed.

Williams closed the BGT used by the Rosa Unit# 036B separator and piped all liquids to the Produced Water Storage Tank.

Oil Conservation Division

Page 1 of 3

4. All produced water will be removed from the BGT following discharge-pipe rerouting. Produced water will be disposed at one of the following NMOCD approved facilities depending on the proximity of the BGT site: Rosa Unit SWD #1 (Order: SWD-916, API: 30-039-27055), Rosa Unit #94 (Order: SWD-3RP-1003-0, API: 30-039-23035), Jillson Fed. SWD #001 (Order: R10168/R10168A, API: 30-039-25465), Middle Mesa SWD #001 (Order: SWD-350-0, API: 30-045-27004) and/or Basin Disposal (Permit: NM-01-0005).
Produced water in the BGT prior to closures was removed by vacuum truck and hauled

5. Solids and sludges will be shoveled and /or vacuumed out for disposal at Envirotech (Permit Number NM-01-0011).

No solids or sludge required removal prior to excavation and removal of the tank.

6. Williams will obtain prior approval from NMOCD to dispose, recycle, reuse, or reclaim the BGT and provide documentation of the disposition of the BGT in the closure report. Steel materials will be recycled or reused as approved by the Division. Fiberglass tanks will be empty, cut up or shredded, and EPA cleaned for disposal as solid waste. Liners materials will be cleaned without soils or contaminated material for disposal as solid waste. Fiberglass tanks and liner materials will meet the conditions of paragraph 1 subsection D or 19.15.9.712 NMAC. Disposal will be at a licensed disposal facility, presently San Juan Regional Landfill operated by Waste Management under NMED Permit SWM-052426.

The fiberglass tank and plastic liner was disposed of at the San Juan Regional Landfill.

- 7. Any equipment associated with the BGT that is no longer required for some other purpose, following the closure will be removed from the location.

 The fiberglass tank and plastic liner were removed offsite. All other piping and equipment remains in use. See attached photo.
- 8. Following removal of the tank and any liner material, a five-point composite sample will be taken of the excavation and tested per 19.15.17.13(E)(4) NMAC as identified in Table 1. Grab samples will be collected from any area that is wet, discolored or showing other evidence of a release. Results will be report to the Division following receipt from the lab on Form C-141.

Components	Testing Methods	Closure Limits (mg/Kg)	Sample Results (mg/Kg)
Benzene	EPA SW-846 Method 8021B or 8260B	0.2	ND
BTEX	EPA SW-846 Method 8021B or 8260B	50	ND
TPH	EPA SW-846 Method 418.1(1)	100	91.6
Chlorides	EPA SW-846 Method 300 1(!)	250(2)	10

Table 1: Closure Criteria for BGTs

(1) Method modified for solid waste

to the Rosa Unit disposal wells listed.

- $^{(2)}$ If background concentration of Chlorides greater than 250 mg/Kg, then higher concentration will be used for closure.
- 9. If the Division and/or Williams determine there is a release, Williams will comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC.

No release detected.

10. Upon completion of the tank removal, and any necessary soil remediation, the excavation will be backfilled with non-waste earthen material compacted to native and covered with a minimum of one foot of top soil or background thickness. The surface will be recontoured to match the native grade.

<u>Pit area backfilled with clean earthen material following sample results. No contaminated soil taken off site.</u> Backfill compacted to avoid settling and pit area remains in use for production operations.

11. For those portions of the former pit area no longer required for production activities, WPX will seed the disturbed areas the first growing season after the pit is covered. Seeding will be accomplished via drilling on the contour whenever practical, or by other Division-approved methods. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintained that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs. Note: WPX assumes the seeding stipulations including mix and seeding methods specified by the Surface Management Agency (BLM, BOR, USFS, Tribal, etc.) APD are Division-approved methods unless notified by the Division of their unacceptability. If a landowner agreement requires reseeding or other surface restoration that does not meet the revegetation requirements of 19.15.17.13., I then WPX will submit the proposed alternative with written documentation that the landowner agrees to the alternative, for Division approval.

Pt area along with unused portions of well pad interim reclaimed and following P&A entire location to be reclaimed and recontoured in accordance with Surface Management Agency requirements in APD-COAs and per BLM:FFO/NMOCD MOU dated 5/4/09.

12. For those portions of the former pit area required for production activities, reseeding will be done at well abandonment, and following the procedure noted above.

See above notes

Closure Report:

All closure activities will include proper documentation and will be submitted to OCD within 60 days of the BGT closure on a Closure Report using Division Form C-144. The Report will include the following:

- Proof of Closure Notice (surface owner & NMOCD)
- Backfilling & Cover Installation
- Site Diagram with coordinates
- Available Inspection reports

- Confirmation Sampling Analytical Results
- Disposal Facility Name(s) and Permit Number(s)
- Re-vegetation Application Rate & Seeding techniques
- Photo Documentation of Reclamation