SUBMIT IN TRIPLICATE*

(Other instructions on

Form approved. Budget Bureau No. 42-R1425.

A CONTROL OF THE PROPERTY AND THE WAY OF THE PROPERTY OF THE

DESIGNATION AND SERIAL NO.	
079365	
DIAN, ALLOTTEE OR TRIBE NAME	
AGREEMENT NAME	
Juan 28-6 Unit	
OR LEASE NAME	
Juan 28-6 Unit	
No.	
D AND POOL, OR WILDCAT	
nco Mesa Verde	
T., R., M., OR BLK. SURVEY OR AREA • 24, T-27-N, R-6-1	
· · · · · · · · · · · · · · · · · · ·	
1	
Arriba NM	
of acres assigned this well 320.00	
LE TOOLS	
TE TOOLS	
PROX. DATE WORK WILL START*	
TITY OF CEMENT	
. to circulate	
to cover Ojo A	
to circ.liner	
de formation. ipped with on this well.	
四月四日	
to if W Ls	
12 1 9 19	
1	
e and proposed new productive vertical depths. "Give blowout	
	
тв 10-29-79	
тв	

ohFreh

STATE OF NEW MEXICO

ENERGY MID MINERALS DEPARTMENT

OIL CONSERVATION DIVISION

 1980 Form C-102 key1sed 10-1-78

All distances must be from the cuter houndaries of the Section.

Operator			Lease				Well No.
	TURAL GAS CON			<u>JAN 28-6</u>		SF-079365)	69 A
Unit Letter	Section · 24	Township	Range Zt.	, r	County	A t b	
E Actual Footage Loc	<u> </u>	27N	<u> </u> 64	Y	H10	Arriba	
1460	feet from the NO	rth line and	800	•	eet from the	West	line
Ground Level Elev.	Producing For		Pool		eet nom the		Dedicated Acreage:
6614	Mesa Ver	rde		Blanco	Mes a Ver	de 🖊	320.00 Acres
1. Outline th	e acreage dedica	ted to the subject w	ell by colo	red pencil	or hachure	marks on the	plat below.
	J	•					•
ł	an one lease is d royalty).	dedicated to the wel	l, outline e	each and id	lentify the	ownership the	ereof (both as to working
		ifferent ownership is mitization, force-pool		to the well	, have the	interests of	all owners been consoli-
X Yes	No If an	nswer is "yes," type o	of consolida	ation		Unitiza	tion
E .		owners and tract desc	riptions w	hich have	actually be	en consolidat	ted. (Use reverse side of
	f necessary.)	11 .11 1			1.1	. 1 /1	
l .						•	nunitization, unitization, approved by the Commis-
sion.	ing, or otherwise)	o: until a non-standar	u unit, ein	minating Si	ich litteres	is, has been a	approved by the Commis-
						·	
N I	1	K	:				CERTIFICATION
		N	1				and all and the second are
109		Ŋ	1			1	ertify that the information con-
	i	Ŋ	1				knowledge and belief.
= [-		K	i			//	
		K	i			Nome No	Dradfield
800	<u> </u>	· — — — — —				Drillin	g Clerk
رامين			1			Position El Paso	Natural Gas Co.
	(/° SF-079365	K)	1			Company	29, 1979
	(* F (12	KI .	i		1	Date	
KI 仏影ち	1,1,0	k)	1				
	<u></u>	SECTION 24					
	1	K		a de la compansión de l		1.	
ď	1	K	i			I hereby o	certify that the well-location
K	1	K	1			I	his plat was plotted from field
K	i	K	1			l l	ctual surveys made by me or upervision, and that the same
K	i	K	!				d correct to the best of my
K	i	Ŋ	. 1			knowledge	
)	+		=: #\	:/ -F !			
S	#69 i	K	E- II	W ltp	1		
\circ	ı	K	1	ነማብ	1	Date Surveye	d
KJ .	!	K	(A)	<i>11</i> 3		August	
KI	1	KI	Į.	513. # Y		Registered P. and/or Land	rolesokinal Engineer
KI	1	KI	1	e Sefea l		2.	12866
KI	1	Kl			1	Fred B	Korr Jr
						Certificate N	0.1
0 330 660	90 1320 1650 198	0 2310 2640 200	1500	1000	500 0	3950	1. 18 1. 18 1. 18 1. 18
							140

EIFEED NATURAL GAS

C.C. to Dave Vilvin

Earl Mealer

John Ahlm

19-63-forgerier FARMMOGEGIE HE VYNN - IL CE LAME PERONE - CAN, A. W. WOLLE

Well Name 5,5, 28-6 # 69A	•
Well Make 273, 30 C 69 A	
Location NW 221 27-6	•
Location NW 24 $27-6$ Formation MV	
We, the undersigned, have inspected this locatio	n and road.
	· .
U. S. Forest Service	Date
	•
Archaeologist	Date
Bureau of Indian Affairs Representative	Date
Bureau of Land Management Representative	Date
Y. S. Geological Survey Representative - AGREES TO THE FOOTAGE LOCATION OF THIS WELL. REASON:	9-6-79 Date
Geed Mixture:	
Equipment Color:	
Road and Row: '(Same) or (Separate)	
emarks: Unorthodox Location because of existing	g Pipe/rue ROW
	EIVE
	The U W In
	. 7, 1979



P. O. BOX 990 FARMINGTON, NEW MEXICO 87401 PHONE: 505-325-2841

Multi-Point Surface Use Plan

and Andreal Control and the land the first of the first of

San Juan 28-6 Unit #69A

- Please refer to Map No. 1 which shows 1. Existing Road the existing roads. New roads which will be required have been marked on this map. All existing and new roads will be properly maintained during the duration of this project.
- Planned Access Roads Please refer to Map No. 1. The grade of the access roads will be consistent with that of the local terrain. The road surface will not exceed twenty feet (20') in width. Upon completion of the project, the access road will be adequately drained to control soil erosion. Drainage facilities may include ditches, water bars, culverts or any other measure deemed necessary by trained Company personnel to insure proper drainage. Gates and/or cattleguards will be installed if necessary.
- 3. Location of Existing Wells - Please refer to Map No. 2.
- 4 _ Location of Tank Batteries, Production Facilities, and Production Gathering and Service Lines - Please refer to Maps No. 1 and No. 2. Map No. 2 shows the existing gas gathering lines. Map No. 1 shows the existing roads and new proposed access roads. All known production facilities are shown on these two maps.
- Location and Type of Water Supply Water for the proposed project will be obtained from Lobato Water Hole.
- 6. Source of Construction Materials - No additional materials will be required to build either the access road or the proposed location.
- 7. Methods of Handling Waste Materials - All garbage and trash materials will be put into a burn pit shown on the attached Location Plat No. 1. When clean-up operations are begun on the proposed project, the burn pit with its refuse will be buried to a depth of at least three feet (3'). A latrine, the location of which is also shown on Plat No. 1, 1579

7. cont'd.

will be provided for human waste. If large amounts of liquids are left in the reserve pit after completion of the project, the pit will be fenced until the liquids have had adequate time to dry. The location clean-up will not take place until such time as the reserve pit can be properly covered over to prevent run-off from carrying any of these materials into the watershed. No earthen pit will be located on natural drainages; all earthen pits will be so constructed as to prevent leakage from occurring.

- 8. Ancillary Facilities No camps or airstrips will be associated with this project.
- 9. Wellsite Layout Please refer to the attached Plat No. 1.
- 10. Plans for Restoration of the Surface After completion of the proposed project, the location will be cleaned and leveled. The location will be left in such a condition that will enable reseeding operations to be carried out. Seed mixture as designated by the responsible government agency will be used. The reseeding operation will be performed during the time period set forth by the regulatory body. The location production equipment will be painted as designated by the responsible government agency.
- 11. Other Information The terrain is sagebrush flats with sagebrush growing. Cattle and deer are occasionally seen on the proposed project site.
- 12. Operator's Representative W.D. Dawson, PO Box 990, Farmington, NM
- 13. Certification -

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by El Paso Natural Gas Company and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

L. A. Aimes

Project Drilling Engineer

EIVE

× 1979

7

Operations Plan San Juan 23-6 Unit #69A

I. Location: 1460'N, 800'W, Section 24, T-27-N, R-6-W, Rio Arriba County, NM

Field: Blanco Mesa Verde Elevation: 6624'GL

II. Geology:

A. Formation Tops:	Surface	San Jose	Lewis	3509'
	Ojo Alamo	2719'	Mesa Verde	4962'
	Kirtland	28 19'	Menefee	5088'
	Fruitland	3084'	Point Lookout	5474 '
	Pic.Cliffs	3332'	Total Depth	5975'

B. Logging Program: GR-Ind. and GR-Density at Total Depth.

C. Coring Program: none

D. Natural Gauges: 4950', 5080', 5465' and at Total Depth.
Also gauge any noticeable increase in gas. Record all gauges in daily drilling report and on morning report.

III. Drilling:

A. Mud Program: mud from surface to 3710'. Gas from intermediate casing to Total Depth.

IV. Materials:

Α.	Casing Program:	Hole Size		Casing Size	Wt.&Grade
		13 3/4"	200'	9 5/8"	36.0 # H-40
		8 3/4"	3710'	7 11	20.0# K-55
		6 1/4"	3560-5925	4 1/2"	10.5# K-55

B. Float Equipment: 9 5/8" surface casing - cement guide shoe.

7" intermediate casing - cement guide shoe and self-fill insert float valve, 5 stabilizers every other joint above shoe. Run float two joints above shoe.

- 4 1/2" liner 4 1/2" liner hanger with neoprene packoff. Geyser shoe and flapper type float collar
- C. Tubing: 5925' of 2 3/8", 4.7#, J-55 8rd EUE tubing with a common pump seating nipple one joint above bottom. Tubing will be open ended.
- D. Wellhead Equipment: $10" 2000 \times 9 5/8"$ casing head. $10" 2000 \times 6" 2000 \times 6$



V. Cementing:


9 5/8" surface casing - use 190 sks. of Class "B" cement with 1/4# gel-flake per sack and 3% calcium chloride (224 cu.ft. of slurry, 100% excess to circulate to surface). WOC 12 hours. Test casing to 600#/30 minutes.


7" intermediate casing - use 65 sks. of 65/35 Class "B" Poz with 6% gel and 2% calcium chloride (8.3 gallons of water per sack) followed by 100 sks. of Class "B" with 2% calcium chloride (223 cu.ft. of slurry, 50% excess to cover Ojo Alamo). Run temperature survey at 8 hours. WOC 12 hours. Test casing to 1200#/30 minutes.

4 1/2" liner - precede cement with 20 barrels of gel water (2 sks. gel) Cement with 297 sks. of 50/50 Class "B" Poz with 2% gel, 0.6% Halad-9, 6.25# gilsonite plus 1/4# Flocele per sack (413 cu.ft. of slurry, 70% excess to circulate liner). WOC 18 hours.

BIVE

J 1979

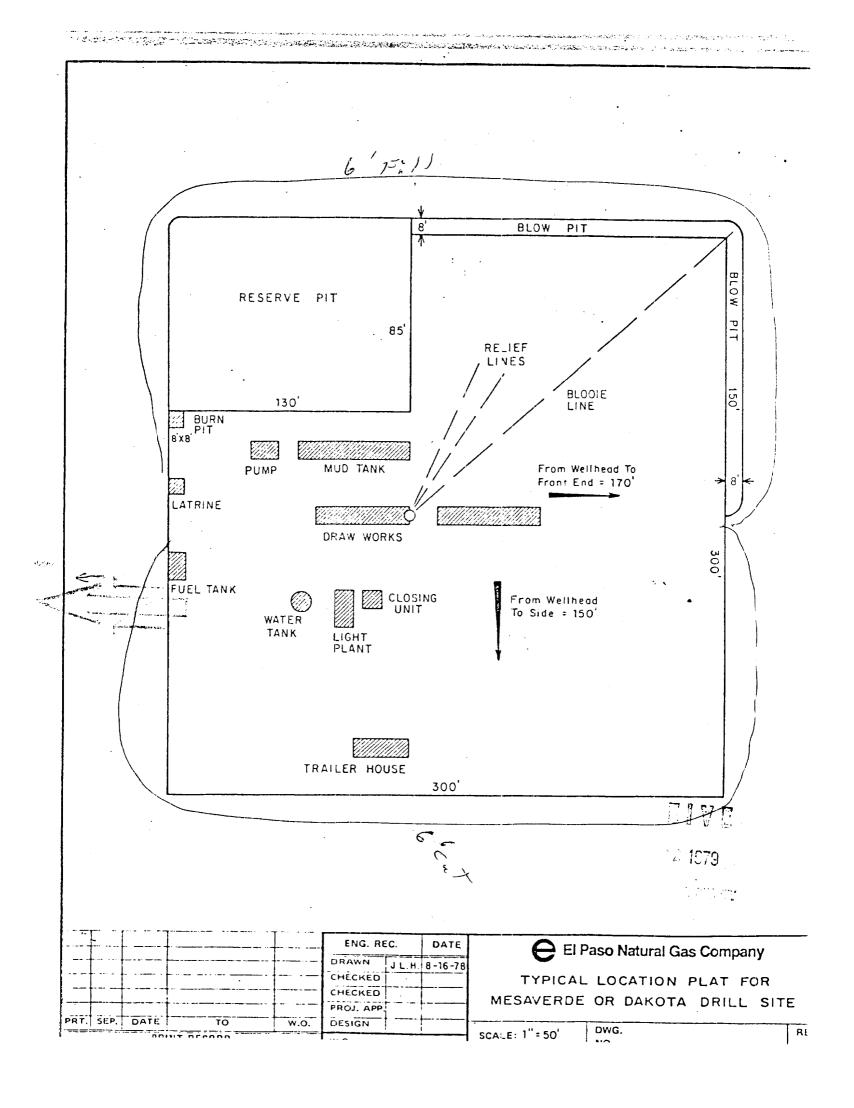

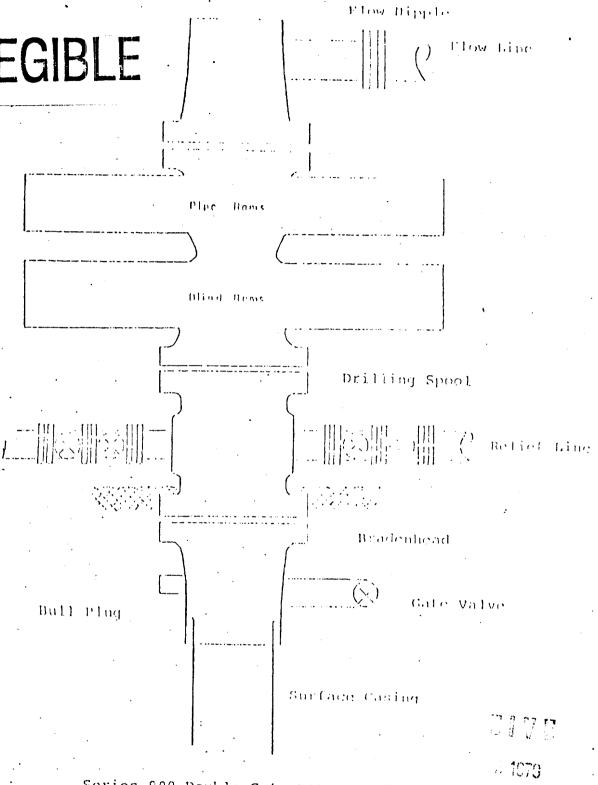

Series 900 Double Gate BOP, rated at 3000 psi Working Pressure
When gas drilling operations begin a Shaffer type 50 or equivalent rotating head is installed on top of the flow nipple and the flow line is converted into a blowie line.

