

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. TYPE OF WORK DRILL ☐ DEEPEN ☐ PLUG BACK ☐

b. TYPE OF WELL

OIL
WELL ☐GAS
WELL ☒OTHER ☐SINGLE
ZONE ☒MULTIPLE
ZONE ☐

2. NAME OF OPERATOR

Northwest Pipeline Corporation

3. ADDRESS OF OPERATOR

P.O. Box 90, Farmington, New Mexico 87401

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)
At surface

N 1080' FSL & 1390' FWL Sec 30 T27N R3W

At proposed prod. zone Same as above.

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*

45 miles Southeast of Blanco, New Mexico

15. DISTANCE FROM PROPOSED*

LOCATION TO NEAREST
PROPERTY OR LEASE LINE, FT.
(Also to nearest drif. unit line, if any)

1080'

18. DISTANCE FROM PROPOSED LOCATION*
TO NEAREST WELL, DRILLING, COMPLETED,
OR APPLIED FOR, ON THIS LEASE, FT.

N/A

16. NO. OF ACRES IN LEASE

N/A 2489.50

17. NO. OF ACRES ASSIGNED
TO THIS WELL

-320 S 301.86

19. PROPOSED DEPTH

6360'

20. ROTARY OR CABLE TOOLS

Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

7167' GR

22. APPROX. DATE WORK WILL START*

September 1980

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12-1/4"	9-5/8"	36#	200'	115 sks
8-3/4"	7"	20#	4310'	175 sks
6-1/4"	4-1/2"	10.5#	4110' - 6360'	230 sks

Selectively perforate and stimulate the Mesa Verde Formation.
Completion plans will be determined at Total Depth.

A BOP will be installed after the surface casing is set and cemented. All subsequent work will be conducted through the BOP's.

The South half of Section 30 is dedicated to this well.

Gas is dedicated.



IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24.

SIGNED

Paul C. Thompson

TITLE Drilling Engineer

DATE June 6, 1980

(This space for Federal or State office use)

PERMIT NO.

APPROVAL DATE

APPROVED BY

TITLE

CONDITIONS OF APPROVAL, IF ANY:

write NWH

d3m

Will C-104 for NSZ

*See Instructions On Reverse Side

APPROVED
AS AMENDED

SEP 12 1980

JAMES F. SIMS

DISTRICT ENGINEER

OIL CONSERVATION DIVISION

STATE OF NEW MEXICO
ENERGY AND MINERALS DEPARTMENTP. O. BOX 2088
SANTA FE, NEW MEXICO 87501Form C-107
Revised 10-1-78

All distances must be from the outer boundaries of the Section.


Operator NORTHWEST PIPELINE CORPORATION			Lease JICARILLA 92		Well No. 15
Unit Letter N	Section 30	Township 27N	Range 3W	County Rio Arriba	
Actual Footage Location of Well: 1080 feet from the South line and 1390 feet from the West line					
Ground Level Elev. 7167	Producing Formation Mesa Verde		Pool Blanco Mesa Verde		Dedicated Acreage: 320.30186 Acres

1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation _____

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) _____

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

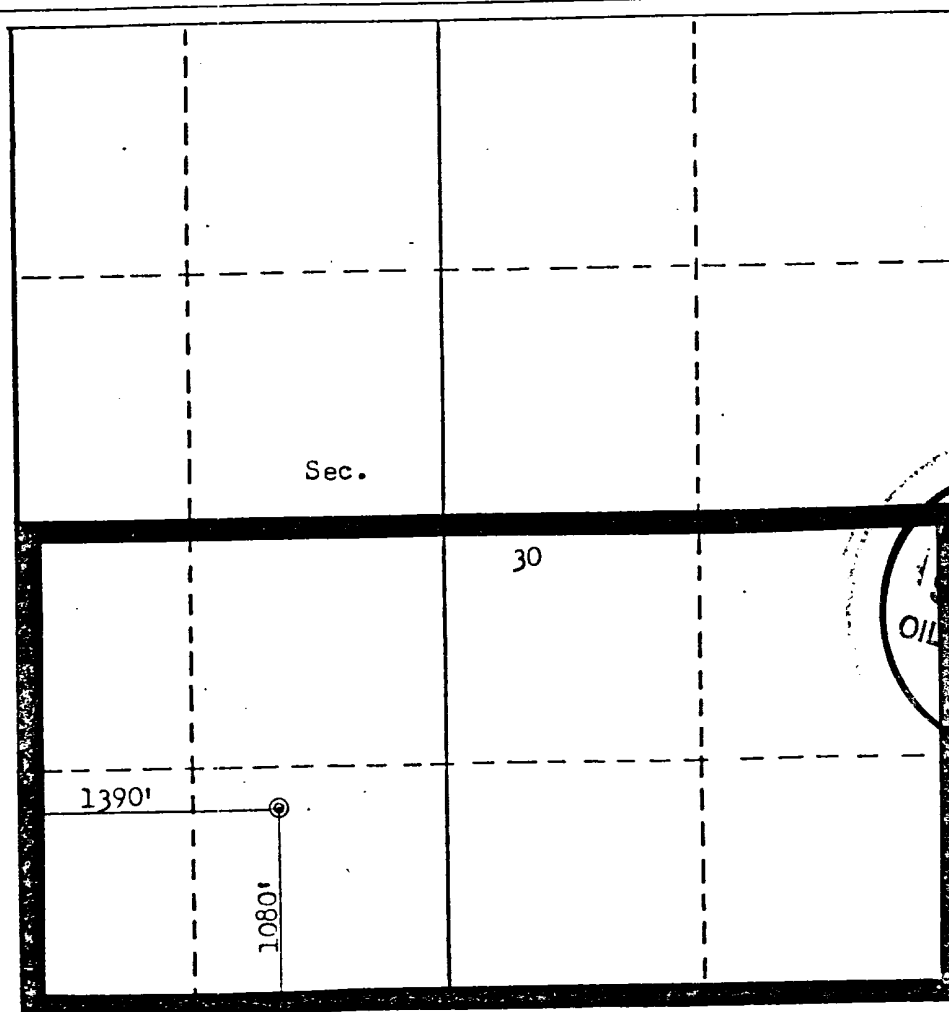

CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

Paul C. Thompson

Name

Paul C. Thompson

Position

Drilling Engineer

Company

Northwest Pipeline Corp

Date

June 3, 1980

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed


May 28, 1980

Registered Professional Engineer and/or Land Surveyor

Fred B. Karp

Certificate No.

3950



NORTHWEST PIPELINE CORPORATION
DRILLING PROGNOSIS

Jicarilla 92 #15

DATE: June 16, 1980

I. LOCATION: 1080' FSL & 1390' FWL
Sec 30 T27N R3W
Rio Arriba Co., New Mexico

ELEVATION: 7167' GR

SURFACE: Indian
MINERALS: Jicarilla Tribe
Contract #92

FIELD: Blanco Mesa Verde

II. GEOLOGY: Surface Formation - San Jose

<u>A. Formation Tops:</u>	<u>Depth</u>	<u>Formation Tops</u>	<u>Depth</u>
Ojc Alamo	3427'	Lewis	4110'
Kirtland	3627'	Cliff House	5716'
Fruitland	3795'	Menefee	5790'
Pictured Cliffs	3967'	Point Lookout	6137'
		Total Depth	6360'

B. Logging Program: Production Casing Point - Gamma Ray-Induction and Density.

C. Natural Gauges: Gauge at last connection above 5790', 6137', and at Total Depth. Gauge any noticeable increases in gas flow @ depth other than those noted above. Record all gauges on daily drilling and morning reports.

III. Drilling:

A. Contractor:

B. Mud Program: Mud, water and gas will be furnished by Northwest Pipeline Corporation from Surface to Total Depth.

- a) From Surface to Intermediate casing depth to be drilled with mud.
- b) From Intermediate casing to Total Depth to be drilled with gas.

C. While drill pipe is in use the pipe rams will be tested not less than once each day. The blind rams will be tested once each trip. All tests will be reported in the Northwest Pipeline tour reports as to time and date.

IV. Materials:

A. Casing Program:

<u>Hole Size</u>	<u>Depth O.H.</u>	<u>Casing Size</u>	<u>WT & Grade</u>
12-1/4"	200'	9-5/8"	32.3# H-40
8-3/4"	4310'	7"	20# K-55
6-1/4"	6360'	4-1/2"	10.5# K-55 (4110' - 6360')

B. Float Equipment:

- a) Surface Casing: 9-5/8" - B&W Regular Pattern Shoe.
- b) Intermediate Casing: 7" - Dowell guide shoe (Code #50101-070) and self fill insert float collar (Code #53003-070). Seven centralizers (Code #56011-070) spaced every other joint above the shoe. Place float one joint above shoe.
- c) Liner: 4-1/2" - Larkin geyser shoe (Fig 222) and Larkin Flapper type float collar (Fig 404). Burns liner hanger with neopreme pack off.

C. Tubing Program: 6310' of 2-3/8", 4.7#, EUE, J-55 tubing with seating nipple on top of bottom joint. Expendable check valve on bottom.

Drilling Prognosis


Jicarilla 92 #15


Page #2

D. Well Head Equipment: WKM Well Head. WKM representative to set slips and Make cut off.

V. Cementing:

- A. Surface Casing: 9-5/8" - Use 115 sks of Class "B" with 1/4# gel flake per sk and 3% CaCl_2 (100% excess to circulate). WOC 12 hrs. Test surface casing to 600 psi for 30 min.
- B. Intermediate Casing: 7" - Use 100 sks of 65/35 poz with 6% gel. (Yield - 1.63). Tail in with 75 sks Class "G" with 2% CaCl_2 (65% excess to cover Ojo Alamo). WOC 12 hrs. Run temp survey at 8 hrs. Test casing to 600 psi.
- C. Production Liner: 4-1/2" - Use 230 sks of Class "B" with 4% gel and 1/4 cu.ft of fine Gilsonite per sk. Precede cement with 20 bbls water mixed with 3 sks gel. (70% excess to circulate liner). Clean out with 6-1/4" bit to top of liner and pressure test with rig pump. (Test 12 hrs after plug is down). Lay down drill pipe and run 3-7/8" bit on 2-3/8" EUE tubing and clean out liner. Perforate 18 hrs after plug is down.

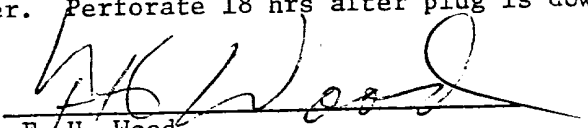

F. H. Wood


MJT/djb

Original: Well File
sc: Regular Distribution

PLAN VIEW - CHOKE MANIFOLD

Flanged cross with pressure gauge in outside opening. Screw connections are permissible but discouraged.

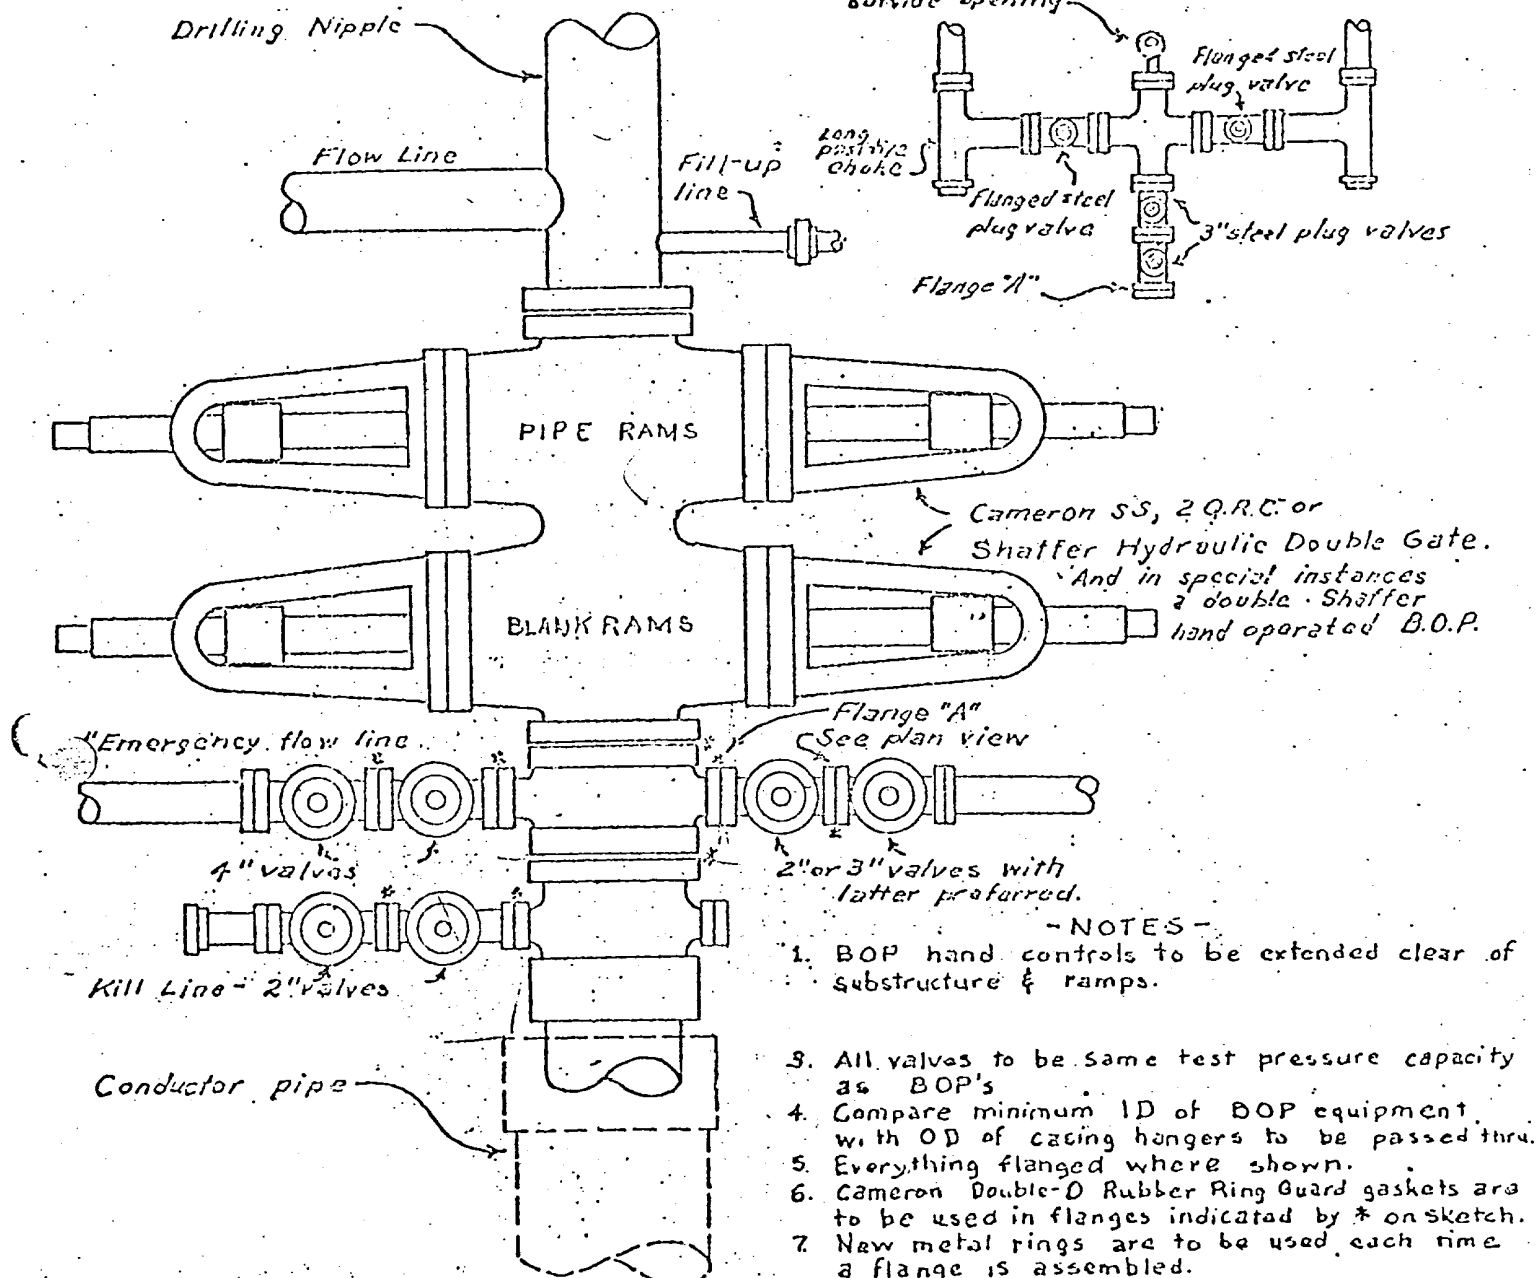

- NOTES -

1. BOP hand controls to be extended clear of substructure & ramps.
2. All valves to be same test pressure capacity as BOP's.
3. Compare minimum ID of BOP equipment with OD of casing hangers to be passed thru.
4. Everything flanged where shown.
5. Cameron Double-O Rubber Ring Guard gaskets are to be used in flanges indicated by * on sketch.
6. New metal rings are to be used each time a flange is assembled.
7. BOP's to be well braced at all times.

If possible install head so kill line valves will be under BOP's for protection. These valves to be kept closed after BOP's tested & kill line removed (by use of quick union) to fill-up line. When used this way kill line must be high pressure.

SINGLE PIPE RAM BLOWOUT PREVENTOR HOOKUP

1. Existing Roads: See attached topographic map. All existing roads used, shall be maintained in a serviceable condition at all times during the drilling operation.
2. Planned Access Roads: See attached topographic map. Maximum grade is approximately 1%. The road surface will not exceed twenty feet in width. Upon completion of drilling operations the access road will be adequately drained to control runoff and soil erosion. Drainage facilities may include ditches, water bars, culverts or any other measure deemed necessary. All activities will be confined to the access road and drill pad.
3. Location of Existing Wells: See attached topographic map.
4. Location of Tank Batteries; Production Facilities; and Production, Gathering and Service Lines: See attached topographic map for locations of existing and proposed gas gathering lines.
5. Location and Type of Water Supply: Water needed for the drilling operation will be hauled from the 29-3 Jicarilla Water hole.
6. Source of Construction Materials: No additional materials will be needed.
7. Methods for Handling Waste Disposal: All garbage, debris, and trash will be buried at least three feet deep. A portable toilet will be supplied for human waste. After drilling operations have been completed the reserve pit will be fenced and the liquid portion will be allowed to evaporate before the location is cleaned up and leveled. The earthen pits will not be located on natural drainages and will be constructed in such a manner so that they will not leak. Any evaporator pit containing toxic liquids will be fenced.
8. Ancillary Facilities: There will be no camps or airstrips associated with the drilling of this well.
9. Well Site Layout: See attached location layout sheet. ^{Blank} There will be a drainage ditch above the cut slope.
10. Plans for Restoration of the Surface: Upon completion of drilling, the location will be cleaned, and leveled so that no cut or fill banks will be steeper than 3:1.

All of the area disturbed in connection with the drill site will be seeded as close as possible for any above ground equipment while still allowing for access to the equipment. Seeding will be done within one year after drilling is completed and during the period from July 1 through September 15. Seeding will be done with seed Mixture #1.

All equipment above ground will be painted a non-glare, non-reflective, non-chalking color that simulates the natural color of the site. For this well code number 595-34127, green.
11. Other Information: If, during operations, any historic or prehistoric ruin, monument or site, or any object of antiquity is discovered, then work will be suspended and the discovery will be reported to the District Manager of the BLM.

All liquids from the line will be contained at the site unless otherwise specified by the surface agency's representative.

When drilling with gas, the line used to discharge and burn off the gas will be located so as not to damage vegetation in the area, and if necessary an earthen screen will be constructed to protect the vegetation. All liquids from the line will be contained at the site unless otherwise specified by the surface agency's representative.

The area covered by the location and proposed access road is gently sloped with scattered brush and some grasses.


12. Operator's Representative: Paul Thompson. - P.O. Box 90 - Farmington, New Mexico 87401. Phone: 327-5351 Extension # 115
13. Certification:

I hereby certify that I have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge true and correct; and, that the work associated with the operations proposed herein will be performed by Northwest Pipeline Corporation and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved.


Paul C. Thompson
Paul Thompson
Drilling Engineer

NORTHWEST PIPELINE CORPORATION

LOCATION LAYOUT JICARILLA 92 #15

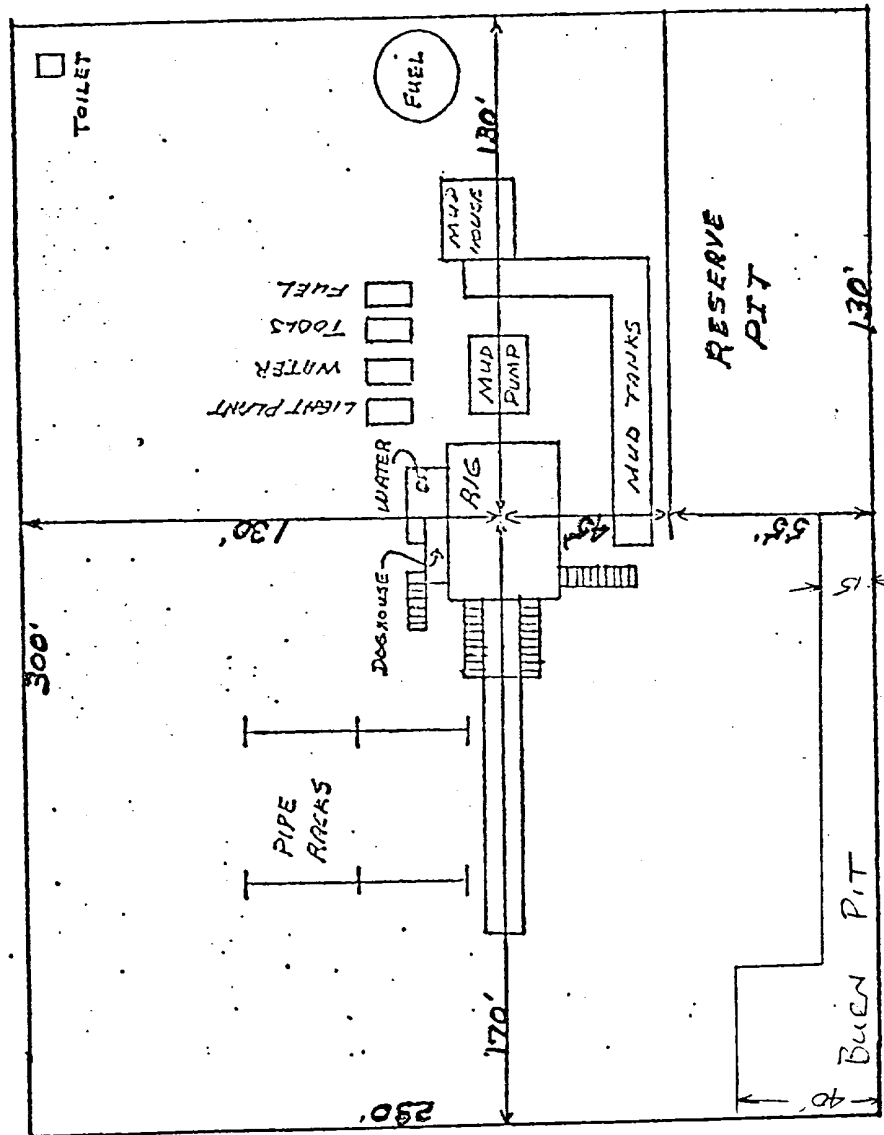

DATE: 6/9/80
SCALE: 1" = 20'

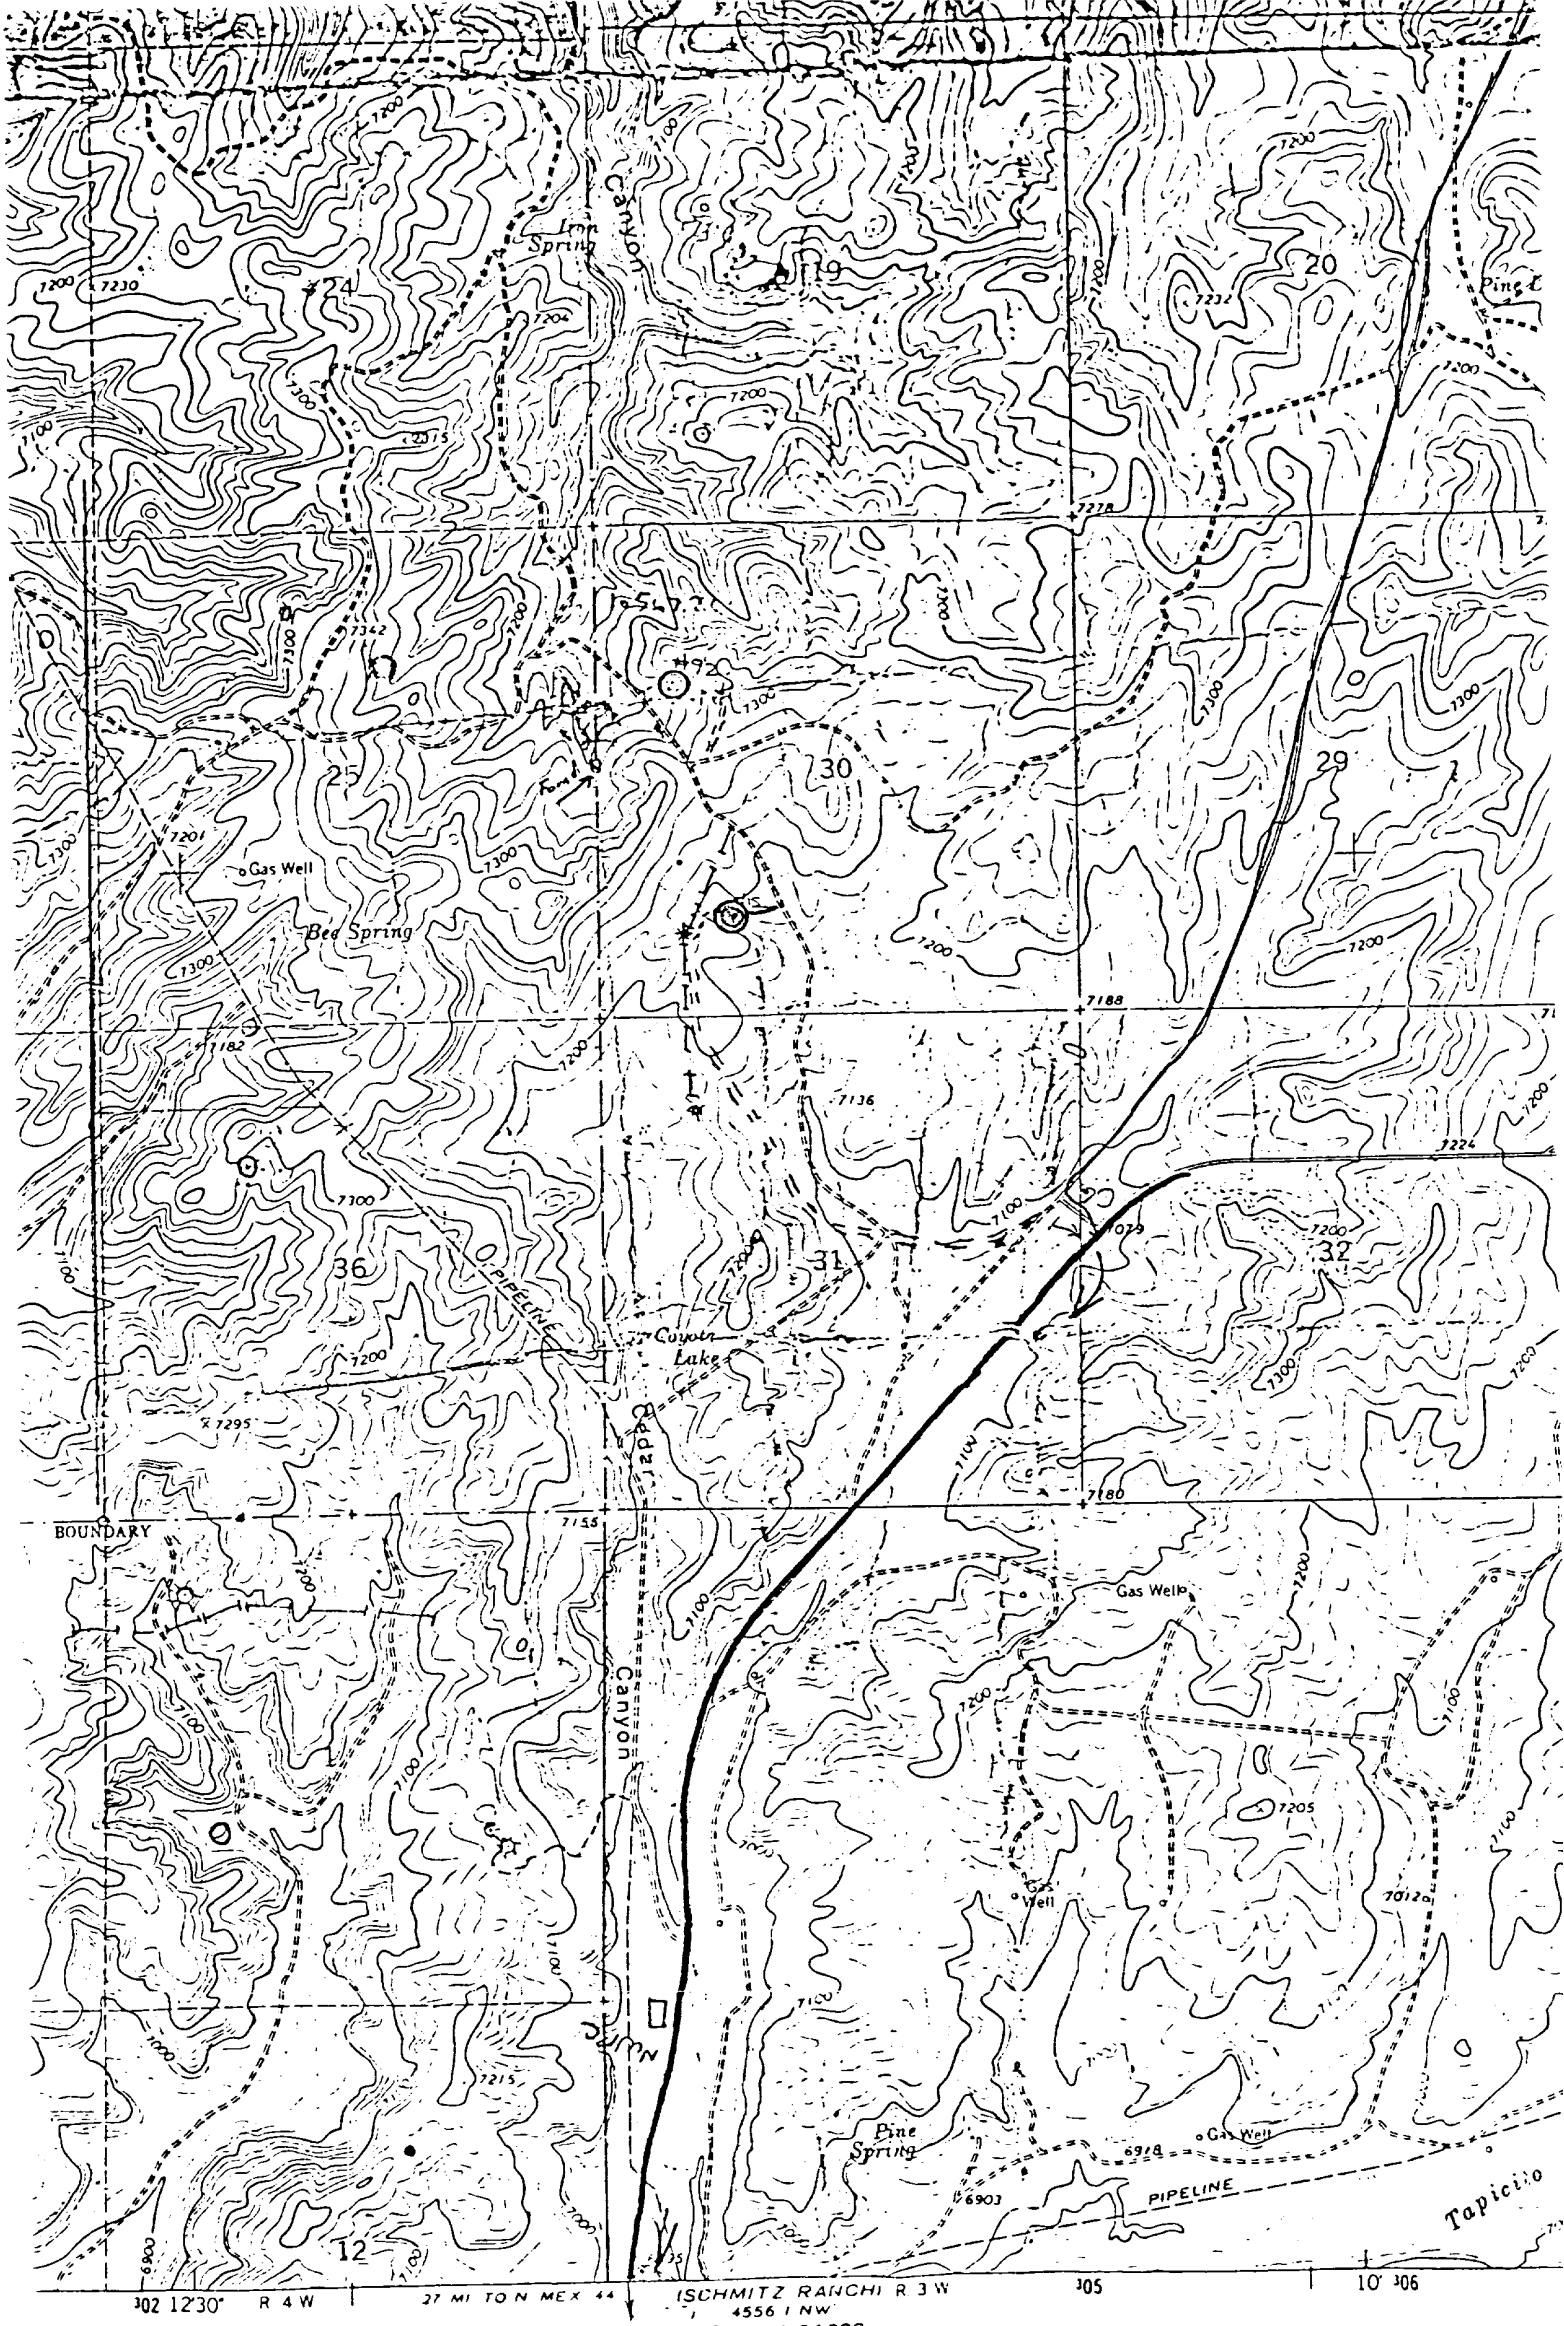

Vicinity Map for
NORTHWEST PIPELINE CORPORATION #15 JICARILLA 92
1080' FSL 1390' FWL Sec. 30-T27N-R3W
RIO ARriba COUNTY, NEW MEXICO

NATIONAL GEODETIC STATICAL DATUM OF 1929