District I
1625 N French Dr , Hobbs, NM 88240
District II
1301 W Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S St Francis Dr , Santa Fe, NM 87505

į

# State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office
For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

### Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Type of action: 

| X | Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
| Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

ability should operations result in pollution of surface water, ground water or the uply with any other applicable governmental authority's rules, regulations or ordinances
OGRID# 006515 POUN JUL 30 '08
exico 87401 <u>NIL CONS. DIV.</u>
DIST. 3
OCD Permit Number:
LN Range 13W County: San Juan
_Longitude108.22531 West NAD: ☑ 1927 ☐ 1983
Allotment
Closed-loop System: Subsection H of 19.15.17.11 NMAC
☐ Drying Pad ☐ Tanks ☐ Haul-off Bins ☐ Other
☐ Lined ☐ Unlined
Liner type: Thicknessmil
Other
Seams:  Welded  Factory Other
Volume:bblyd³
Dimensions: Lengthx Width
Fencing: Subsection D of 19.15.17.11 NMAC
☐ Chain link, six feet in height, two strands of barbed wire at top
☐ Four foot height, four strands of barbed wire evenly spaced between one and
four feet Other Fencing 4'=3' Hog wire + 1 Strand barbed wire
Netting: Subsection E of 19.15.17.11 NMAC
☐ Screen ☒ Netting ☐ Other
X Monthly inspections
Signs: Subsection C of 19.15.17.11 NMAC
X 12'x24', 2' lettering, providing Operator's name, site location, and
emergency telephone numbers
☐ Signed in compliance with 19.15.3.103 NMAC
Administrative Approvals and Exceptions:  Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.
Please check a box if one or more of the following is requested, if not leave
blank:  X Administrative approval(s): Requests must be submitted to the
appropriate division district or the Santa Fe Environmental Bureau office for consideration of approval.  Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.	
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☒ No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes 🗓 No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to temporary, emergency, or cavitation pits and below-grade tanks)  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes X No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to permanent pits)  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No ☒ NA
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	Yes X No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality. Written approval obtained from the municipality	☐ Yes ☒ No
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes 🗓 No
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☒ No
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society: Topographic map	Yes X No
Within a 100-year floodplain FEMA map	☐ Yes ☒ No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.91  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the do attached.    Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.15 NMAC   Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17   Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC   Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC   Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC   Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC   Previously Approved Design (attach copy of design)   API Number.   30-045-   or Permit Number.	cuments are
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC	
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the do attached.  Geologic and Hydrogeologic Data (required for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of Siting Criteria Compliance Demonstrations (required for on-site closure) - based upon the appropriate requirements of 19.15.17.10  Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.9 NMAC and 19.15 17.13 NMAC  NMAC	19.15.17.15
Previously Approved Design (attach copy of design) API Number:	

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC						
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the de	ocuments are					
tached.  Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.15 NMAC  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17 10 NMAC  Climatological Factors Assessment						
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC  Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC  Leak Detection Design - based upon the appropriate requirements of 19.15 17.11 NMAC						
☐ Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Quality Control/Quality Assurance Construction and Installation Plan ☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15 17.12 NMAC ☐ Resolved and Operating Properties Plane the appropriate requirements of 19.15 17.12 NMAC						
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  Nuisance or Hazardous Odors, including H <sub>2</sub> S, Prevention Plan  Emergency Response Plan						
☐ Oil Field Waste Stream Characterization ☐ Monitoring and Inspection Plan ☐ Erosion Control Plan ☐ Erosion Control Plan						
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC						
Proposed Closure: 19.15.17.13 NMAC  Type: ☐ Drilling ☐ Workover ☐ Emergency ☐ Cavitation ☐ Permanent Pit ☒ Below-grade Tank ☐ Closed-loop System ☐	Alternative					
Proposed Closure Method: Waste Excavation and Removal On-site Closure Method (only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial						
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for con	nsideration)					
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC						
Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.						
Ground water is less than 50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA					
Ground water is between 50 and 100 feet below the bottom of the buried waste  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No					
Ground water is more than 100 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA					
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No					
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site, Aerial photo; Satellite image	☐ Yes ☐ No					
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No					
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality: Written approval obtained from the municipality	☐ Yes ☐ No					
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No					
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No					
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No					
Within a 100-year floodplain FEMA map	☐ Yes ☐ No					

Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.  ☑ Protocols and Procedures - based upon the appropriate requirements of 19.15 17.13 NMAC  ☑ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19 15.17.13 NMAC  ☑ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)  ☑ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  ☑ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
☒ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC
Waste Removal Closure For Closed-loop Systems That Utilize Haul-off Bins Only: (19.15.17.13.D NMAC) Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings.
Disposal Facility Name: Disposal Facility Permit Number:
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate,
by a check mark in the box, that the documents are attached.  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC  Construction and Design of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.13 NMAC  Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC  Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC  Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC  Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)  Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC
Operator Application Certification:
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.
Name (Print): Kurt Fagrelius Title: Vice President, Exploration
Signature. Kurt Fzgn. Lin Date. 7-28-08
e-mail address: kfagrelius@duganproduction.com Telephone: 505-325-1821 (0), 505-320-8248 (C)
OCD Approval: Permit Application (including closure plan) Closure Plan (only)
OCD Representative Signature: Bl Sell Approval Date: 8-4-08
Title: Enviro Spec OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC  Closure Completion Date:
Closure Method:  ☐ Waste Excavation and Removal ☐ On-Site Closure Method ☐ Alternative Closure Method ☐ If different from approved plan, please explain
Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached.  Proof of Closure Notice
Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation)
<ul> <li>□ Proof of Deed Notice (if applicable)</li> <li>□ Plot Plan</li> <li>□ Confirmation Sampling Analytical Results</li> <li>□ Waste Material Sampling Analytical Results</li> <li>□ Disposal Facility Name and Permit Number</li> <li>□ Soil Backfilling and Cover Installation</li> <li>□ Re-vegetation Application Rates and Seeding Technique</li> <li>□ Site Reclamation (Photo Documentation)</li> <li>On-site Closure Location: Latitude</li> <li>Longitude</li> <li>NAD. □1927 □ 1983</li> </ul>
□ Proof of Deed Notice (if applicable) □ Plot Plan □ Confirmation Sampling Analytical Results □ Waste Material Sampling Analytical Results □ Disposal Facility Name and Permit Number □ Soil Backfilling and Cover Installation □ Re-vegetation Application Rates and Seeding Technique □ Site Reclamation (Photo Documentation) □ On-site Closure Location: Latitude Longitude NAD. □ 1927 □ 1983  Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
□ Proof of Deed Notice (if applicable) □ Plot Plan □ Confirmation Sampling Analytical Results □ Waste Material Sampling Analytical Results □ Disposal Facility Name and Permit Number □ Soil Backfilling and Cover Installation □ Re-vegetation Application Rates and Seeding Technique □ Site Reclamation (Photo Documentation) □ On-site Closure Location: Latitude Longitude NAD. □ 1927 □ 1983  Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Location: Latitude Longitude NAD. 1927 1983  Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.

#### Paul Hall #1 Hydrogeologic Report

The Paul Hall #1 is located on Federal land on the northwest rim of the San Juan Basin, in San Juan County, New Mexico. The area is characterized as an arid, "badlands" topography bordered on the west by a "hogback" of basin-ward dipping, rock outcrops covered with sage and isolated stands of juniper. To the east is an elevated, flat-lying dry mesa with sage and sparse grass. The area is poorly drained by arroyos that drain to the south and eventually into the La Plata River drainage. These arroyos carry minimal amounts of water during seasonal periods of rain and snow melt.

A records search of the NM Office of the State Engineer –iWATERS database was conducted on a three square mile area centered on the Paul Hall #1 location (Exhibit 2). Six water wells were located 8,000 – 10,000 feet to the south and east. The wells were drilled to a depth of between 42 and 190 feet. The depth to ground water was reported from 2 to 70 feet. The wells are all located in the La Plata River valley, an area with irrigation ditches and stock ponds. The results of the search are shown on Exhibit 1.

The main source of water in the region is from irrigation water that is taken from the La Plata River and transported in unlined ditches to fields south and east (1-1/2-2 miles) of the proposed below grade tank. Ground water may be encountered in valley-fill deposits in existing arroyos at shallow depths of approximately 20-70 feet below the surface. However, the proposed below grade tank is not located in an arroyo; a very small arroyo is located 600 feet to the south.

The Nacimiento Formation extends from the surface down to a depth of approximately 580 feet. At the location of the proposed below grade tank the Nacimiento is comprised of mudstone / shale with only 30 feet of shaly sand broken into 3 separate stringers, the thickest of which is 15 feet at a depth of 415 – 430 feet below the surface. Shale content in the Nacimiento increases to the west toward the outcrop and recharge area.

The Nacimiento can be a source of ground water for livestock purposes and more rarely domestic use in some areas near the outcrop. But at the subject location there are not any sand layers in the section above the 400 foot depth. The Nacimiento is not expected to contain significant-quantities of ground water in the area of the proposed below grade tank.

Based on electric open hole logs, the iWATERS database, literature reviewed, depth to ground water ranges from 25 - 50 feet below the surface in and along the major drainages in the area. Moving away from the rivers and washes, ground water depth drops rapidly to greater than 200 feet below the surface. At the location of the subject below grade tank, small amounts of ground water might be found at depths of approximately 415 - 430 feet from a stray sand in the lower Nacimiento Formation. A deeper source of ground water would include the Ojo Alamo at a depth of 580 - 665 feet below the surface.

- Stone, W.J., Lyford, F.P., Frenzel, P.F., Mizell, N.H., and Padgett, E.T., 1983, Hydrogeology and water resources of San Juan Basin, New Mexico: New Mexico Bureau of Mines and Mineral Resources Hydrologic Report 6, 70 p.
- Brown, D.R., and Stone, W.J., 1979, Hydrogeology of Aztec quadrangle, San Juan County, New Mexico: New Mexico Bureau of Mines and Mineral Resources Hydrogeologic Sheet 1.
- Levings, G.W., Craigg, S.D., Dam, W.L. Kernodle, J.M., and Thorn, C.R., 1990, Hydrogeology of the San Jose, Nacimiento, and Animas Formations in the San Juan Structural Basin, New Mexico, Colorado, Arizona and Utah: U.S. Geological Survey, Atlas HA-720-A, Sheet 1 and 2.
- Thorn, C.R., Levings, G.W., Craigg, S.D., Dam, W.L., and Kernodle, J.M., 1990, Hydrogeology of the Ojo Alamo Sandstone in the San Juan Structural Basin, New Mexico, Colorado, Arizona and Utah: U.S.G.S, Atlas HA-720-B, Sheet 1 and 2.

# New Mexico Office of the State Engineer POD Reports and Downloads

	Town	ıship: 3	1N Range:	13W	Sections:	16,17,1	8,19,2	,20,21,28,29,30		
	NAD27	X:	Y:		Zone:	F	<u>.</u> ] s	Search Radius	s:	
County:			Basin:			Ŭ N	lumbe	er:	Suffix:	
Owner Nar	ne: (Firs	st)		(Last)		**************************************	ON	lon-Domestic	O Domestic	All
PO	D / Surfac	e Data F	Report	Avg	Depth to W	ater Rep	oort	Wate	er Column Repor	t
			Clear Fo	orm [	IWATERS	S Menu		Help		

#### WATER COLUMN REPORT 07/21/2008

## (quarters are 1=NW 2=NE 3=SW 4=SE)

	(quarter	s are	pro	ges	st to	smallest)			Depth	Depth	Water	(in fee
POD Number	Tws	Rng	Sec	q o	рŗ	Zone	Х	Y	Well	Water	Column	
SJ 00398	31N	13W	21						104	6	98	
SJ 02294	31N	13W	28	4 2	2 3				42	15	27	
SJ 02724	31N	13W	28	4 2	2 3				40	5	35	
SJ 03730 POD1	31N	13W	28	4 3	3 1				190	70	120	
SJ 02811	31N	13W	28	4 4	4 1				50	2	48	
SJ 02766	31N	13W	28	4	4 4				50	12	38	

Record Count: 6


#### Siting Criteria for the Paul Hall #1


- 1. Ground water is not less than 50-feet below the bottom of the below grade tank. Ground water is greater than 100-feet below the bottom of the below grade tank.
- 2. The below grade tank is not within 300-feet of a continuously flowing water course, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from ordinary high water mark). See the attached Topographic map (Exhibit 2) and Visual Inspection Certification of the location and area around the subject below grade tank.
- 3. The below grade tank is not within 300-feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. See the attached Satellite Image (Exhibit 3) and Visual Inspection certification of the location and area around the subject below grade tank.
- 4. The below grade tank is not within 500-feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. See the attached NM Office of the State Engineer iWATERS database search (Exhibit 4) and Visual Inspection certification of the location and area around the subject below grade tank.
- 5. The below grade tank is not located within the incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978 Section 3-27-3, as amended. See the attached Topographic map of the location and area around the subject below grade tank.
- 6. The below grade tank is not located within 500-feet of a wetland. See the attached Topographic map and Visual Inspection Certification of the location and area around the subject below grade tank.
- 7. The below grade tank is not located within the area overlying a subsurface mine. See the attached Mine, Mills and Quarry Map of New Mexico (New Mexico, EMND 2008) (Exhibit 5) showing the location and area around the subject pit.
- 8. The below grade tank is not located within an unstable area. See the attached Topographic map of the location and area around the subject below grade tank.
- 9. The below grade tank is not located within a 100-year floodplain area. See the attached FEMA map (Exhibit 6) of the 100 year floodplain showing the location and area around the subject pit.

#### Paul Hall #1 Visual Inspection Certification

I, Kurt Fagrelius, Vice President of Exploration for Dugan Production Corp. 709 East Murray Drive, Farmington, New Mexico hereby certify that I or persons under my direct supervision, prepared the attached exhibits and conducted a Visual Inspection of the location and area around the Paul Hall #1 below grade tank (Week of July 14, 2008). This application is in full compliance with all siting criteria and standards for below grade tanks established by the State of New Mexico, Energy Minerals and Natural Resources Department 19.15.17.10 NMAC.

Kurt Fagne Lin Kurt Fagrelius

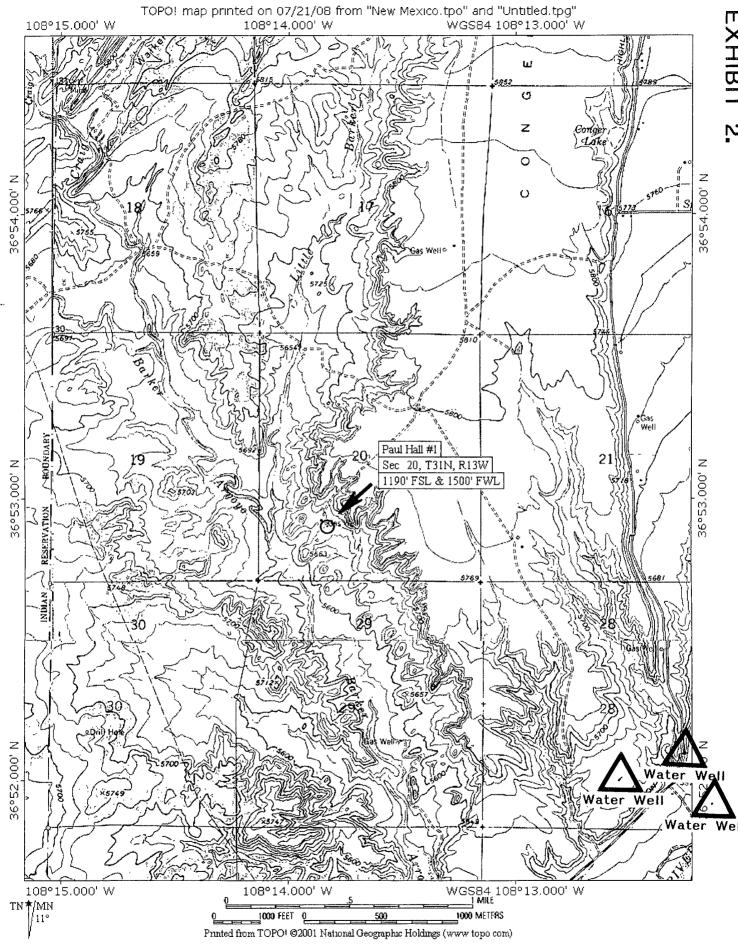

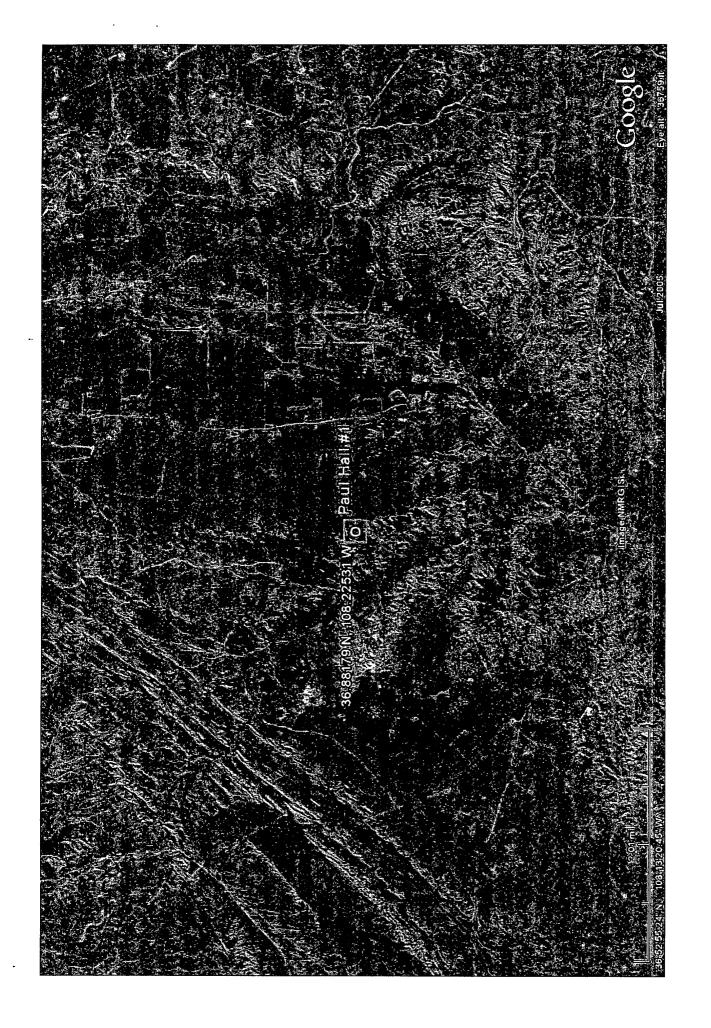

#### New Mexico Office of the State Engineer **POD Reports and Downloads** Township: 31N Range: 13W Sections: 20 Search Radius: NAD27 X: Y: Zone: Number: County: Basin: Suffix: Owner Name: (First) (Last) ONon-Domestic ODomestic OAII POD / Surface Data Report Avg Depth to Water Report Water Column Report Clear Form iWATERS Menu WATER COLUMN REPORT 07/21/2008 (quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest) Depth Depth Water (in feet)

Well


Water

Column

No Records found, try again

POD Number

Tws Rng Sec q q q Zone

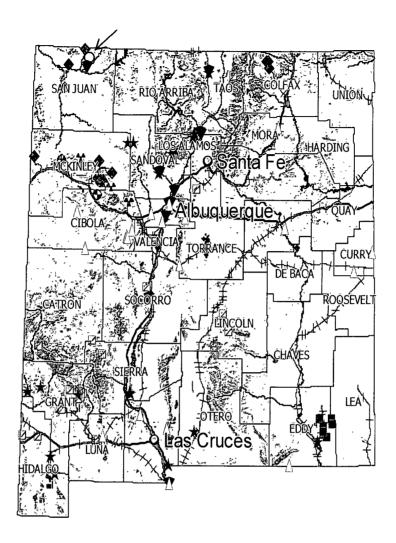


# Mine, Mills and Quarry Map of New Mexico

Dugan Production Corp.

Paul Hall #1

Taken from the New Mexico Energy, Minerals and Natural Resources Department.

Mining and Minerals Division.

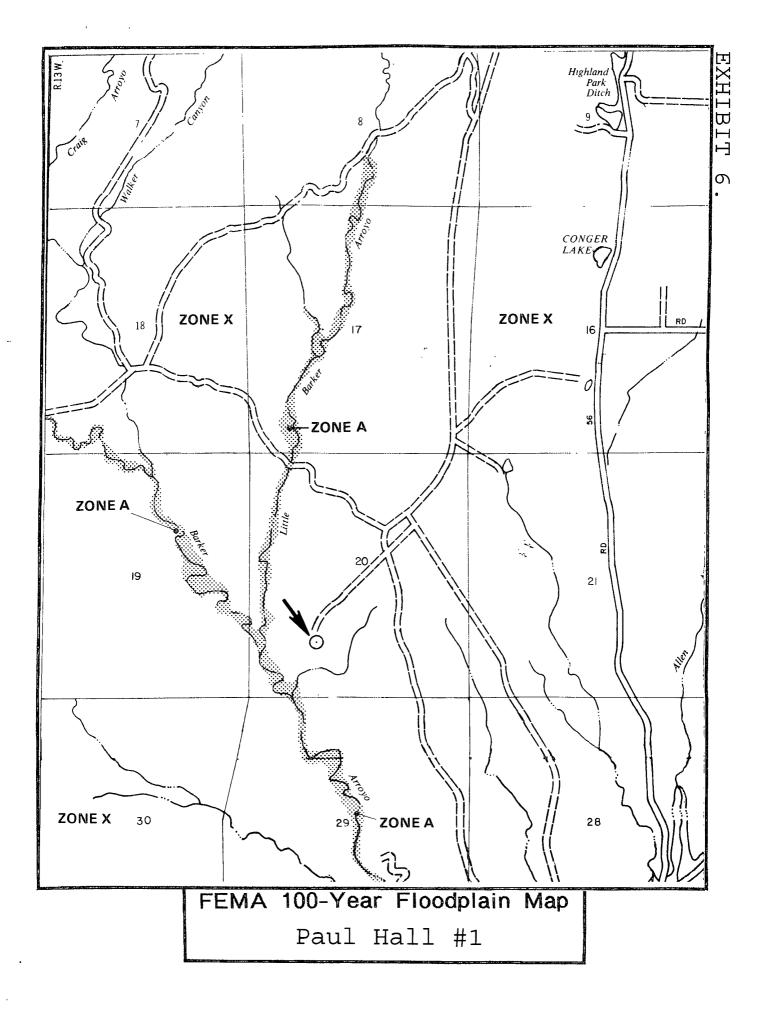


#### Paul Hall #1 Design and Construction Plan

The Paul Hall #1 below grade tank will be designed and constructed in accordance with the following requirements:

- 1. Below grade tank will be designed and constructed to contain liquids and solids, prevent contamination of fresh water and protect the public health and environment (Exhibit 7).
- 2. Stockpile topsoil prior to digging pit, keep separate from subsoil and use as final cover and fill when closing pit.
- 3. Sign-12" by 24" with operator name, lease name, well #, location (unit letter, qtr/qtr, Sect., Twp., and Rge.) and emergency phone #'s will be posted on location. Sign will be posted in a location where it can be easily read.
- 4. Fencing around the Paul Hall #1 below grade tank will be constructed and operated in a manner that prevents unauthorized access and shall be maintained in good condition to protect the public and wildlife. Fencing will include a 4-foot hog wire fencing with two strands of barbed wire or top rail of re-bar or pipe on top. See the attached request for Administrative Approval. The Paul Hall #1 below grade tank is not located within 1000 feet of a house, school, hospital or church.
- 5. The Paul Hall #1 below grade tank will be covered with expanded metal, chicken-wire or a metal lid on top of the tank.
- 6. Paul Hall #1 below grade tank will be designed and constructed to ensure the confinement of liquids and prevent unauthorized releases. Pit will be constructed with a firm foundation and interior slopes, smooth and free of rocks or sharp edges to prevent punctures, cracks or indentations of the liner or tank bottom.
- 7. Paul Hall #1 below grade tank will be constructed of materials resistant to the tank's particular contents and resistant to damage from sunlight.
- 8. Liner will be 30-mil flexible PVC or 60-mil HDPE, string reinforced, impervious material, resistant to UV light, hydrocarbons, salt, acidic or basic liquids. The liner will have a hydraulic conductivity less than 1 x 10-9 cm/sec. Liner compatibility will comply with EPA SW-846.
- 9. The Paul Hall #1 below grade tank will be constructed with single walled sides and bottom which will be open for visual inspection for leaks. The below grade tank will be elevated a minimum of 6-inches above the underlying ground surface. The below grade tank will be underlain with a geo-membrane liner designed to divert any leaked fluid to a visual inspection point. Liner may be covered with gravel.
- 10. The Paul Hall #1 below grade tank will be equipped with a properly operating automatic high-level shut-off control device and manual controls to prevent overflows.
- 11. Diversionary berms, ditches or sloping will be constructed as necessary to prevent overflow and the collection of surface water entrapment.

## Design Plan For Below Grade Tank

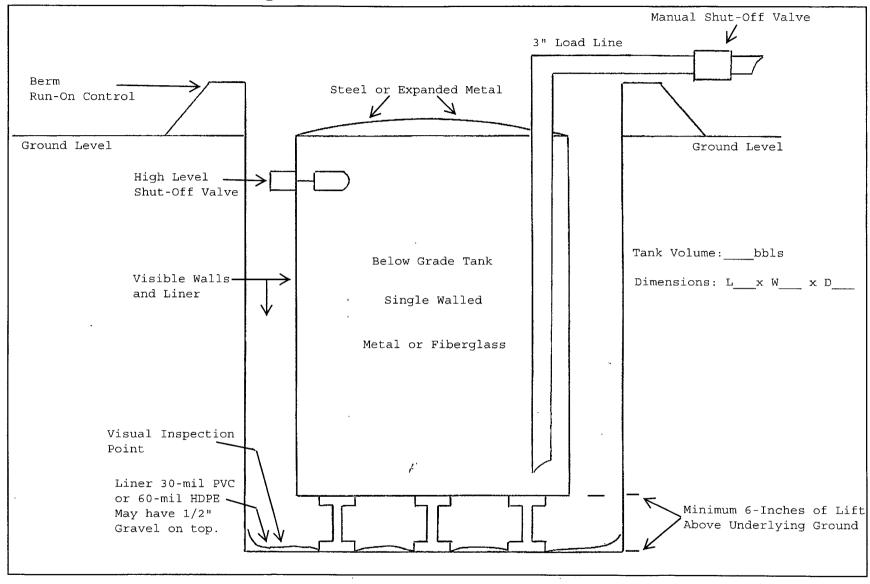

Dugan Production Corp.
Paul Hall #1

#### Paul Hall #1 Operational Requirements

The Paul Hall #1 below grade tank will be maintained and operated in accordance with the following requirements:

- 1. The Paul Hall #1 below grade tank will be operated and maintained to contain liquids and solids and maintain the integrity of the tank / liner system or secondary containment system to prevent contamination of fresh water and protect public health and environment.
- 2. All fluids will be recycled, reused, reclaimed or disposed of in a manner approved by NMOCD rules.
- 3. Do not dispose of solid waste, trash, debris or hazardous material into the pit.
- 4. If the Paul Hall #1 below grade tank develops a leak or if a penetration occurs below the liquids surface, all liquid will be removed above the damage or leak line within 48-hours. The NMOCD office will be notified within 48-hours of the discovery. The below grade tank / liner system or secondary containment system will then be either replaced or repaired.
- 5. Below grade tank will be constructed and operated in a manner that prevents the tank from over flow and prevents surface water from entering the pit. Diversion berms will be constructed around the sides of pit and an automatic high level shut-off will be installed.
- 6. Any measurable oil will be continuously removed from the Paul Hall #1 below grade tank to prevent a significant accumulation of oil overtime.
- 7. The Paul Hall #1 below grade tank will be inspected at least monthly and records of each inspection will be maintained for five years.
- 8. Adequate freeboard will be maintained to prevent overtopping of the Paul Hall #1 below grade tank.

#### Paul Hall #1 Closure Plan-Methods, Procedures and Protocols

1. Comply with deadlines for closure of a pit or below grade tank established by the State of New Mexico, Energy Minerals and Natural Resources Department 19.15.17.13 NMAC, or an earlier date if required by the NMOCD in the case of imminent danger to fresh water, public health or the environment.

Existing On June 16, 2008	Permit Apple Submittal or Modification Request	File Closure Plan By	Stop Use By	Close By
Temporary Pıt - Unlined	Not Permtd under 19.15 17	7/16/2008	Upon drlg rig release	9/16/2008
Permanent Pit - Unlined or Lined	Not permitted with NMOCD	7/16/2008	6-16-2008	12/16/2008
Permanent Pit - Unlined	Permitted or with NMOCD	12-16-2008	6-16-2010	6-16-2011
BGT-Aprvd Design	Not Permtd under 19 15.17	12/16/2008	failed integrity replc	
	Apple by 9-16-2008		w/apprvd design	
BGT-Not Aprvd Design Nor Retrofit to Comply w/19.15 17	Not Permtd under 19.15 17 Mod Rqust by 9-16-2008	12/16/2008	6/16/2013	6-16-2013
BGT-Not Aprvd Design Nor Retrofit to comply w/19.15 17	NA	12/16/2008	6/16/2013	6/16/2013
Permanent Pit-Design and Constr	Mod Rqust by 12-16-2008	12/16/2008 submit w/mod	failed integrity replc	60-days after cessation
Does not comply w/19.15.17 permitted and lined	Comply w/in 18-mos of aprvl	request	wlapprvd design	
Permanent Prt-Design and Constr	Permit Apple by 12-16-2008	12/16/2008 submit w/permit		60-days after cessation
Does not comply w/19.15.17 Registered and Lined	Comply w/in 18-mos of aprvl	Apple		
Permanent Pıt	Permitted under 19 15.17	60-Days prior to close		
Temporary Pit	Permitted under 19.15.17	Prior to closure	Upon drlg rig release	6-mos after rig release
BGT	Permitted under 19.15 17	12/16/2013 or prior to closure	failed integrity replc w/apprvd design	60-days after cessation

- 2. The Paul Hall #1 below grade tank was registered under rule 50; however, it is not an approved design under rule 19.15.17. Upon approval of this application, the existing below grade tank will be closed and a new below grade tank that meets the design requirements of rule 19.15.17 will be constructed.
- 3. Below grade tank will be closed within 60-days after cessation of use.
- 4. Proof of closure notice will be provided by certified mail to surface owner after closure. Proof of notice will be attached to final closure report.

- 5. Remove all liquid from below grade tank prior to closure and dispose of at the Dugan Production operated Sanchez O'Brien #1 SWD (permit SWD-694) located 1650 feet from the South line and 990 feet from the West line (Unit L) of Section 6, Township 24 North, Range 9 West.
- 6. All solids from the below grade tank and all solids removed from the containment pit will be excavated, hauled to and disposed of at either the Envirotech facility (permit #NM-01-0011) facility located in Section 6, Township 26 North, Range 10 West or the IEI facility (permit NM-01-0010B) located in Section 2, Township 29 North, Range 12 West.
- 7. Remove below grade tank and dispose of in a NMOCD approved facility, or recycle, reuse, or reclaim it in a manner that the NMOCD approves.
- 8. On site equipment associated with the below grade tank will be removed unless it is needed for some other purpose.
- 9. Collect a five point, composite sample of the soils beneath the below grade tank (any area that is wet, discolored or shows evidence of a release) to demonstrate that Benzene, BTEX, TPH and chlorides do not exceed the standards as specified in 19.15.17.13.E or the background concentration, whichever is greater.

Components	Test Method	Limit (mg/kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	100
GRO/DRO	EPA SW-846 8015M	NS
Chlorides	EPA 300.1	250 or Background

- 10. The NMOCD will be notified of the testing results on form C-141.
- 11. If it is determined that a release has occurred, rule 19.15.3.116 NMAC and 19.15.1.19 NMAC will be complied with as required.
- 12. If the sampling results demonstrate that a release has not occurred, or that any release does not exceed the concentrations specified above or background concentrations, the pit will be backfilled with compacted, non-waste containing, earthen material.
- 13. Stockpiled sub-surface soil will be used to backfill pit and re-contour (to a final or intermediate cover that blends with the surrounding topography). A minimum of four feet of compacted, non-waste containing, earthen material will be used as backfill.
- 14. Stockpiled surface soil will be used as a cover over the backfilled pit and disturbed area no longer needed for production operations. The soil cover will include either the background thickness of top soil or one foot of suitable material to establish vegetation at the site whichever is greater.
- 15. The area will be re-seeded as per BLM guidelines. Re-seeding will be repeated until 70% of the native natural cover is achieved and maintained for two successive growing seasons. The first growing season after the pit is closed the disturbed area will be re-seeded. The seeding method will be to drill on contour whenever possible.

- 16. The NMOCD will be notified within 60-days of closure of the below grade tank. The closure report will be filed on form C-144 and will document all closure activities, sampling results, a plot plan, and details on backfilling and capping where applicable.
- 17. The NMOCD will be notified once successful re-vegetation has been achieved.

#### Paul Hall #1 Request for Administrative Approval

Administrative approval is hereby requested for an alternative to the fencing design for the Paul Hall #1 below grade tank.

The request for administrative approval cited above is needed to help minimize environmental impact and increase safety and protect wildlife and public health. The alternative proposed will protect fresh water, public health, safety and the environment more effectively than the design and construction specifications established by the State of New Mexico, Energy Minerals and Natural Resources Department do in rule 19.15.17.11 NMAC.

1. The proposed alternative fencing design will include T-posts spaced 10-feet apart. Hog wire / field fence 4-feet in height will be strung tightly and anchored to the top and bottom of each T-post. Small holes (3" high X 6" wide) in the hog-wire will be located at ground level with increasing larger holes (up to 7" high X 6" wide) located at the top of the fence. Anchor braces will be put at all four corners to strengthen and tighten the fence. Two strands of barbed wire or a pipe / re-bar top rail will be constructed above the hog wire. This fence design (developed over the last 30-years) has proven to be very effective controlling unauthorized access to below grade tanks.

The existing rule (19.15.17.11.D.3) would require the operator to fence the below grade tank with a four foot fence that has at least four strands of barbed wire evenly spaced in the interval between on foot and four feet above the ground level. The proposed fencing alternative would provide better security against unauthorized access to below grade tanks. The smaller holes in hog-wire (3" X 6" up to 7" X 6") is more effective at controlling unauthorized access by the public and wildlife than 4-strands of barbed wire spaced 12" apart.

The proposed fence around the below grade tank will be constructed and operated in a manner that prevents unauthorized access and shall maintain the fence in good condition to protect the public and wildlife.

The request for administrative approval cited above is needed to help minimize environmental impact, increase safety and protect wildlife and public health. The alternatives proposed will protect fresh water, public health, safety and the environment more effectively than the design and construction specifications established by the State of New Mexico, Energy Minerals and Natural Resources Department do in rule 19.15.17.11 NMAC.