ODistrict I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.
For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or

Proposed Alternative Method Permit or C	Closure Plan Application
Type of action: Existing BGT Closure of a pit, closed-loop system, below-generated and pit, closed-loop syste	
Instructions: Please submit one application (Form C-144) per individual pit, clo	sed-loop system, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operator of its responsibility to comply with any other control of the comply with any other control of the comply with any other control of the con	
Operator: XTO Energy, Inc.	OGRID#: 5380
Address: #382 County Road 3100, Aztec, NM 87410	
Facility or well name: Schwerdtfeger D#3F	
API Number: 30-045-33536 OCD Permit Num	ıber:
U/L or Qtr/Qtr Section Township 27N Range	IIW County: San Juan
Center of Proposed Design: Latitude 36.5563889 Longitude	
Surface Owner: 🛛 Federal 🗌 State 🔲 Private 🔲 Tribal Trust or Indian Allotment	
Temporary: Drilling Workover Permanent Emergency Cavitation P&A Lined Unlined Liner type: Thickness mil LLDPE HDPE String-Reinforced Liner Seams: Welded Factory Other Volume:	
Closed-loop System: Subsection H of 19.15.17.11 NMAC	
Type of Operation:	E PVC Other RECEIVED RECE
4. Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume: 120 bbl Type of fluid: Produced Water Tank Construction material: Steel Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and Visible sidewalls and liner Visible sidewalls only Other Visible sidewalls,	d automatic overflow shut-off
Liner type: Thicknessmil HDPE PVC Other	
5. Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa	Fe Environmental Bureau office for consideration of approval

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specify	hospital,			
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)				
8. Signs: Subsection C of 19.15.17.11 NMAC ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers ☐ Signed in compliance with 19.15.3.103 NMAC				
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for			
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accepta material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of apply Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dryin above-grade tanks associated with a closed-loop system.				
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☒ No			
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☒ No			
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☑ No ☐ NA			
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No ☐ NA			
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No			
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ⊠ No			
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No			
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ⊠ No			
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ⊠ No			
Within a 100-year floodplain. - FEMA map	☐ Yes ☑ No			

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:
12. <u>Closed-loop Systems Permit Application Attachment Checklist</u> : Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
☐ Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number:(Applies only to closed-loop system that use
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are
attached.
Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC
Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC
Quality Control/Quality Assurance Construction and Installation Plan
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan ☐ Emergency Response Plan
Oil Field Waste Stream Characterization
☐ Monitoring and Inspection Plan ☐ Erosion Control Plan
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
14. Proposed Closure: 19.15.17.13 NMAC
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative
Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only)
On-site Closure Method (Only for temporary pits and closed-loop systems)
In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
15. Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
 ☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC ☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Instructions: Please indentify the facility or facilities for the disposal of liquidifacilities are required.						
Disposal Facility Name:	Disposal Facility Permit Number:					
Disposal Facility Name: Disposal Facility Permit Number:						
Will any of the proposed closed-loop system operations and associated activities ☐ Yes (If yes, please provide the information below) ☐ No						
Required for impacted areas which will not be used for future service and operated Soil Backfill and Cover Design Specifications based upon the appropriate Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Site Reclamatio	ate requirements of Subsection H of 19.15.17.13 NMA on Lof 19.15.17.13 NMAC	С				
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the provided below. Requests regarding changes to certain siting criteria may requested an exception which must be submitted to the Santa Fe Environment demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC	ne closure plan. Recommendations of acceptable soun wire administrative approval from the appropriate dist tal Bureau office for consideration of approval. Justi	rict office or may be				
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; D	ata obtained from nearby wells	☐ Yes ☐ No ☐ NA				
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; D	ata obtained from nearby wells	☐ Yes ☐ No ☐ NA				
Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; D	ata obtained from nearby wells	☐ Yes ☐ No ☐ NA				
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other slake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site	significant watercourse or lakebed, sinkhole, or playa	☐ Yes ☐ No				
Within 300 feet from a permanent residence, school, hospital, institution, or chur Visual inspection (certification) of the proposed site; Aerial photo; Satel	ch in existence at the time of initial application. lite image	☐ Yes ☐ No				
Within 500 horizontal feet of a private, domestic fresh water well or spring that I watering purposes, or within 1000 horizontal feet of any other fresh water well o NM Office of the State Engineer - iWATERS database; Visual inspectio	r spring, in existence at the time of initial application.	☐ Yes ☐ No				
Within incorporated municipal boundaries or within a defined municipal fresh w adopted pursuant to NMSA 1978, Section 3-27-3, as amended. Written confirmation or verification from the municipality; Written appr		☐ Yes ☐ No				
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Vi	sual inspection (certification) of the proposed site	☐ Yes ☐ No				
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mini	ng and Mineral Division	☐ Yes ☐ No				
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geole Society; Topographic map	ogy & Mineral Resources; USGS; NM Geological	☐ Yes ☐ No				
Within a 100-year floodplain FEMA map		☐ Yes ☐ No				
18. On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of by a check mark in the box, that the documents are attached. □ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements □ Construction/Design Plan of Burial Trench (if applicable) based upon the □ Construction/Design Plan of Temporary Pit (for in-place burial of a drying □ Protocols and Procedures - based upon the appropriate requirements of 19 □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements □ Waste Material Sampling Plan - based upon the appropriate requirements □ Disposal Facility Name and Permit Number (for liquids, drilling fluids an □ Soil Cover Design - based upon the appropriate requirements of Subsection □ Re-vegetation Plan - based upon the appropriate requirements of Subsection □ Site Reclamation Plan - based upon the appropriate requirements of Subsection □ Site Reclamation Plan - based upon the appropriate requirements of Subsection □ Site Reclamation Plan - based upon the appropriate requirements of Subsection □ Site Reclamation Plan - based upon the appropriate requirements of Subsection □ Site Reclamation Plan - based upon the appropriate requirements of Subsection □ Site Reclamation Plan - based upon the appropriate requirements of Subsection □ Site Reclamation Plan - based upon the appropriate requirements of Subsection □ Site Reclamation Plan - based upon the appropriate requirements of Subsection □ Site Reclamation Plan - based upon the appropriate requirements of Subsection □ Site Reclamation Plan - based upon the appropriate requirements of Subsection □ Site Reclamation Plan - based upon the appropriate requirements of Subsection □ Site Reclamation Plan - based upon the appropriate requirements of Subsection □ Site Reclamation Plan - based upon the appropriate requirements of Subsection □ Site Reclamation Plan - based upon the appropriate requirements of Subsection □ Site Reclamation Plan - based upon the appropriate requirements of Subsection □ S	equirements of 19.15.17.10 NMAC of Subsection F of 19.15.17.13 NMAC appropriate requirements of 19.15.17.11 NMAC g pad) - based upon the appropriate requirements of 19. 15.17.13 NMAC equirements of Subsection F of 19.15.17.13 NMAC of Subsection F of 19.15.17.13 NMAC d drill cuttings or in case on-site closure standards cannot H of 19.15.17.13 NMAC on I of 19.15.17.13 NMAC	15.17.11 NMAC				

Operator Application Contification		
Operator Application Certification: I hereby certify that the information submitted with this application is	true accurate and complete to th	e hest of my knowledge and helief
Name (Print): <u>Kim Champlin</u>		Environmental Representative
Signature: Kim Champlin		8-29-08
e-mail address: <u>kim_champlin@xtoenergy.com</u>	Telephone:	(505) 333-3100
20. OCD Approval: Permit Application (including closure plan)	CI N (1) 🗆 00D	
OCD Representative Signature:		Approval Date: <u>10-7-08</u>
Title: Enviro/spec	OCD Permit Numb	per:
21. Closure Report (required within 60 days of closure completion): Instructions: Operators are required to obtain an approved closure p The closure report is required to be submitted to the division within 6 section of the form until an approved closure plan has been obtained	olan prior to implementing any c 60 days of the completion of the c d' and the closure activities have l ————————————————————————————————————	closure activities and submitting the closure report. closure activities. Please do not complete this
22.		
Closure Method: ☐ Waste Excavation and Removal ☐ On-Site Closure Method ☐ If different from approved plan, please explain.	Alternative Closure Method	☐ Waste Removal (Closed-loop systems only)
23. <u>Closure Report Regarding Waste Removal Closure For Closed-loc</u> <i>Instructions: Please indentify the facility or facilities for where the l two facilities were utilized.</i>		
Disposal Facility Name:	Disposal Facility Pe	ermit Number:
Disposal Facility Name:		ermit Number:
Were the closed-loop system operations and associated activities perform Yes (If yes, please demonstrate compliance to the items below)		be used for future service and operations?
Required for impacted areas which will not be used for future service of Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique	and operations.	
Closure Report Attachment Checklist: Instructions: Each of the famark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation)	te closure)	
On-site Closure Location: Latitude	Longitude	NAD: [1927 1983
Operator Closure Certification: I hereby certify that the information and attachments submitted with the belief. I also certify that the closure complies with all applicable closure.	is closure report is true, accurate requirements and conditions s	and complete to the best of my knowledge and pecified in the approved closure plan.
Name (Print):	Title:	
Signature:	Date:	
e-mail address:	Telephone:	

DISTRICT I 1625 N. Franch Dr., Hobbs, N.M. 88240

DISTRICT 8 1301 W. Grand Ave., Artesia, N.M. 88210

DISTRICT N 1000 Rio Brazos Rd., Aztec, N.M. 87410

API Number

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION 1220 South St. Francis Dr.

Pool Code

71599

Santa Fe, NM 87505

⁶Property Name

Form C-102 Revised June 10, 2003

DIST. 3

Well Humber

Submit to Appropriate District Office

State Lease - 4 Copies Fee Lease - 3 Copies

1220 South St. Francis Dr., Santa Fe, NM 87505

RECENTED RECEIVED AMENDED REPORT WELL LOCATION AND ACREAGE DEDICATION PLAT DIL CONS. DIU

BASIN DAKOTA

³Poal Name

Property Co.		*Property Name						- 1	weil reumoer		
3585	5	SCHWERDTFEGER D •							3F		
7 OGRID No.		[®] Operator Name							• Elevation		
-167	067	5380 . XTO ENERGY INC.						Į.	6273		
<u> </u>	Surface Location										
UL or lot na	Section	Township	Range	Lot kin	Feet from the	North/South line	Feet from the	East/West II	1 ' 1		
M 21 27-N 11-W 1105 SOUTH 1050 WEST SAN JUAN											
"Bottom Hole Location If Different From Surface											
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line Feet from the East/			ine County		
2 Dedicated Acres	L	J	19 1-1-4 4	<u></u>	Mo		**Order No.	L			
Dedicated Acres	•		¹³ Joint or in	199	¹⁴ Consolidation Co	10e	-Uroar No.				
320	`]								
		MLL BE A	SSIGNE	O TO TH	IS COMPLETION	ON UNTIL ALL	INTERESTS H	AVE BEE	N CONSOLIDATED		
						EEN APPROVE					
16	,	7		/	T T						
SEC. CORNER							11		OR CERTIFICATION		
FD. 2 1/2° BC. 1913 U.S.G.L.O.				1					formation contained herein e best of my knowledge and		
							belief				
									. 1		
					1		ll l		\ //		
						ii					
							Signatur	<u> </u>			
≨			Signature BRIAN WOOD								
5283.2' (M)							Printed	Name	CONSULTANT		
13.2								CONSOLIZATI			
526		JAN. 14, 200						JAN. 14, 2006			
				21 —			Date				
ω ω		1		1			18	SURVEYO	R CERTIFICATION		
00-00-48		1							l location shown on this plot		
8						}	11 7		of actual surveys made by and that the same is true		
8			•				and correct				
z		1		}			/	WYN APR	9 604		
							Daty of	WE WE	KONCOO4		
1050'						(S SAFE	out Alon or	sadamoda Galleka:		
	9			LAT:	36°33′23″ N. · 108′00′50″ \	I (NAD 27) W. (NAD 27)		(1483			
	O]	02 00 00	1	1 1/2	7	1 SH		
	1105							ANOFES	LINES !		
	-	1	•					MOFES	SION		
SEC. CORNER FD. IRON PIPE	-	}		1		SEC. CO FD 2 1/2	BC	14	831		
NO CAP		N 89	-58-50	E 528	6.2' (M)	1913	G.L.O. Certificate	Number			



Pit Permit Siting Criteria Information Sheet

Client:	XTO Energy
Project:	Pit Permits
Revised:	26-Aug-08
Prepared by:	Devin Hencmann

TO DOX 4403, Dataingo,	00 01502	Information Shee	Prepared by: Devin Hencmann			
API#:		3004533536	USPLSS:	27N, 11W, 21M		
Name:	SCHW	/ERDTFEGER D #3F	Lat/Long:	36.5563889/-108.01389		
Depth to groundwater:		>100'	Geologic formation:	Naciemento		
Distance to closest continuously flowing watercourse:	9.2 mile	e N to 'San Juan River		**************************************		
Distance to closest significant watercourse, lakebed, playa lake, or sinkhole:	1.7 mile	es S to Ceder Canyon				
Permanent residence, school, hospital, institution or church within 300'		No	Soil Type:[Entisols		
•			Annual Precipitation:	Bloomfield: 8.71" , Farmington: 8.21", Otis: 10.41"		
Domestic fresh water well or spring within 500'	No		Precipitation Notes:	Historical daily max: Bloomfield (4.19")		
Any other fresh water well or spring within 1000'		No				
Within incorporated municipal boundaries		No	Attached Documents:	27N 11W i-Waters pdf,27N 12W ৷-Waters pdf		
Within defined municipal fresh water well field		No		Topo map pdf, Aerial pdf, Mines and Quarries Map pdf,i-Waters Ground Water Data Map pdf, FEMA flood zone map pdf		
Wetland within 500'		No	Mining Activity:	None		
Within unstable area		No				
Within 100 year flood plain	N	o-FEMA Zone 'X'				
Additional Notes:				1		
		edge of center-pivot rigated cropland		1000' W to irrigation canal		

SCHWERDTFEGER D #3F Below Ground Tank Hydrogeologic Report for Siting Criteria

General Geology and Hydrology

The San Juan Basin is a typical Rocky Mountain basin with a gently dipping southern flank and a steeply dipping northern flank. Asymmetrically layered Tertiary sandstones and shales, along with Quaternary alluvial deposits, dominate surficial geology (Dane and Bachman, 1965). The proposed pit location will be located in the northernmost Bisti region of the San Juan Basin within an area dominated by irrigated fields of the Navajo Indian Irrigation Project. The predominant geologic formation is the Nacimiento Formation of Tertiary age, which underlies surface soils and is often exposed (Dane and Bachman, 1965). Deposits of Quaternary alluvial and aeolian sands occur prominently near the surface of the area, especially near streams and washes.

Cretaceous and Tertiary sandstones, as well as Quaternary alluvial deposits serve as the primary aquifers in the San Juan basin (Stone et al., 1983). In most of the proposed area, the Nacimiento Formation lies at the surface and grades into the Animas Formation to the west. Thickness of the Nacimiento ranges from 418 to 2232 feet (Stone et al., 1983). Aquifers within the coarser and continuous sandstone bodies of the Nacimiento Formation are between 0 and 1000' deep in this section of the basin (Stone et al., 1983). Groundwater within these aquifers flows toward the San Juan River.

The prominent soil type at the proposed site are entisols and aridisols, which are defined as soils that exhibit little to no any profile development (www.emnrd.state.nm.us). Soils are basically unaltered from their parent rock. Miles of arroyos, washes and intermittent streams exist as part of the drainage network towards the San Juan River. These features often cut into soil and other unconsolidated materials, contributing to sedimentation downstream. The sudden influx of water from storm events easily erodes the soils that cover the area.

The climate of the region is arid, averaging just over 8 inches of rainfall annually. As is typical of the southwestern United States monsoonal weather patterns, most precipitation falls from August through October. The heaviest rainfall occurs in the summer in isolated, intense cloudbursts. November through June is relatively dry. Snow generally falls from December to mid-February and averages less than one-half inch in depth. However, most recharge occurs during the winter months during snowmelt periods from the upper elevations (Western Regional Climate Center www.wrcc.dri.edu).

The predominant vegetation is sagebrush and grasses with a more restricted pinon-juniper association (Dick-Peddie, 1993).

Site Specific Hydrogeology


Depth to groundwater is estimated to be greater than 100 feet. This estimation is based on data from Stone and others (1983), the USGS Groundwater Atlas of the United States and depth to groundwater data published on the New Mexico State Engineer's iWaters Database website. Local topography and proximity to surface hydrologic features are also taken into consideration.

Beds of water-yielding sandstone are present in the Nacimiento Formation, which are fluvial in origin and are interbedded with siltstone, shale and coal. Porous sandstones form the principal aquifers, while relatively impermeable shales form confining units between the aquifers (Stone et al., 1983). Local aquifers exist within the Nacimiento Formation at depth s greater than 100 feet and thicknesses of the aquifer can be up to 3500 feet (USGS, Groundwater Atlas of the US).

The site in question is located on the relatively flat mesa top at an elevation of approximately 6290 feet and approximately 5.6 miles east of Gallegos Canyon. Broad shalely hills are interspersed with occasional sandstone outcrops, and systems of dry washes and their tributaries are evident on the attached aerial image. Groundwater is expected to be shallow within Gallegos Canyon. But the significant distance between the Canyon and the site, as well as an elevation difference of almost 400 feet suggest groundwater is greater than 100 feet at the proposed site.


Lined channels associated with the Navajo Irrigation Project supply water for the fields surrounding the proposed site, which are characterized by center-pivot irrigation patterns. During spring and summer, irrigation practices often produces shallow perched aquifers that are not defined in published literature. These shallow zones of water are not continuous and are not saturated year round.

Groundwater data available from the NM State Engineer's iWaters Database for wells near the proposed site are attached. Wells located at similar elevations within the irrigated area contain groundwater greater than 100 feet deep. A map showing the location of wells in reference to the proposed pit location is attached.

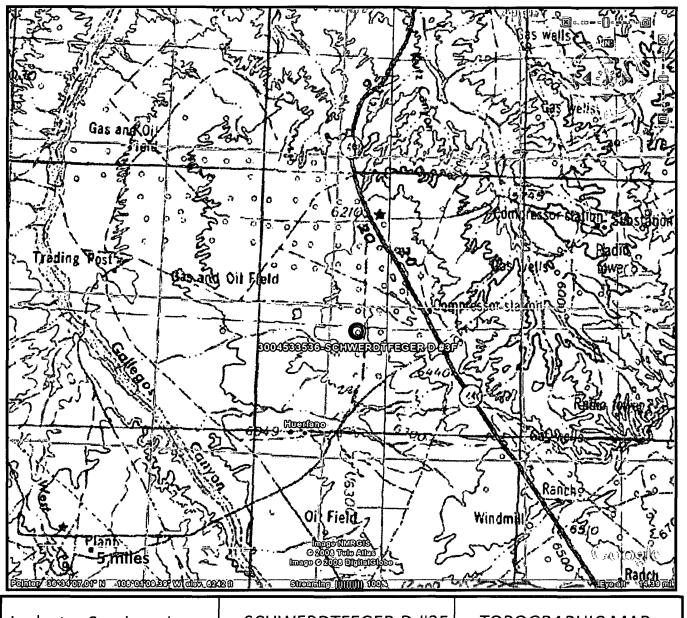


SCHWERDTFEGER D #3F T27N, R11W, S21M San Juan county, NM


TOPOGRAPHIC MAP

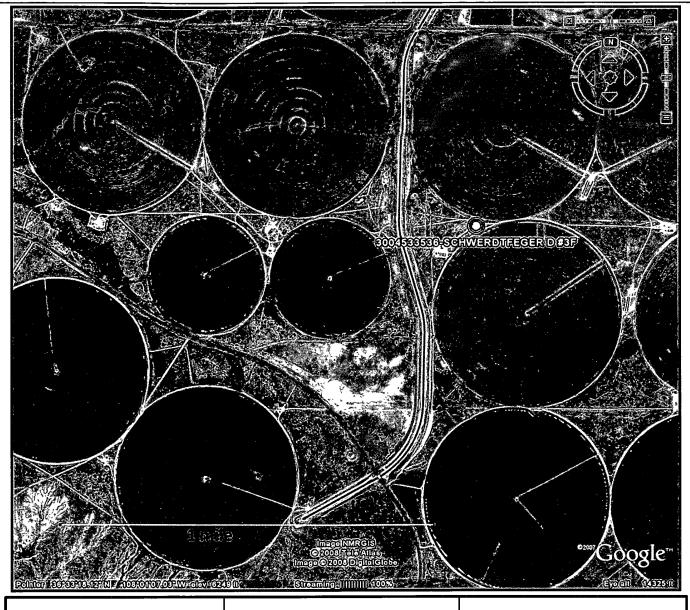

SCHWERDTFEGER D #3F T27N, R11W, S21M San Juan county, NM **AERIAL PHOTOGRAPH**

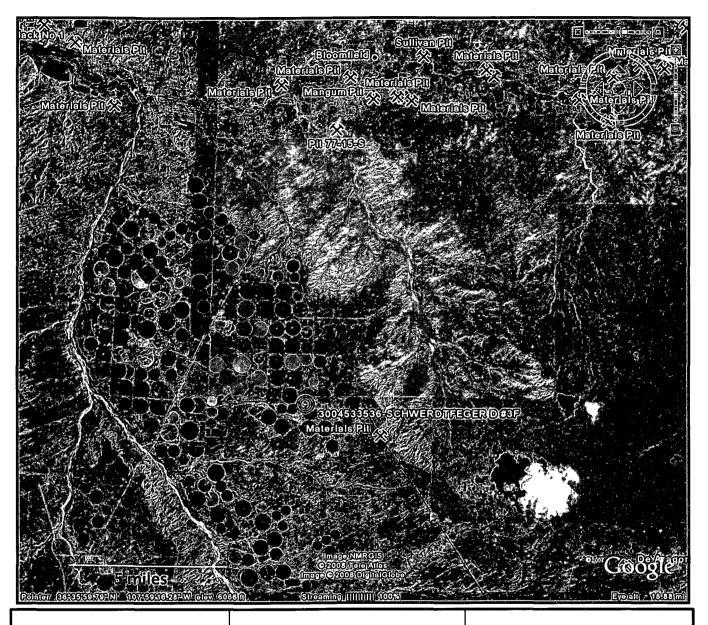

SCHWERDTFEGER D #3F T27N, R11W, S21M San Juan county, NM Mines and Quarries Map

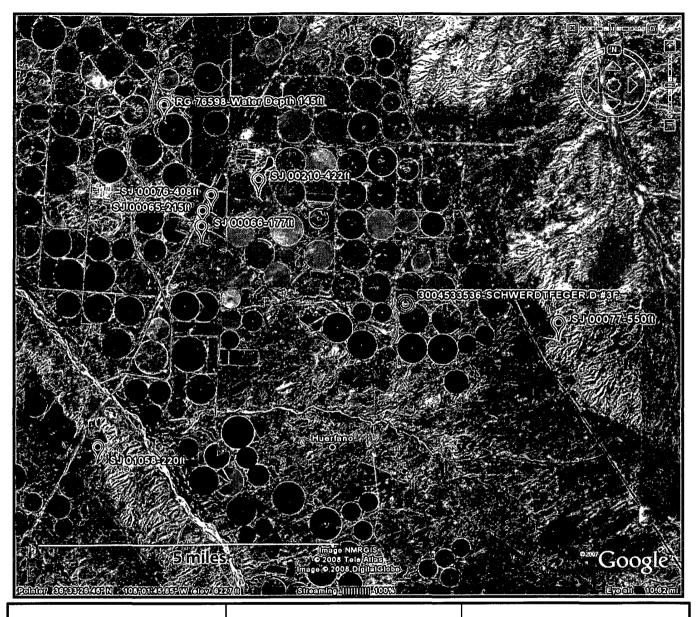

SCHWERDTFEGER D #3F T27N, R11W, S21M San Juan county, NM i-Waters Ground Water Data Map


New Mexico Office of the State Engineer POD Reports and Downloads

POD / Surface Data ReportAvg Depth to Water ReportWater Column Report

WATER COLUMN REPORT 03/22/2008

	(quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest)						Depth	Depth	Water	(in feet)
POD Number	Tws	Rng Sec	व्यव्य		X	Ā	Well	Water	Column	
SJ 01787	27N	11W 07	2 2				€50			
SJ 00077	27N	11W 2€	2 1 3				1102	550	552	

Record Count: 2

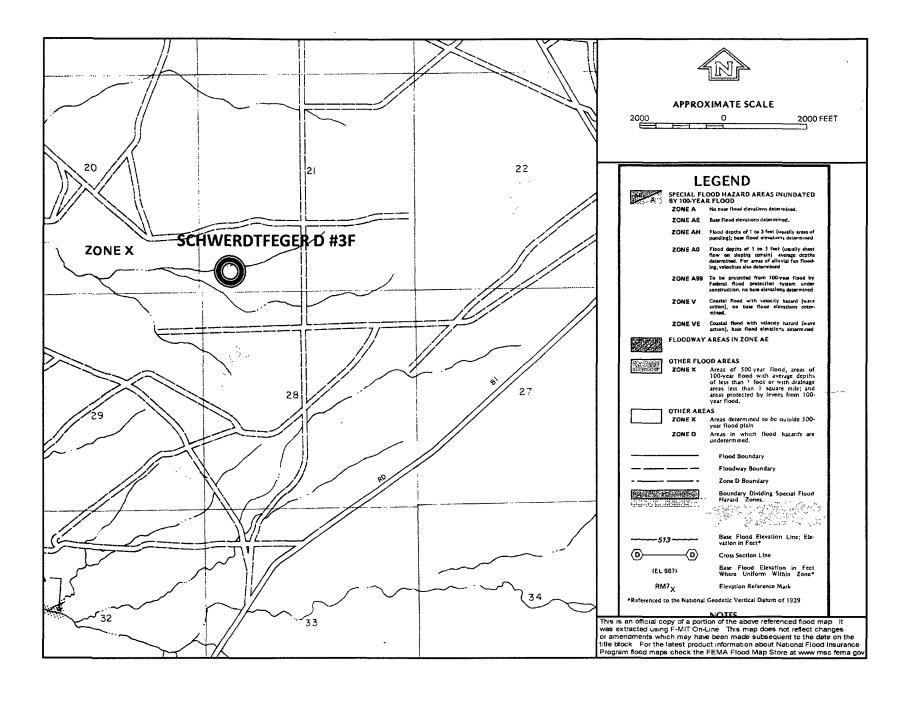

XTO Energy Inc. San Juan Basin Below Grade Tank Design and Construction Plan

In accordance with Rule 19.15.17.11 NMAC the following information describes the design and construction of below grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below grade tanks. A separate plan will be submitted for any below grade tank (BGT) which does not conform to this plan.

General Plan

- XTO will design and construct a BGT to contain liquids and solids and prevent contamination of fresh water and protect public heath and environment.
- 2. Prior to constructing the pit, topsoil will be stockpiled in the construction zone for later use in restoration.
- 3. XTO will post a well sign, in compliance with 19.15.3.103 NMAC, on the well site prior to construction of the BGT. The sign will list the Operator on record as the operator, the location of the well site by unit letter, section, township, range, and emergency telephone numbers.
- 4. XTO shall construct all new fences utilizing 48" steel mesh field-fence (hogwire) on the bottom with two strands of barbed wire on top, or with a pipe top rail. A 6' chain link fence topped with three stands of barbed wire will be used if the well location is within 1000' of a permanent residence, school, hospital, institution or church.
- 5. XTO shall construct an expanded metal covering on top of the BGT.
- 6. XTO will ensure that a BGT is constructed of materials resistant to the BGT's particular contents and resistant to damage from sunlight.
- 7. The BGT system will have a properly constructed foundation consisting of a level base free of rocks, debris, sharp edges or irregularities to prevent punctures, cracks or indentations of the liner or tank bottom.
- XTO will construct a berm and/or diversion ditch in a manner that prevents the collection of surface water run-on.
- 9. XTO will construct and use BGT that does not have double walls. The BGT sidewalls will be open for visual inspection for leaks, the BGT bottom will be elevated a minimum of 6" above the underlying ground surface and the BGT will be underlain with a geomembrane liner to divert leaked liquid to a location that can be visually inspected.
- 10. XTO will equip BGT's designed in this manner with a properly functioning automatic high-level shut-off control device and manual controls to prevent overflows.
- 11. The geomembrane liner shall consist of 30-mil flexible PVC or 60-mil HDPE liner, or an equivalent liner material that the appropriate division district office approves. The geomembrane liner shall have a hydraulic conductivity greater that 1 x 10-9 cm/sec. The geomembrane liner shall be composed of an impervious, synthetic material that is resistant to petroleum hydrocarbons, salts and acidic and alkaline solutions. The liner material shall be resistant to ultraviolet light. Liner compatibility shall comply with EPA SW-846 method 9090A.
- 12. The general specifications for design and construction are attached.

XTO Energy Inc. San Juan Basin Below Grade Tank Maintenance and Operating Plan

In accordance with Rule 19.15.17.11 NMAC the following information describes the operation and maintenance of below grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below grade tanks. A separate plan will be submitted for any below grade tank (BGT) which does not conform to this plan.

General Plan

- 1. XTO will operate and maintain a BGT to contain liquids and solids and prevent contamination of fresh water and protect public health and the environment.
- 2. XTO will not allow a BGT to overflow and will use berms and/or diversion ditch to prevent surface run on to enter the BGT.
- 3. XTO will continuously remove any visible or measurable layer of oil from the fluid surface of a BGT in order to prevent significant accumulation of oil.
- 4. XTO will inspect the BGT monthly and maintain written records for five years.
- 5. XTO will maintain adequate freeboard to prevent over topping of the BGT.

XTO Energy Inc. San Juan Basin Below Grade Tank Closure Plan

In accordance with Rule 19.15.17.11 NMAC the following information describes the closure requirements of below grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below grade tanks. A separate plan will be submitted for any below grade tank (BGT) which does not conform to this plan.

General Plan

- XTO will close a BGT within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the division requires because of imminent danger to fresh water, public health or the environment.
- 2. XTO will close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.
- 3. XTO will close a permitted BGT within 60 days of cessation of the BGT's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on form C-144.
- 4. XTO will remove liquids and sludge from a BGT prior to implementing a closure method and will dispose of the liquids and sludge in a division-approved facility.
- 5. XTO will remove the BGT and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.
- 6. XTO will remove any on-site equipment associated with a BGT unless the equipment is required for some other purpose.
- 7. XTO will test the solids beneath the BGT to determine whether a release has occurred. At a minimum 5 point composite sample will be collected along with individual grab samples from any area that is wet, discolored or showing other evidence of a release. Samples will be analyzed for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 100mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. XTO will notify the division of its results on form C-141.
- 8. If XTO or the division determines that a release has occurred, XTO will comply with 19.15.3.116 NMAC and 19.15.1.19NMAC as appropriate.
- 9. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, XTO will backfill the excavation with compacted, non-waste containing, earthen material; construct a division prescribed soil cover; recontour and re-vegetate the site.
- 10. Notice of Closure will be given to the Aztec Division District III office between 72 hours and one week of closure via email or verbally. The notification will include the following:
 - i. Operator's name
 - Location by Unit Letter, Section, Township, and Range. Well name and API number.

- 11. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the BGT. Closure report will be filed on form C-144 and incorporate the following:
 - i. Details on capping and covering, where applicable
 - ii. Inspection reports
 - iii. Sampling results
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding area. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be placed in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. XTO will seed the disturbed areas the first growing season after the operator closes the pit.

 Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will be used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.
- 14. A minimum of 4' of cover shall be achieved and the cover shall include 1' of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.
- 15. The surface owner shall be notified of XTO's proposal to close the BGT as per the approved closure plan using certified mail, return receipt requested.