#### SUBMIT IN TRIPLICATE.

Form approved. Budget Bureau No. 42-R1425.

5. LEASE DESIGNATION AND SERIAL NO.

(Other Instructions on reverse side)

# **UNITED STATES** DEPARTMENT OF THE INTERIOR

**GEOLOGICAL SURVEY** 

GEOLOGICAL SURVEY							Contract No. 360			
APPLICATIO	N FOR PERMIT	TO DRILL, DI	EEP	EN, OR PLUG B	ACK	1 .		D OR TRIBE NAME		
1a. TYPE OF WORK					<del></del>	Jicar	cilla i	Apache		
	RILL 🔯	DEEPEN [		PLUG BAC	CK 🗌	7. UNIT A	GREEMENT 1	AME		
	IAB [			Ingle   Multip	rm [	6	G De Lease na			
2. NAME OF OPERATOR	VELLOTHER		Z	ONE L ZONE	<u> </u>	_ [ ~	n Ami			
JACK A. CO	LE					9. WELL I		305		
3. ADDRESS OF OPERATOR		· · · · · · · · · · · · · · · · · · ·		· · · · · · · · · · · · · · · · · · ·	-	l	<del>=</del> 2 ⋅			
P. O. Box	191 Farm	ington, N.M	ι.	87401				OR WILDCAT		
4. LOCATION OF WELL (B	deport location clearly an	d in accordance with	any i	State requirements.*)				Associate		
1850	0'FSL, 990'F	EL		RECEIVE	$\supset$ $\Box$	11. SEC., 2	, R., M., OR	BLE.		
At proposed prod. zor	ne					Secti	jon 2-	22N-R3W		
	Same			<u>JUL 8 1980</u>			ē N.M.I	P.M.		
	AND DIRECTION FROM NE	5				1		13. STATE		
32 MILES NO				i.GOCECLOCICAL SUR		Sando	val	N.M.		
LOCATION TO NEAREST PROPERTY OR LEASE 1	T		6. NO	o. of abelia Cholease	17. NO TO T	OF ACRES ASS HIS WELL	·	* * * * * * * * * * * * * * * * * * *		
(Also to nearest drl;	g. unit line, if any)	3430'		2541			160			
	RILLING, COMPLETED,	2800'	9. PE	7120 '	20. ROTA	RY OR CABLE				
OR APPLIED FOR, ON THE 21. ELEVATIONS (Show wh		2000		7120	ä	<u>문 교육</u>	Rota			
	151 DF, 7152	'KB			- ja 4	ZZ. APPR	9/1/	RE WILL STARTS		
23.	·	<del></del>				<u> 네 하는</u>	<u> </u>			
		PROPOSED CASING	ANI	CEMENTING PROGRA	M E					
BIXE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	<u> </u>	SETTING DEPTH	8 1	L QUANT		the state of the s		
12-1/4" 7-7/8"	8-5/8" 4-1/2"	24.0	_	250'				surface		
1-1/0	4-1/2"	10.50&11.6	<u>U</u>	7120'		sacks				
				This action is subject			- 2	stages		
				appeal pursuant to 30				<u> </u>		
		Dakota Format	ior	will be perfor	rated a	and stin	mulated			
as necessary.	,			•	į, ž	75				
EXHIBITS					es. Sfig.	19.00 10 10 10 10 10 10 10 10 10 10 10 10 1	본거를 걸	<u>.</u>		
EVUTPITE					ين ته			<b>-</b> 84		
"A" - Iocatio	on and Elevatio	n Plat		"F" - Acces	e Pos	e de la constant de	ntion			
	nt Compliance		"E" - Access Road to Location " " - Radium Map of Field " - "							
"C" - Blowout	Preventer Dia	gram						The state of the s		
	oint Requireme		"G" - Drill Rig Layout "H" - Fracturing Program Layout "B" OPERATIONS AUTHORIZED ATTACHED							
		4	-	OPERATION	OHIUA 2	LE ATTACHE	Ð			
The gas for t	his well is co	mmitted.	F			S. 1.	- 1 7	한 <b>수 한</b> 참 중 분		
m - m /		/01		GENERAL REQUIREM	VEHIO SE					
The SE/4 Sect	ion 2 is dedic	ated to this	we1			t <u>.</u>				
IN ABOVE SPACE DESCRIBE	PROPOSED PROGRAM: If	proposal is to deepla	JG.	lug hackowike data on pre	sent nrod	netive sone	and marross	d naw production		
one. If proposal is to	drill or deepen direction	ally, give pertinent de	ata o	publisherace locations and	measure	d and true ve	rtical depth	s. Give blowout		
24. EYOD. TACK A	COLE OBICINAL	SIGNED BY CH		1980 A 1980 Option race locations and the state of the st	Encer	E				
TOR. UACK A	EWELL N	WALSH	. P	roduction Corp.	i magi.	• CX	7/7/	/80		
signed	Walsh P.E.	TITLE				DATE				
(This space for Fade	ral or State office use					*** :	<del>-</del> .	ar All as		
PERMIT PAS AM	VENINED 1	•				***				
			-	APPROVAL DATE	F.F.	<u> </u>	<del></del>			
APPROVED, ST AUG	<u>0 k 1980</u>	TITLE			 <del></del> .	2 2 2 m		ā - ā		
CONDITIONS OF APPROX	Vitta /				ا اسم اسم		La (2) 12 5 1	: F.O		
POPULATES	F. SIMSM					ag 77				
DISTRICT	ENGINEER					<b>=</b> %	ئىسىشى ئات ب	<b>₩</b>		
		**		O B C: I						

•		All distances	must be from	n the cute	e haundniten e	I the Section	,		
Operator	•			Lease				Well No.	· · · · · · · · · · · · · · · · · · ·
JACK A. COLE			CHACON AMIGOS				2	•	
Unit Letter	Section	Township		Homo		County			
1	2	22N			3W	1 .	ndoval		
Actual Footage Loc				1				<del></del>	
1850	feet from the So	uth	line and	990		eet from the	East	line	
Ground'Level Elev.	Producing For		line cand	Pool		eet from the		Dedicated Acreage	····
7138	Dakota				Dakota A	Associate	a	160	
	e acreage dedica	<del></del>						L.,	Acres
<ol> <li>If more the interest and</li> <li>If more that</li> </ol>	an one lease is	dedicated to	o the well,	outline	each and id	lentify the	ownership tl	hereof (both as	_
Yes  If answer if this form if No allowab		owners and t	s;' type of tract descri	consoli ptions v	which have a	consolidat	ed (by com	munitization, w	nitization,
	f 1			<i>-</i>				CERTIFICATION	
	1			i i		·	toined her best of my FOR: J	erity that the information is true and come on the knowledge and belaCK A. COLE	plete to the lief.
	i				 		Name EV	<b>FELL N. WALSH</b>	
<b></b>			- Tas				Ewell N	. Walsh, P.E	
1			(A)	1	1		Position		
l	j	· .		ا أَ الْحَالَ عَلَىٰ الْمُ	· \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \		Preside	nt	
1	.]			<sub>F</sub> 3	bac 🕴 -	l.	Company		
	i		1 30	E i	i j		Walsh E	ngr. & Prod.	Corp.
	į		<b>A</b>	1 374	com.		Date		
	l S	ec.	1000	DIST.	3 /			7/7/80	. •
		225	55555 SEE 1	errecce.		<i>30000000000</i>		-	•
			2		1850'	90 <b>'</b>	shown on notes of under my is true a knowledge  Date Survey	TALL HAR SIL	d from field le.by me or at the same
•	i	<b>.1</b> 0.	eggegggggggggggggg	*********	in a man		PSECK!	XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX	
				Million.			Certification	THE STATE OF THE S	
	1220 1000 1000					<del></del>	3950	O KERN.	

## EXHIBIT "B"

## TEN-POINT COMPLIANCE PROGRAM

#### OF NTL-6 APPROVAL OF OPERATIONS

Attached to Form 9-331C

JACK A. COLE CHACON AMIGOS NO. 2

1850'FSL, 990'FEL, SECTION 2-T22N-R3W

Sandoval County, New Mexico

## The Geologic Surface Formation

Nacimento

## Estimated Tops of Important Geologic Markers

Ojo Alamo	2257 <b>'</b>	Point Lookout	4697'
Pictured Cliffs	2617'	Gallup	5727 <b>'</b>
Chacra	3377 <b>'</b>	Graneros	6782 <b>'</b>
Cliff House	3117'	Dakota	6817 <b>'</b>

# Estimated Depths of Anticipated Water, Oil, Gas or Minerals

Ojo Alamo - 2257', Water
Pictured Cliffs - 2617', Gas
Gallus - 5727', Minor Gas and Oil
Dakota - 6817', Gas and Oil

## The Proposed Casing Program

Hole Size	Interval	Section Length	Size (OD)	Weight, Grade and Joint	or Used
12¼"	0'-250'	<b>250</b> '	8-5/8" 24	# K-55 8 round ST&C	New
7-7/8"	0'-6050'	6050 <b>'</b>	4½"10.50#	K-55 8 round ST&C	New
7-7/8"	6050'-7120'	1200	4 <b>½"11.</b> 60#	K-55 8 round ST&C	New

# Coment Program

Surface - 8-5/8": 250 Sacks Class "B", 3% CaCl<sub>2</sub> & 1/4 lb. Flocele per sack.

Production - 4-1/2 " First Stage - 500 gallons Mud Flush followed by 370 sacks 50/50 Pozmix, (2% Gel) with 6-1/4 lbs. Gilsonite and 6 lb. salt per sack. Calculated top of cement at 5550'.

Second Stage -500 gallons Mud Flush followed by 140 sacks 65/35 Pozmix (12% Gel), with 6-1/4 lbs.
Gilsonite followed by 50 sacks Class "B" Neat Cement. Stage Tool at 2900'. Calculated top of cement at 2100'.

# 5. The Operator's Minimum Specifications for Pressure Control

EXHIBIT "C" is a schematic diagram of the blowout preventer equipment. The BOP's will be hydraulically tested to the full working pressure after nippling up and after any use under pressure. Pipe rams will be operationally cheeked each 24-hour period, as will blind rams each time pipe is pulled out of the hole. Such checks of BOP will be noted on daily drilling reports.

Accessories to BOP will include floor safety valve, and choke manifold with pressure rating equivalent to the BOP stack.

# 6. The Type and Characteristics of the Proposed Circulating Muds

Mud system will be gel-chemical with adequate stocks of sorptive agents on site to handle possible spills of fuel and oil in the surface. Heavier muds will be on location to be added if pressure requires.

Interval		Туре	Weight/Gal.	Viscosity (Sec.)	Water Loss	Additives
0-250' 250'-T.D.	•	Gel-Water 10% Oil Base	9.0 8.8-9.2	50 42	4.0	Lime Gel, Thinner, CMC, Oil

# The Auxiliary Equipment to be Used

- (a) A float will be used at the bit.
- (b) The mud system will be monitored visually.
- (c) A stabbing valve will be on the floor to be stabbed into the drill pipe when kelly is not in the string.

Walsh ENGINEERING & PRODUCTION CORP.

# 8. The Testing I gring and Coring Programs to be Followed

- (a) DST None
- (b) Logging ISF 250'-T.D. CNL-FDC 2200' and 5500' T.D.
- (c) Coring None


# 9. Any Anticipated Abnormal Pressures or Temperatures

No abnormal pressures or temperatures have been noted or reported in wells drilled in the area nor at the depths anticipated in this well. Bottom hole pressure expected is 3100 psig.

No hydrogen sulfide or other hazardous fluids or gases have been found, reported or known to exist at these depths in the area.

# 10. Anticipated Starting Date and Duration of the Operations

The anticipated starting date is set for September 1, 1980 or as soon as possible after examination and approval of drilling requirements. Operations should be completed within Ten days.

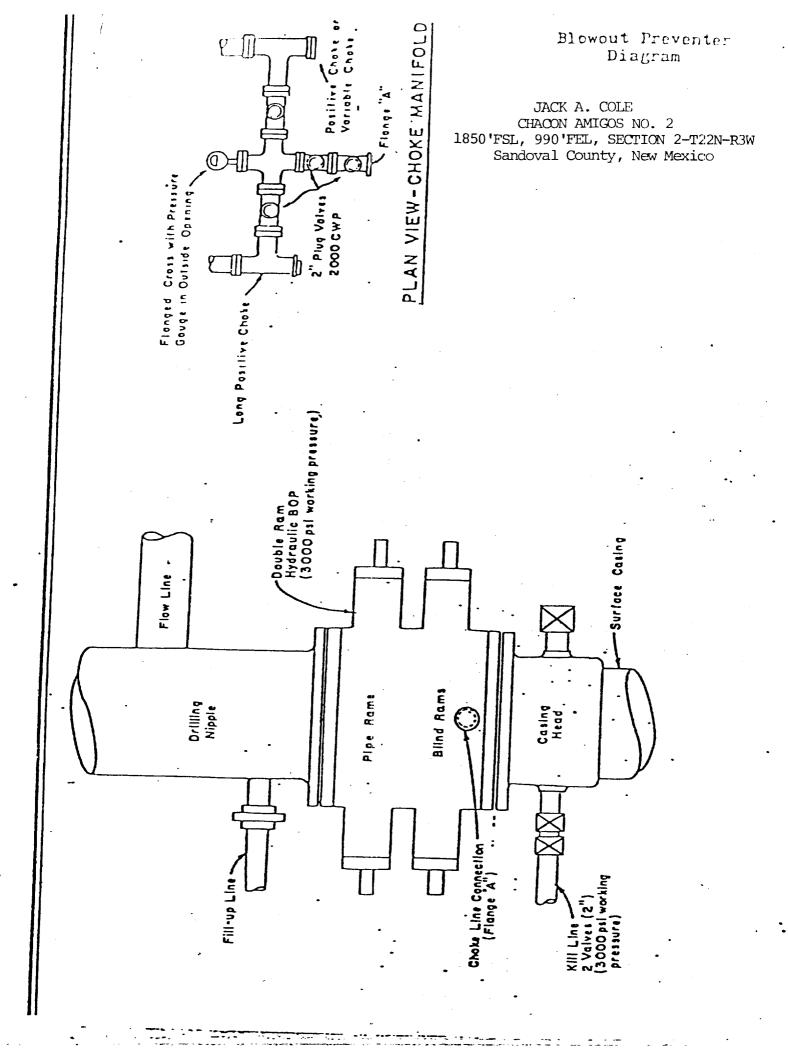

## EXHIBIT "D"

#### MULTI-POINT REQUIREMENTS TO ACCOMPANY A.P.D.

Attached to Form 9-331C JACK A. COLE CHACON AMIGOS NO. 2 1850'FSL, 990'FEL, SECTION 2-T22N-R3W Sandoval County, New Mexico

## Existing Roads

- A. The proposed well site and elevation plat is shown as EXHIBIT "A".
- B. Directions: South on Highway 44 from Bloomfield, New Mexico 65 miles. Turn left on State Road 537 (Dulce Road) 3-1/4 miles. Turn right on dirt road (Jicarilla J-20) 5 miles. Turn right at road fork 2-1/2 miles, turn left (Jicarilla J-22) 2-1/2 miles. Turn right 1/2 mile to location.
- C. All roads to location are indicated On Exhibit "E". Existing roads will be improved.
- D. Exploratory wells, existing roads: N/A
- E. Development wells, existing roads: See Exhibit "E"
- F. Improvement and maintenance: Existing roads need no improvement. Access road will be improved and maintenance till be performed as required.

#### Planned Access Roads

Exhibit "E" Access road, 1/2 mile, will have maximum width of 20'. No turnouts, no culverts, no gates, cattle guards or fence cuts. Surfacing material will be nature soil.

#### Location of Existing Wells

For all existing wells within one mile radius of development well, see EXHIBIT "F".

- (1) There are no water wells within a one mile radius of this location.
- (2) There is one abandoned well in this one mile radius.

Walsh ENGINEERING & PRODUCTION CORP

- (3) There are no temporarily abandoned wells.
- (4) There are no disposal wells.
- (5) There are no wells presently being drilled.
- (6) There are 9 producing wells within this one mile radius.
- (7) There are no shut-in wells.
- (8) There are no injection wells.
- (9) There are no monitoring or observation wells for other uses.

# 4. Location of Existing and/or Proposed Facilities

- A. Within One mile radius of location, the following existing facilities are owned or controlled by lessee/operator:
  - (1) Tank Batteries: One
  - (2) Production Facilities: One
  - (3) 0il Gathering Lines: None
  - (4) Gas Gathering Lines: None
  - (5) Injection Lines: None
  - (6) Disposal Lines: None
- B. If production is obtained, new facilities will be as follows:
  - (1) All production facilities will be located on the pad.
  - (2) All well flow lines will be buried and will be on the well site and battery site.
  - (3) Drill pad will be 300 feet long and 155 feet wide.
  - (4) No construction materials for battery site and pad will be necessary.
  - (5) Any necessary pits will be fenced and flagged to protect livestock and wildlife.
  - (6) Rehabilitation whether well is productive or dry, will be made on all unused areas in accordance with BIAstipulations.

## 5. Location and Type of Water Source

- A. The source of water will be NW/4, Section 15-T23N-R3W
- B. Water will be transported by truck over existing roadways.
- C. No water well is to be drilled on this lease.

#### Construction Materials

- A. No construction materials are needed for drilling and access roads into the drilling location unless production is obtained. The surface soil materials will be sufficient or will be provided by the Dirt Contractor as needed.
- B. No construction materials will be taken off Federal or Indian Lands.
- C. All surface soil materials for construction of access roads are sufficient.
- D. All major access roads presently exist as shown on EXHIBIT "E".

#### 7. Handling of Waste Materials and Disposal

- (1) Drill cuttings will be buried in the reserve pit and covered.
- (2) Drilling fluids will be handled in the reserve pit.
- (3) Any fluids provided during drilling test or while making production test will be collected in a test tank. If a test tank is not available during drilling, fluids will be handled in reserve pit. Any spills of oil, gas, salt waters or other noxious fluids will be cleaned up and removed.
- (4) Chemical facilities will be provided for human waste.
- (5) Garbage and non-flammable waste and salts and other chemicals produced during drilling or testing will be handled in trash pit. Flammable waste will be disposed of in burn pit. Drill fluids, water drilling mud and tailings will be kept in reserve pit, as shown on EXHIBIT "G". Reserve pit will be fenced on three sides and the fourth side fenced upon removal of the rig.
- (6) After the rig moves out, all materials will be cleaned up and no adverse materials will be left on location. Any dangerous open pit will be fenced during drilling and kept closed until such time as the pit is leveled.

## Ancillary Facilities

No air strip, camp or other facilities will be built during drilling of this well.

#### Well Site Layout

(1) EXHIBIT "G" is the Drill Pad Layout.

Topsoil, if removal required, will be stockpiled per specifications determined at time of pre-drill inspection.

- (2) EXHIBIT "G" is a plan diagram of the proposed rig and equipment reserve pit, burn and trash pit, pipe racks and mud tanks. No permanent living facilities are planned. There will be a trailer on site.
- (3) The reserve pits will not be lined. Steel mud tanks may be used during drilling operations.

#### 10. Plans for Restoration

- (1) Backfilling, leveling and contouring are planned as soon as all pits have dried. Waste disposal and spoils materials will be buried or hauled away immediately after drilling is completed. If production is obtained, the unused area will be restored as soon as possible.
- (2) The soil banked material, if removal required, will be spread over the area. Revegetation will be accomplished by planting mixed grasses as per formula provided by the BIA.
- (3) Three sides of the reserve pit will be fenced during drilling operations. Prior to rig release, the reserve pit will be fenced on the fourth side to prevent livestock or wildlife from becoming entrapped; and the fencing will be maintained until leveling and cleanup is accomplished.
- (4) The rehabilitation operations will begin as soon as possible after the drilling rig is removed. Removal of oil or other adverse substances will begin immediately or area will be flagged and fenced. Other cleanup will be done as needed. Planting and revegetation is considered best from July 15 to September 15, unless requested otherwise.

## 11. Other Information

- (1) Soil Sandy, Clayey, Loam Vegetation - Sage, Snake Weed, Rabbit Brush, and Squirrel tail.
- (2) The primary surface use is for grazing. The surface is owned by the Jicarilla Indian Tribe.
- (3) The closest live water is the None

The closest occupied dwellings - 2 miles

There are no known archaeological, historical, or cultural heritages that will be disturbed by this drilling.

- (4) Restrictions: Operator has all rights from surface through base of Dakota.
- (5) Drilling is planned for on or about September 1, 1980Operations should be completed within 20 days.

# 12. Lessee's or Operator's Representative

Ewell N. Walsh, P.E. President Walsh Engineering & Production Corporation P. O. Box 254 Farmington, New Mexico 87401 Telephone: (505) 327-4892, 24 hrs.

#### 13. Certification


I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by JACK A. COLE and its contractors and subcontractors in coformity with this plan and the terms and conditions under which it is approved.


ORIGINAL SIGNED BY EWELL N. WALSH

July 7, 1980


Date

Ewell N. Walsh, P.E.
President
Walsh Engineering & Production Corp.

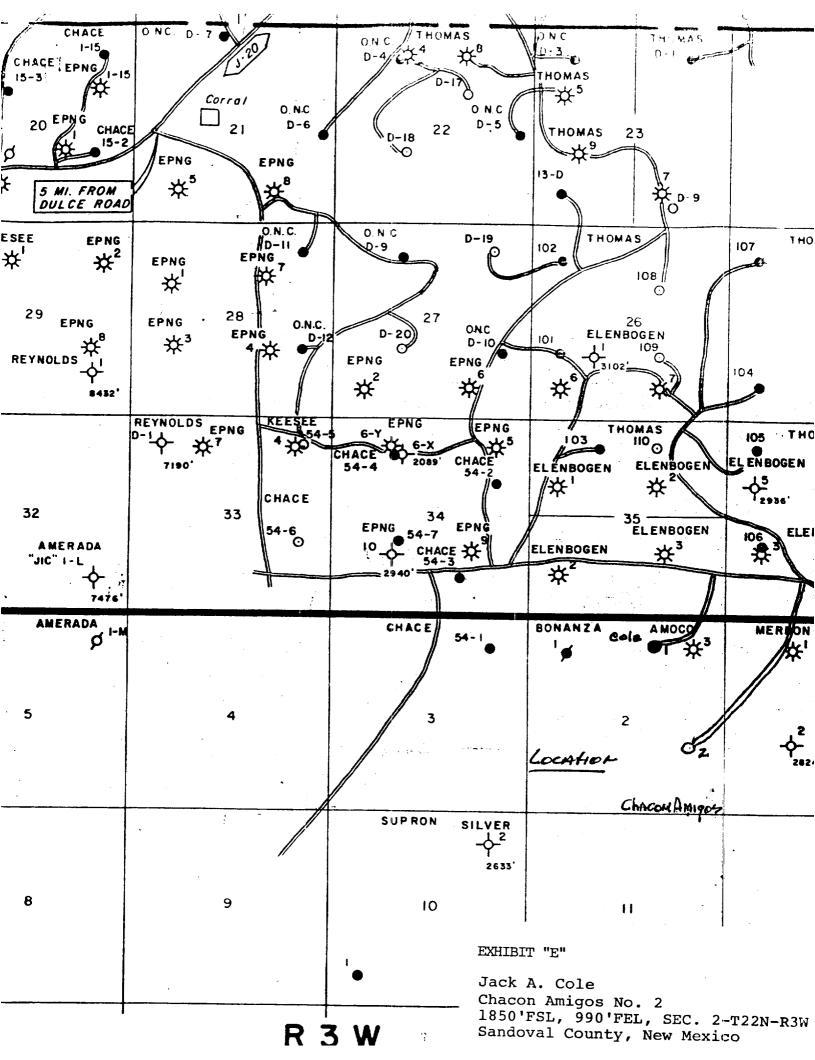

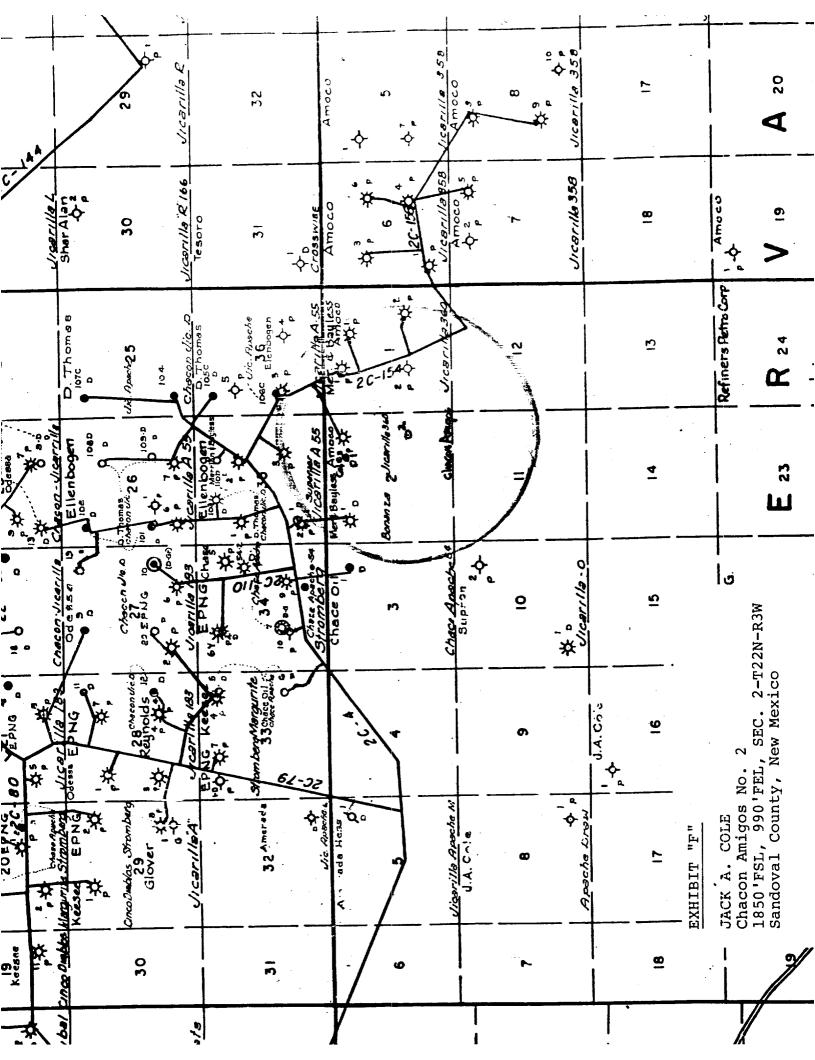

Drill Rig Layout JACK A. COLE CHACON AMIGOS NO. 2 1850'FSL, 990'FEL, SECTION 2-T22N-R3W Sandoval County, New Mexico

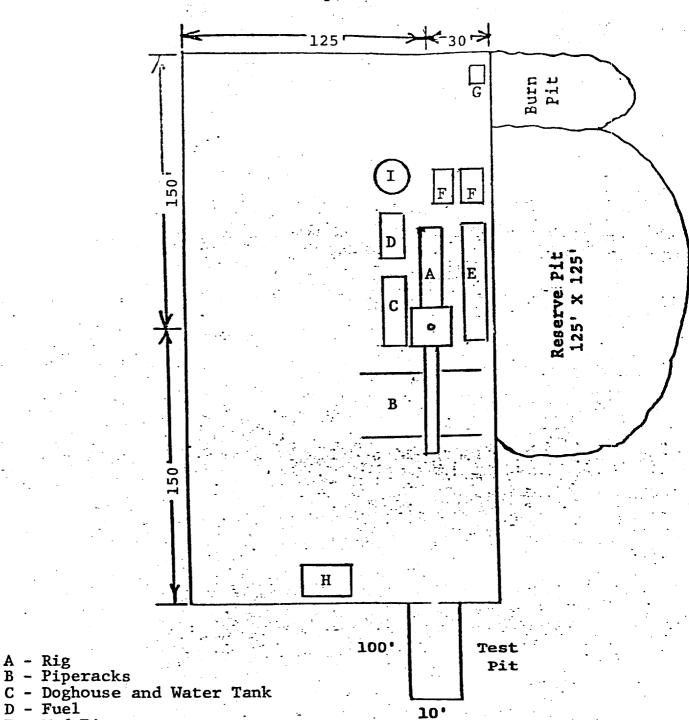

A - Rig B - Piperacks

E - Mud Pit

F - Pumps

G - Toilet

H - Trailer House I - Oil Storage

Fracturing Program
Layout
JACK A. COLE
CHACON AMIGOS NO. 2
1850 FSL, 990 FEL, SECTION 2-T22N-R3W
Sandoval County, New Mexico

