

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other ☐

2. NAME OF OPERATOR
KIMBELL OIL COMPANY

3. ADDRESS OF OPERATOR
BOX 1097, FARMINGTON, NEW MEXICO 87401


4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 640' FNL & 550' FNL, SEC. 26
AT TOP PROD. INTERVAL: T25N, R6W
AT TOTAL DEPTH: SAME

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☒
(other) ☐

SUBSEQUENT REPORT OF:



(NOTE: Report results of multiple completion operations change on Form 9-330)

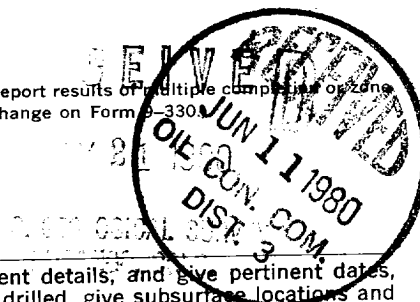

5. LEASE
82-080136

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
SALAZAR

9. WELL NO.
4-26

10. FIELD OR WILDCAT NAME
CIENCO CHICRA EXT.

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 26, T25N, R6W

12. COUNTY OR PARISH
RIO ARriba

13. STATE
NEW MEXICO

14. API NO.

15. ELEVATIONS (SHOW DE, KDB, AND WD)
6763 GR 6769 KDB

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

IT IS INTENDED TO PLUG & ABANDON THIS WELL IN THE FOLLOWING MANNER DUE TO VERY POOR INDICATIONS OF THE PRESENCE OF GAS IN THE CHICRA AND PICTURED CLIFFS FORMATIONS. (PLUGGING INSTRUCTIONS RECEIVED FROM MR. ERROL BECHER)

PUMP A 30 SACK CEMENT PLUG ACROSS THE TOP OF THE CHICRA FORMATION FROM 3560' to 3394'.

PUMP A 30 SACK CEMENT PLUG ACROSS THE TOP OF THE PICTURED CLIFFS FORMATION FROM 2720' to 2554'.

PUMP A 50 SACK CEMENT PLUG ACROSS THE ENTIRE CJO ALONG FORMATION FROM 2350' to 2074'.

PUMP A 30 SACK CEMENT PLUG ACROSS THE BOTTOM OF THE SURFACE PIPE FROM 285' to 119'.

PUMP A 17 SACK CEMENT PLUG INSIDE THE 8 5/8" SURF. PIPE FROM 50' TO SURFACE.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED _____ TITLE Prod. Supt. DATE 5-20-80

A. A. Clement

(This space for Federal or State office use)

APPROVED BY _____
CONDITIONS OF APPROVAL, IF ANY:

ck Bank

TITLE _____ DATE _____

APPROVED

NMOCC

JUN 10 1980
James F. Sims
JAMES F. SIMS

DISTRICT OIL & GAS SUPERVISOR

*See Instructions on Reverse Side

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.