


Submit 3 Copies
to Appropriate
District Office

District I
P.O. Box 1980, Hobbs, NM 88241-1980

District II
811 South First, Artesia, NM 88210

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV
2040 South Pacheco, Santa Fe, NM 87505

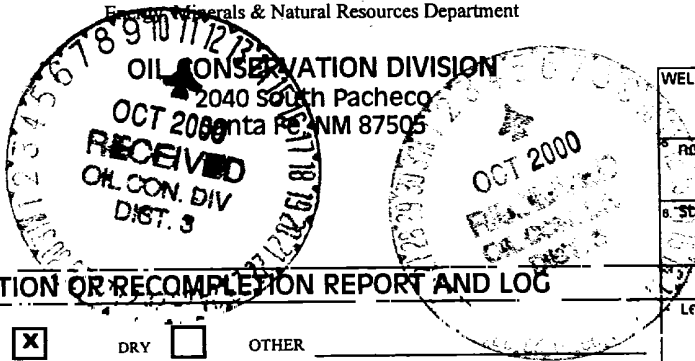

WELL API NO. **30-039-26454**

Indicate Type of Leas STATE FE

State Oil & Gas Lease No.

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1 Type of Well: OIL WELL GAS WELL DRY OTHER

1 Type of Well: NEW WELL WORK OVER DEEPEN PLUG BACK DIFF RESVR OTHER

2 Name of Operator **Pure Resources**

3 Address of Operator **P.O. BOX 850 - BLOOMFIELD, NM 87413**

4 Well Location
Unit Lette **F** : **1650'** Feet From The **NORTH** Line an **2120'** Feet From The **WEST** Line
Section **16** Township **27N** Range **06W** NMPM **RIO ARRIBA** County

6 Well No. **179M**

9 Pool name or Wildcat **BASIN DAKOTA**

Lease Name or Unit Agreement Name **RINCON UNIT**

10. Date Spudded **8/28/2000** 11. Date T.D. Reached **9/5/2000** 12. Date Compl. (Ready to Prod.) **9/20/2000** 13. Elevation (DF & RKB, RT, GR, etc.) **6554' KB** 14. Elev. Casinghead

15. Total Depth **7679'** 16. Plug Back T.D. **7666'** 17. If Multiple Compl. How Many Zones? **1** 18. Intervals Drilled By **0-7679** 19. Producing Interval(s), of this completion - Top, Bottom, Name **BASIN DAKOTA 7440' - 7642'** 20. Was Directional Survey Made

21 Type Electrical and Other Logs Run **CNL - CCL - GR** 22. Was Well Cored

CASING RECORD (Report all strings set in well)

CASING	WEIGHT LB.FT.	DEPTH SET	HOLE SIZE	CEMENT RECORD	AMOUNT PULLED
9 5/8"	32.3#	356.41'	12 1/4"	200sx Type 111cmt	
7"	20#	2749.6'	8 3/4"	325sx type 111 35;65 poz cmt	
4 1/2"	11.6#	7664'	6 1/4"	600sx type 111 35;65 poz cmt	

LINER RECORD

SIZE	TOP	BOTTOM	SACK CEMENT	SCREEN

TUBING RECORD

SIZE	DEPTH SET	PACKER SET

26. Perforation record (interval, size, and number)
7440', 7443', 7462', 7468', 7475', 7479', 7526', 7557', 7570', 7576', 7597', 7600', 7606', 7615', 7617', 7623', 7527', 7631', 7638', 7642'
(20 holes, 1 JSPP)

27. ACID, SHOT, FRACTURED, CEMENT, SQUEEZE, ETC.
DEPTH INTERVAL: **7440' - 7642'** AMOUNT AND KIND MATERIAL USED: **w/87,860 gals 70Q 30# crosslinked foam +141,360 20/40 white/sand + 9140# 14/40 flexand**

PRODUCTION

28. Date First Production **9/27/2000** Production Method (Flowing, gas lift, pumping - Size and type pump) **flowing** Well Status (Prod. Or Shut-in) **S.I.**

Date of Test **9/27/2000** Hours Tested **14 HRS** Choke Size **20/64** Prod's For Test Period **2 BBLs** Oil - Bbl. **1.08MMCDF** Gas - MCF **10 BBLs** Water - Bbl. **10 BBLs** Gas - Oil Ratio

Flow Tubing Press. **N/A** Casing Pressure **400 PSI** Calculated 24 - Hours Rate **Oil - Bbl. Gas - MCF Water Bbl. Oil Gravity - API - (Corr.)**

29. Disposition of Gas (Sold, used for fuel, vented, etc.) **VENTED** Test Witnessed By **MIKE PHILLIPS**

30. List Attachments

31. I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief

Signature **Melissa M Osborne** Printed Name **MELISSA M. OSBORNE** Title **S.J. BASIN PROD CLERK** Date **10/1/2000**

INSTRUCTIONS

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well. It shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, Items 25 through 29 shall be reported for each zone. The form is to be filed in quintuplicate except on state land, where six copies are required. See Rule 1105.

INDICATE FORMATION TOPS IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE

Southeastern New Mexico

T. Anhy _____	T. Canyon _____
T. Salt _____	T. Strawn _____
B. Salt _____	T. Atoka _____
T. Yates _____	T. Miss _____
T. Rivers _____	T. Devonian _____
T. Queen _____	T. Silurian _____
T. Grayburg _____	T. Montoya _____
T. San Andres _____	T. Simpson _____
T. Glorieta _____	T. McKee _____
T. Paddock _____	T. Ellenburger _____
T. Blinebry _____	T. Gr. Wash _____
T. Tubb _____	T. Delaware Sand _____
T. Drinkard _____	T. Bone Sprints _____
T. Abo _____	T. _____
T. Wolfcamp _____	T. _____
T. Penn _____	T. _____
T. Cisco (Bough C) _____	T. _____

Northwestern New Mexico

T. Ojo Alamo _____	T. Penn. "B" _____
T. Kirtland-Fruitland 3019'	T. Penn. "C" _____
T. Pictured Cliffs 3198'	T. Penn. "D" _____
T. Cliff House 4873'	T. Leadville _____
T. Menefee 5006'	T. Madison _____
T. Point Lookout 5412'	T. Elbert _____
T. Mancos 5480'	T. McCracken _____
T. Gallup 6581'	T. Ignacio Otzte _____
Basin Greenhorn 7340'	T. Granite _____
T. Dakota 7554'	T. _____
T. Morrison _____	T. _____
T. Todilto _____	T. _____
T. Entrada _____	T. _____
T. Wingate _____	T. _____
T. Chinle _____	T. _____
T. Permian _____	T. _____
T. Penn "A" _____	T. _____

OIL OR GAS SANDS OR ZONES

No. 1, from 6580'	to 6600'	No. 3, from 7440'	to 7490'
No. 2, from 6880'	to 6910'	No. 4, from 7554'	to 7644'

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 630'	to 930'	feet 300'	
No. 2, from 1100'	to 1210'	feet 120'	
No. 3, from 1490'	to 1560'	feet 70'	

LITHOLOGY RECORD (Attach additional sheet if necessary)

From	To	Thickness in Feet	Lithology	From	To	Thickness in Feet	Lithology
630	930	300	SAND/CLAY				
1100	1210	120	SAND/CLAY				
1490	1560	70	SAND/CLAY				
1950'	2010	60	SAND/CLAY				
2340	2370	30	SAND/SILT				
2490'	2520	30	SAND/CLAY				
3230	3270	40	SAND				
4875	4980	105	SAND/SILT/SH				
5430	5540	110	SAND/SLIT/SH				
6580	6600	20	SILT				
6880	6910	30	SILT				
7440	7490	50	SILT/SAND				
7554	7644	90	SAND/SLIT				