

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well gas ☒ well other ☐  
2. NAME OF OPERATOR  
El Paso Natural Gas Company  
3. ADDRESS OF OPERATOR  
Box 289, Farmington, New Mexico 87401  
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 2335' S, 2225'E  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) ☐

SUBSEQUENT REPORT OF:

☒  
☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐

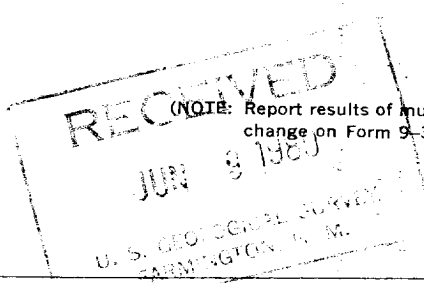

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

- 5-28-80: PBTD 8418'. Tested casing to 3500#, OK. Perfed Dakota 8176,8180,8184,8188,8192, 8204,8275,8280,8308,8312,8318,8324,8355,8359,8364,8384' W/1 SPZ. Fraced w/ 127,000# 20/40 sand, 90,000 gal. wtr. Flushed w/ 17,875 gal. wtr.
- 5-29-80: Perfed Lower P.L. 6338,6346,6361,6382,6390,6412,6428,6445,6453,6479,6492,6510, 6519,6532' W/1 SPZ. Fraced w/ 32,500#, 20/40 sand, 65,000 gal. wtr. Flushed w/16,968 gal. wtr. Perfed Massive P.L. 6143,6149,6155,6161,6167,6173,6179, 6185,6191,6201,6207,6213,6219,6236,6248,6256,6272,6288,6300' W/1SPZ. Fraced w/ 65,500# 20/40 sand,131,000 gal. wtr. Flushed w/16,716 gal. wtr.
- 5-29-80: Perfed Men. & C.H. 5678,5688,5724,5730,5741,5766,5783,5790,5873,5879' W/1 SPZ. Fraced w/ 33,000# 20/40 sand, 66,000 gal. wtr. Flushed w/ 16,128 gal. wtr.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.


18. I hereby certify that the foregoing is true and correct

SIGNED A. J. Brice TITLE Drilling Clerk DATE June 4, 1980

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

\*See Instructions on Reverse Side



ACCEPTED FOR RECORD

JUN 17 1980

BY [Signature]