Form 5,160-3 (Lugust 1999)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FORM APPROVED OMB NO. 1004-0136 Expires: November 30, 2000

BUREAU OF LAND MANAGE		Expires: November 30, 2000				
APPLICATION FOR PERMIT TO DRII	5	5. Lease Serial No. JIC CONT 95				
		√ 	6	. If Indian, Allotee o	r Tribe Name	
la. Type of Work DRILL REEN	TIER /	~ €0 2001		Jicarilla Ap		
lb. Type of Well Oil Well Gas Well Other	Sir	igle Zone X Multiple Zone	e 1 7	Unit or CA Agreen	ment Name and No.	
2. Name of Operator	Ü		. / 8	Lease Name and W	ell No.	
Energen Resources Corporation		3b. Phone No. (include area co	10)	Jicarilla 95	#8C	
a. Address 2198 Bloom field Highway, Farmington, NM 87401		505-325-6800			9-76 890	
Location of Well (Report location clearly and in accordance with any At surface 1865' FNL, 1795' FEL	State equi	rements)*		D. Field and Pool, or Blanco MV, W	IC /27N3W26 : Mancos	
At proposed prod. zone					Blk. and Survey or Area N, R3W, N.M.P.M.	
4. Distance in miles and direction from nearest town or post office*				2. County or Parish	13.State	
18 Miles Northwest of Lind	rith N	lew Mexico	l _R	io Arriba	l NM	
5. Distance from proposed*		No. of Acres in lease		ing Unit dedicated to		
location to nearest property or lease line, ft. (Also to nearest drg. unit line, if any)		2560	#12 mu NE/4			
Distance from proposed location*		Proposed Depth	20.BLM	A/BIA Bond No. on	file	
to nearest well, drilling, completed, applied for, on this lease, ft. 1300'	:	8057				
21. Elevations (Show whether DF, KDB, RT, GL, etc.	22.	Approximate date work will sta	rt*	23. Estimated du	ration	
7249' GL		Jan 2002		14 days		
7247 UL	24. Att	achments				
The following, completed in accordance with the requirements of Onshore			to this fo	orm:		
 Well plat certified by a registered surveyor. A Drilling Plan A Surface Use Plan (if the location is on National Forest System Land SUPO shall be filed with the appropriate Forest Service Office). 	s, the	 Bond to cover the operat Item 20 above). Operator certification. Such other site specific ir authorized officer. 				
25. Signuature	Name (Printed/Typed)		Date		
Son Fradam		Graham			9/19/01	
Title						
Production Superintendent						
Approved by (Signautre) /s/ Brian W. Davis		ame (Printed/Typed)		Date	Date DEC 1 9 2001	
Cictma asst. Fill Man	Office					
Application approval does not warrant or certify that the applicant holds conduct operations thereon. Conditions of approval, if any, are attached.	legal or e	equitable title to those rights in	the subje	ect lease which wou	d entitle the applicant to	
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a States any false, fictitious or fraudulent statements or representations as to	crime for any matte	any person knowlingly and willf r within its jurisdiction.	ully to ma	ake to any departmen	nt or agency of the United	
*(Instructions on Reverse)						

District I PO *** 1980, Hobbs, NM 88241-1980

District II PO Drawer DC. Antesia, NM 88211-0719

District III 1000 Rio Brazos Rd., Aztec, NM 87410

District IV PO Box 2088. Santa Fe. NM 87504-2088

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION PO Box 2088 Santa Fe, NM 87504-2088

Form C-102 Revised February 21, 1994 Instructions on back Submit to Appropriate District Office

State Lease - 4 Copies Fee Lease - 3 Copies

AMENDED REPORT


		•	WELL	LOCAT	ION AND) A(CREAGE DED	ICATION PL	AT		
	PI Numbe			*Pool Coo				³Pcol Nam		۰	
30-039	1- 26	,890	723	319 - <u>9</u>			lanco Mesave	erde - WUZ			
*Property Code *Property Name				*Well Number 8C							
212	87	JICARILLA 95					*Elevation				
'OGRID N		*Operator Name					7249				
16292	28		ENERGEN RESOURCES CORPORATION						/ 245 		
					¹⁰ Surfa		Location	·			
UL or lat no.	Section	Township	Range	Let Ich	Feet from	-	North/South line	Feet from the	1	est line	RIO
G	26	27N	3W		1865		NORTH	1795	EA	ST	ARRIBA
		11 🖯	ottom		<u>ocation</u>		f Different	From Surf			
UL or lot no.	Section	Township	Range	Lot Ion	Feet from	tre	North/South line	Feet from tre	East/We	est line	County
										 -	<u> </u>
Dedicated Acres					u Joint or In	fill	¹⁴ Consolidation Code	²⁵ Orden Na.			
	320/1	60						<u> </u>			
NO ALLOW	IABLE W	ILL EE A	SSIGNE NON-ST	O TO THE	IS COMPL UNIT HAS	ETIC 3 BE	ON UNTIL ALL EN APPROVED	EX THE DIVI	S10N		
16 		200	52	289,24	1865		1795'	I rerebicontaine to the Signatur Don (Printed Produ	y centify defering the destroy of my destroy of my e Graham Name	that the is true and knowledge	FICATION information d complete e and belief
. 00				26		~		I hereby snown on notes of	centify th this plat actual sur	nat the we was plott veys made	FICATION 11 location ed from field by me or under same is true

and connect to the best of my belief. Date of Survey: AUGUST 29, 2001 Signature and Seal of Professional Surveyor

5286,60

SON C. EDWARDS EN MEXICO AND ESSION

Centificate Number

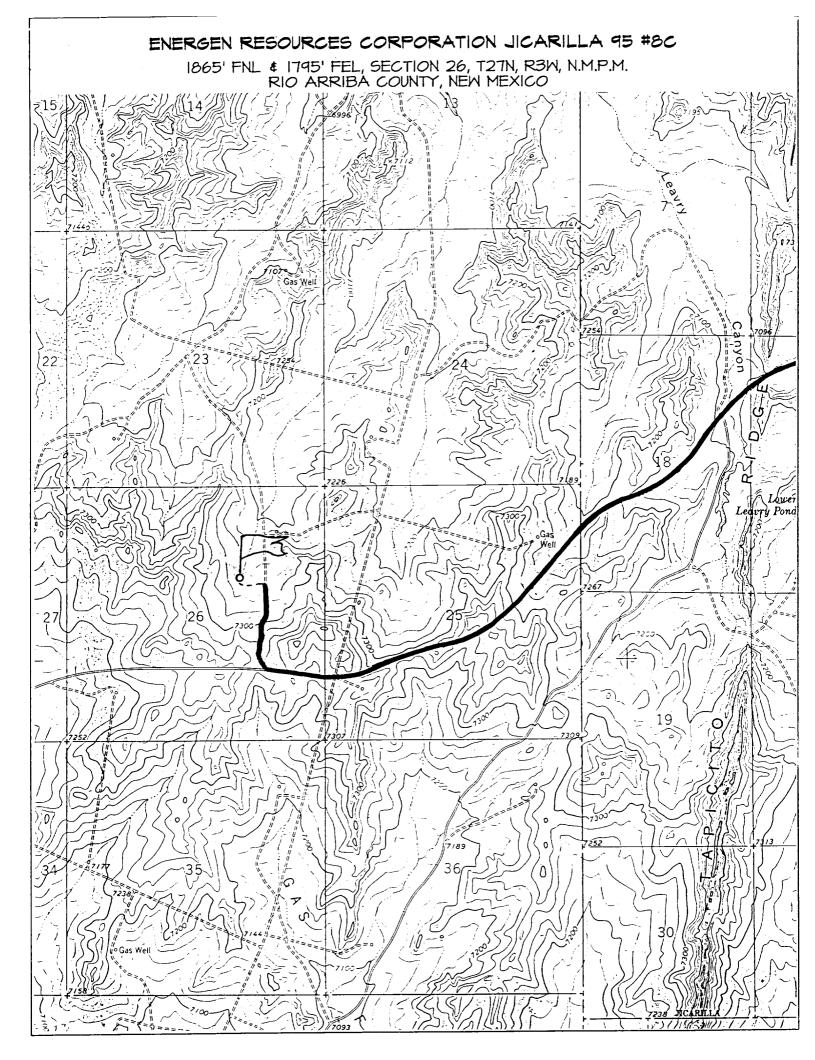

BOP SPECIFICATIONS:

An 11" 2000 psi minimum double gate BOP stack (Figure 1) will be used following nipple up of casing head. During air drilling operations, a Shaffer Type 50 or equivalent rotating head will be installed on top of the stack. A 2" nominal, 2000 psi minimum choke manifold will be used. An upper Kelly Cock valve with handle available and drill string valve to fit each drill string will be available on the rig floor during drilling operations.

CEMENTING:

9 5/8 surface casing - Cement with 110 sxs Class B Cement with 1/4" Flocele/sx and 2% calcium chloride (130 cu. ft. of slurry, 100% excess to circulate to surface). WOC 12 hrs. Test casing to 600# for 30 minutes.

Texas Pattern Guide Shoe on bottom with centralizers on the first three joints.

7" intermediate casing - cement with 440 sks 65/35 Class B Poz with 6% gel, 2% calcium chloride, 10% gilsonite, and 1/4# flocele/sk. Tail with 100 sks Class B w/2% calcium chloride, 10% gilsonite and 1/4# flocele/sk. (966 cu. Ft. of slurry, 50% excess to circulate to surface). WOC 12 hrs. If cement does not circulate, run temperature survey in 8 hrs. to determine TOC. Test casing to 1200 psi for 30 minutes.

Cement nose guide shoe on bottom with a self-fill insert float valve on top of shoe joint. 8 bow spring centralizers spaced every 2nd joint off bottom. Two turbolating centralizers at the base of the Ojo Alamo.

4 1/2 Production Liner

Cement with 480 sks 50/50 poz with 2% gel, 5 PPS gilsonite, .4% halad - 9 and 1/4# flocele/sk (605 cu. Ft., 50% excess to intermediate casing). WOC 18 hrs prior to completion.

Cement nose guide shoe on bottom with float collar on top of shoe joint. Liner hanger will have a neopreme packoff on top.

OTHER INFORMATION:

- 1) The Blanco Mesaverde and Gallup Dakota will be completed and downhole commingled.
- 2) No abnormal temperatures or pressures are anticipated.
- 3) Anticipated pore pressure for the Gallup is 900, Mesa Verde is 800, Pictured Cliffs is 500 and the Fruitland 400 psi.
- 4) If lost circulation is encountered, sufficient LCM will be added to the mud system to maintain well control.
- 5) This gas is dedicated.

OPERATIONS PLAN

WELL NAME: Jicarilla 95 #8C

<u>LOCATION:</u> 1865' FNL, 1795' FEL, Section 26, T27N, R3W, Rio Arriba, New Mexico <u>FIELD:</u> Blanco MV/WC: 27N3W26G; Mancos ELEVATION: 7249'

FORMATION TOPS:

Surface	San Jose	· · · · ·	Huerfanito Benonite	4411
Surface Ojo Alamo	3294 NEW MENTS	1650	Cliff House	5487
Kirtland	3641		Menefee	5751
Fruitland	3736		Point Lookout	6016
Pictured Cliffs	3874		Gallup	7102
Lewis	4081			

Total Depth 8057

LOGGING PROGRAM:

Open Hole Logs:

Surface to intermediate: NONE

Inter TD to total depth: Temp/HRI/CNT, LDT/GR

Mud Logs: 3600' to total depth

Coring: None

Natural Gauges: Every 500' from intermediate TD to total depth

<u>MUD PROGRAM</u>: Fresh water low solids mud from surface to intermediate TD (9.0 - 9.2 PPG). Air/mist from intermediate casing point to total depth.

CASING PROGRAM:

HOLE SIZE	<u>DEPTH</u>	CSG SIZE	<u>WT.</u>	<u>GRADE</u>
12-1/4"	200'	9-5/8"	36#	J-55
8-3/4"	4281'	7"	20/23#	J-55
6-1/4"	4131'-8057'	4-1/2"	11.6#	J-55

TUBING PROGRAM:

7900' 2 3/8 4.7# J-55

WELLHEAD: 11" 3000 x 9 5/8" casing head. 11" 3000 x 7 1/16" 3000 xmas tree.