

5 USGS, Fmn

1 McHugh

1 File

Form 9-331
Dec. 1973Form Approved.
Budget Bureau No. 42-R1424

**UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY**

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other ☐
2. NAME OF OPERATOR
Jerome P. McHugh
3. ADDRESS OF OPERATOR
P O Box 208, Farmington, NM 87401
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1150' FNL - 190' FEL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

- TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

- ☐
☐
☐
☐
☐
☐
☐
☒

5. LEASE
NM 16471

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Bengal B9. WELL NO.
#3R10. FIELD OR WILDCAT NAME
South Gallegos Fruitland11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
A Sec 2 T26N R12W12. COUNTY OR PARISH
San Juan13. STATE
NM

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
5962' GL

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Plugged and abandoned well as follows:

1. Spotted 10 sk cement plug in open hole.
2. Placed cement plug from 370' to 270', 10 sx cement.
3. Placed 20 sx cement plug from 150' to surface.
4. Placed mud with consistency of 9.2 lb./gal. between plugs.
5. Filled all pits.
6. Cleaned well location of all equipment, pipe, junk, and trash.

Since site is on the edge of NIPP farming unit:

1. Cut off casing 3' below ground level, with NO DRY HOLE MARKER.
2. Site left in condition for farming.
 - a. No reseeding required.
 - b. No equipment within 3' of surface.
 - c. Ripped pad and access roads.

Subsurface Safety Valve: Manu. and Type

Set @

18. I hereby certify that the foregoing is true and correct

SIGNED


Sherman Dugan

TITLE

Agent

DATE

2-16-82

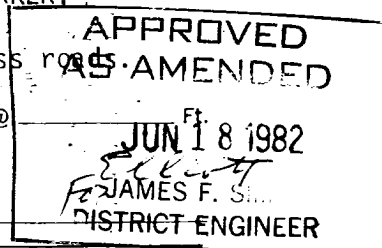

(This space for Federal or State office use)

ACCEPTED FOR RECORD

APPROVED BY
CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

NMOCC

FEB 24 1982

FARMINGTON DISTRICT

*See Instructions on Reverse Side

BY