

NEW MEXICO OIL CONSERVATION COMMISSION

Well Location and Acreage Dedication Plat

Section A.

Date **OCTOBER 18, 1956**

Operator **EL PASO NATURAL GAS PRODUCTS COMPANY** Lease **SULLIVAN "D"** SF **081028-A**
 Well No. **2** Unit Letter **0** Section **26** Township **26-N** Range **13-W** NMPM
 Located **660** Feet From **SOUTH** Line **1978** Feet From **EAST** Line
 County **SAN JUAN** G. L. Elevation **6196** Dedicated Acreage **80** Acres
 Name of Producing Formation **GALLUP** Pool **BISTI**

1. Is the Operator the only owner in the dedicated acreage outlined on this plat or on?
 Yes ☒ No ☐
2. If the answer to question one is "No", have the interests of all the owners been consolidated by communitization agreement or otherwise? Yes ☐ No ☐ If answer is "No", Type of Consolidation:

3. If the answer to question two is "No", list all the owners and their respective interests in the dedicated acreage.
- Owner _____ Land Description _____



Section B.

Note: All distances are to the outer boundaries of section.

This is to certify that the information in Section A above is true and complete to the best of my knowledge and belief.

El Paso Natural Gas Products Co.

(Operator)

(Representative)


Post Office Box 1565

(Address)

Farlington, New Mexico

SECTION 26

NOTE: THIS PLAT IS RE-ISSUED TO SHOW CORRECTED DEDICATION.

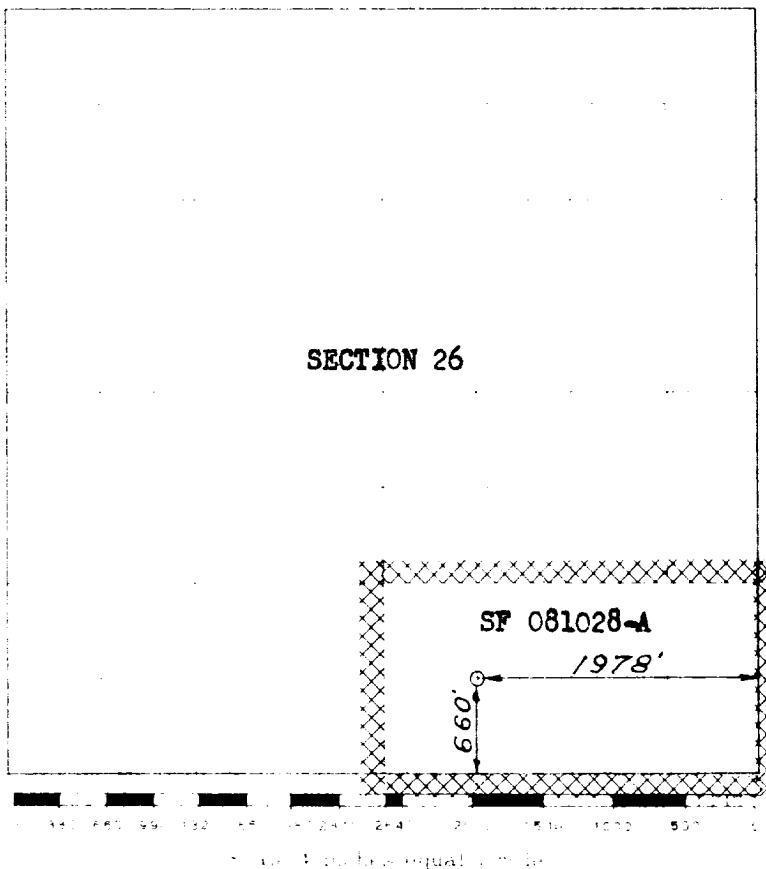

This is to certify that the above plat was drawn from field notes of actual surveys made by me or under my supervision, and that the same are true and correct to the best of my knowledge and belief.

Signed

Date sworn to

OCTOBER 2, 1956

Farlington, New Mexico

David C. Kilven
 Registered Professional Engineer and/or Land Surveyor

AZTEC DISTRICT OFFICE

No. 6010

Figure 1. The effect of the concentration of the polymer on the swelling ratio of the hydrogel. The swelling ratio of the hydrogel increases with the increase of the polymer concentration. The swelling ratio of the hydrogel is 1.0 at 0.1 g/L, 1.5 at 0.2 g/L, 2.0 at 0.3 g/L, 2.5 at 0.4 g/L, 3.0 at 0.5 g/L, 3.5 at 0.6 g/L, 4.0 at 0.7 g/L, 4.5 at 0.8 g/L, 5.0 at 0.9 g/L, 5.5 at 1.0 g/L, 6.0 at 1.1 g/L, 6.5 at 1.2 g/L, 7.0 at 1.3 g/L, 7.5 at 1.4 g/L, 8.0 at 1.5 g/L, 8.5 at 1.6 g/L, 9.0 at 1.7 g/L, 9.5 at 1.8 g/L, 10.0 at 1.9 g/L, 10.5 at 2.0 g/L, 11.0 at 2.1 g/L, 11.5 at 2.2 g/L, 12.0 at 2.3 g/L, 12.5 at 2.4 g/L, 13.0 at 2.5 g/L, 13.5 at 2.6 g/L, 14.0 at 2.7 g/L, 14.5 at 2.8 g/L, 15.0 at 2.9 g/L, 15.5 at 3.0 g/L, 16.0 at 3.1 g/L, 16.5 at 3.2 g/L, 17.0 at 3.3 g/L, 17.5 at 3.4 g/L, 18.0 at 3.5 g/L, 18.5 at 3.6 g/L, 19.0 at 3.7 g/L, 19.5 at 3.8 g/L, 20.0 at 3.9 g/L, 20.5 at 4.0 g/L, 21.0 at 4.1 g/L, 21.5 at 4.2 g/L, 22.0 at 4.3 g/L, 22.5 at 4.4 g/L, 23.0 at 4.5 g/L, 23.5 at 4.6 g/L, 24.0 at 4.7 g/L, 24.5 at 4.8 g/L, 25.0 at 4.9 g/L, 25.5 at 5.0 g/L, 26.0 at 5.1 g/L, 26.5 at 5.2 g/L, 27.0 at 5.3 g/L, 27.5 at 5.4 g/L, 28.0 at 5.5 g/L, 28.5 at 5.6 g/L, 29.0 at 5.7 g/L, 29.5 at 5.8 g/L, 30.0 at 5.9 g/L, 30.5 at 6.0 g/L, 31.0 at 6.1 g/L, 31.5 at 6.2 g/L, 32.0 at 6.3 g/L, 32.5 at 6.4 g/L, 33.0 at 6.5 g/L, 33.5 at 6.6 g/L, 34.0 at 6.7 g/L, 34.5 at 6.8 g/L, 35.0 at 6.9 g/L, 35.5 at 7.0 g/L, 36.0 at 7.1 g/L, 36.5 at 7.2 g/L, 37.0 at 7.3 g/L, 37.5 at 7.4 g/L, 38.0 at 7.5 g/L, 38.5 at 7.6 g/L, 39.0 at 7.7 g/L, 39.5 at 7.8 g/L, 40.0 at 7.9 g/L, 40.5 at 8.0 g/L, 41.0 at 8.1 g/L, 41.5 at 8.2 g/L, 42.0 at 8.3 g/L, 42.5 at 8.4 g/L, 43.0 at 8.5 g/L, 43.5 at 8.6 g/L, 44.0 at 8.7 g/L, 44.5 at 8.8 g/L, 45.0 at 8.9 g/L, 45.5 at 9.0 g/L, 46.0 at 9.1 g/L, 46.5 at 9.2 g/L, 47.0 at 9.3 g/L, 47.5 at 9.4 g/L, 48.0 at 9.5 g/L, 48.5 at 9.6 g/L, 49.0 at 9.7 g/L, 49.5 at 9.8 g/L, 50.0 at 9.9 g/L, 50.5 at 10.0 g/L, 51.0 at 10.1 g/L, 51.5 at 10.2 g/L, 52.0 at 10.3 g/L, 52.5 at 10.4 g/L, 53.0 at 10.5 g/L, 53.5 at 10.6 g/L, 54.0 at 10.7 g/L, 54.5 at 10.8 g/L, 55.0 at 10.9 g/L, 55.5 at 11.0 g/L, 56.0 at 11.1 g/L, 56.5 at 11.2 g/L, 57.0 at 11.3 g/L, 57.5 at 11.4 g/L, 58.0 at 11.5 g/L, 58.5 at 11.6 g/L, 59.0 at 11.7 g/L, 59.5 at 11.8 g/L, 60.0 at 11.9 g/L, 60.5 at 12.0 g/L, 61.0 at 12.1 g/L, 61.5 at 12.2 g/L, 62.0 at 12.3 g/L, 62.5 at 12.4 g/L, 63.0 at 12.5 g/L, 63.5 at 12.6 g/L, 64.0 at 12.7 g/L, 64.5 at 12.8 g/L, 65.0 at 12.9 g/L, 65.5 at 13.0 g/L, 66.0 at 13.1 g/L, 66.5 at 13.2 g/L, 67.0 at 13.3 g/L, 67.5 at 13.4 g/L, 68.0 at 13.5 g/L, 68.5 at 13.6 g/L, 69.0 at 13.7 g/L, 69.5 at 13.8 g/L, 70.0 at 13.9 g/L, 70.5 at 14.0 g/L, 71.0 at 14.1 g/L, 71.5 at 14.2 g/L, 72.0 at 14.3 g/L, 72.5 at 14.4 g/L, 73.0 at 14.5 g/L, 73.5 at 14.6 g/L, 74.0 at 14.7 g/L, 74.5 at 14.8 g/L, 75.0 at 14.9 g/L, 75.5 at 15.0 g/L, 76.0 at 15.1 g/L, 76.5 at 15.2 g/L, 77.0 at 15.3 g/L, 77.5 at 15.4 g/L, 78.0 at 15.5 g/L, 78.5 at 15.6 g/L, 79.0 at 15.7 g/L, 79.5 at 15.8 g/L, 80.0 at 15.9 g/L, 80.5 at 16.0 g/L, 81.0 at 16.1 g/L, 81.5 at 16.2 g/L, 82.0 at 16.3 g/L, 82.5 at 16.4 g/L, 83.0 at 16.5 g/L, 83.5 at 16.6 g/L, 84.0 at 16.7 g/L, 84.5 at 16.8 g/L, 85.0 at 16.9 g/L, 85.5 at 17.0 g/L, 86.0 at 17.1 g/L, 86.5 at 17.2 g/L, 87.0 at 17.3 g/L, 87.5 at 17.4 g/L, 88.0 at 17.5 g/L, 88.5 at 17.6 g/L, 89.0 at 17.7 g/L, 89.5 at 17.8 g/L, 90.0 at 17.9 g/L, 90.5 at 18.0 g/L, 91.0 at 18.1 g/L, 91.5 at 18.2 g/L, 92.0 at 18.3 g/L, 92.5 at 18.4 g/L, 93.0 at 18.5 g/L, 93.5 at 18.6 g/L, 94.0 at 18.7 g/L, 94.5 at 18.8 g/L, 95.0 at 18.9 g/L, 95.5 at 19.0 g/L, 96.0 at 19.1 g/L, 96.5 at 19.2 g/L, 97.0 at 19.3 g/L, 97.5 at 19.4 g/L, 98.0 at 19.5 g/L, 98.5 at 19.6 g/L, 99.0 at 19.7 g/L, 99.5 at 19.8 g/L, 100.0 at 19.9 g/L, 100.5 at 20.0 g/L, 101.0 at 20.1 g/L, 101.5 at 20.2 g/L, 102.0 at 20.3 g/L, 102.5 at 20.4 g/L, 103.0 at 20.5 g/L, 103.5 at 20.6 g/L, 104.0 at 20.7 g/L, 104.5 at 20.8 g/L, 105.0 at 20.9 g/L, 105.5 at 21.0 g/L, 106.0 at 21.1 g/L, 106.5 at 21.2 g/L, 107.0 at 21.3 g/L, 107.5 at 21.4 g/L, 108.0 at 21.5 g/L, 108.5 at 21.6 g/L, 109.0 at 21.7 g/L, 109.5 at 21.8 g/L, 110.0 at 21.9 g/L, 110.5 at 22.0 g/L, 111.0 at 22.1 g/L, 111.5 at 22.2 g/L, 112.0 at 22.3 g/L, 112.5 at 22.4 g/L, 113.0 at 22.5 g/L, 113.5 at 22.6 g/L, 114.0 at 22.7 g/L, 114.5 at 22.8 g/L, 115.0 at 22.9 g/L, 115.5 at 23.0 g/L, 116.0 at 23.1 g/L, 116.5 at 23.2 g/L, 117.0 at 23.3 g/L, 117.5 at 23.4 g/L, 118.0 at 23.5 g/L, 118.5 at 23.6 g/L, 119.0 at 23.7 g/L, 119.5 at 23.8 g/L, 120.0 at 23.9 g/L, 120.5 at 24.0 g/L, 121.0 at 24.1 g/L, 121.5 at 24.2 g/L, 122.0 at 24.3 g/L, 122.5 at 24.4 g/L, 123.0 at 24.5 g/L, 123.5 at 24.6 g/L, 124.0 at 24.7 g/L, 124.5 at 24.8 g/L, 125.0 at 24.9 g/L, 125.5 at 25.0 g/L, 126.0 at 25.1 g/L, 126.5 at 25.2 g/L, 127.0 at 25.3 g/L, 127.5 at 25.4 g/L, 128.0 at 25.5 g/L, 128.5 at 25.6 g/L, 129.0 at 25.7 g/L, 129.5 at 25.8 g/L, 130.0 at 25.9 g/L, 130.5 at 26.0 g/L, 131.0 at 26.1 g/L, 131.5 at 26.2 g/L, 132.0 at 26.3 g/L, 132.5 at 26.4 g/L, 133.0 at 26.5 g/L, 133.5 at 26.6 g/L, 134.0 at 26.7 g/L, 134.5 at 26.8 g/L, 135.0 at 26.9 g/L, 135.5 at 27.0 g/L, 136.0 at 27.1 g/L, 136.5 at 27.2 g/L, 137.0 at 27.3 g/L, 137.5 at 27.4 g/L, 138.0 at 27.5 g/L, 138.5 at 27.6 g/L, 139.0 at 27.7 g/L, 139.5 at 27.8 g/L, 140.0 at 27.9 g/L, 140.5 at 28.0 g/L, 141.0 at 28.1 g/L, 141.5 at 28.2 g/L, 142.0 at 28.3 g/L, 142.5 at 28.4 g/L, 143.0 at 28.5 g/L, 143.5 at 28.6 g/L, 144.0 at 28.7 g/L, 144.5 at 28.8 g/L, 145.0 at 28.9 g/L, 145.5 at 29.0 g/L, 146.0 at 29.1 g/L

[illegible]

Chester

[illegible]

1. The first step is to identify the problem or question that needs to be answered. This involves understanding the context and the specific requirements of the task.

1. The first step in the process is to identify the problem or issue that needs to be addressed. This involves gathering information and understanding the context of the problem.

1. The first step is to identify the key components of the system. This includes understanding the hardware, software, and data involved. 2. The second step is to define the requirements for the system. This includes identifying the functional requirements, performance requirements, and security requirements. 3. The third step is to design the system architecture. This includes determining the overall structure of the system, the components, and the data flow. 4. The fourth step is to implement the system. This includes developing the code, configuring the hardware, and testing the system. 5. The fifth step is to maintain the system. This includes monitoring the system performance, updating the software, and addressing any issues that arise.

1000