

State of New Mexico
Energy, Minerals and Natural Resources Department
OIL CONSERVATION DIVISION

Form C-103

Sundry Notices and Reports on Wells

1. Type of Well GAS	API NO. (assigned by OCD)
2. Operator Southland Royalty Company	5. Type of Lease Fee
3. Address & Phone No. of Operator PO Box 4289, Farmington, NM 87499	6. State Oil & Gas Lease #
4. Location of Well 830'S, 1100'W Sec. 35, T-31-N, R- 4-W NMPM County Rio Arriba	7. Lease or Unit Agree. Name Chicosa Canyon
10. Elevations 6874 GR	8. Well No. 1
11. Intent to/Subsequent Report of : Plug back & recomple	9. Pool Name or Wildcat Undes. Gallup
12. Describe proposed or completed operations:	

RECEIVED

SEP 14 1989

OIL CON. DIV.

DIS 8

It is intended to plug back the Gallup and recomple in the Fruitland Coal formation in the following manner:

Set cmt retainer @ 7229'. Pressure test csg to 3000 psi. Squeeze Gallup perfs w/94 sx cmt. Spot 6 sx on retainer. Perf 2 squeeze haoles @ 6202'. Set cmt retainer @ 5755'. Squeeze Mesa Verde w/182 sx cmt. Perf 4 squeeze holes @ 3750'. Set cmt ret @ 3740'. Squeeze w/224 sx cmt. Run CBL. Spot 200 gal 7 1/2% HCl at 3640'. Perforate @ 3564-66', 3582-84', 3588-94' and 3608-39'. Break down perfs w/4 gal acid per perf. Evaluate well. Fracture stimulate w/145,000# sand and 89,460 gal. fluid. Flow well back. Land 2 3/8" tbq @ 3620'.

If circulation is established
attempt to circulate cement.

SIGNATURE *Reginald B. ...* Regulatory Affairs

9-13-89
Date

THIS SPACE FOR STATE USE

APPROVED BY Original Signed by FRANK T. CHAVEZ
CONDITION OF APPROVAL, IF ANY:

TITLE

SUPERVISOR DISTRICT #


DATE

SEP 14 1989

Chicosa Canyon #1

WELLBORE DIAGRAM

CURRENT

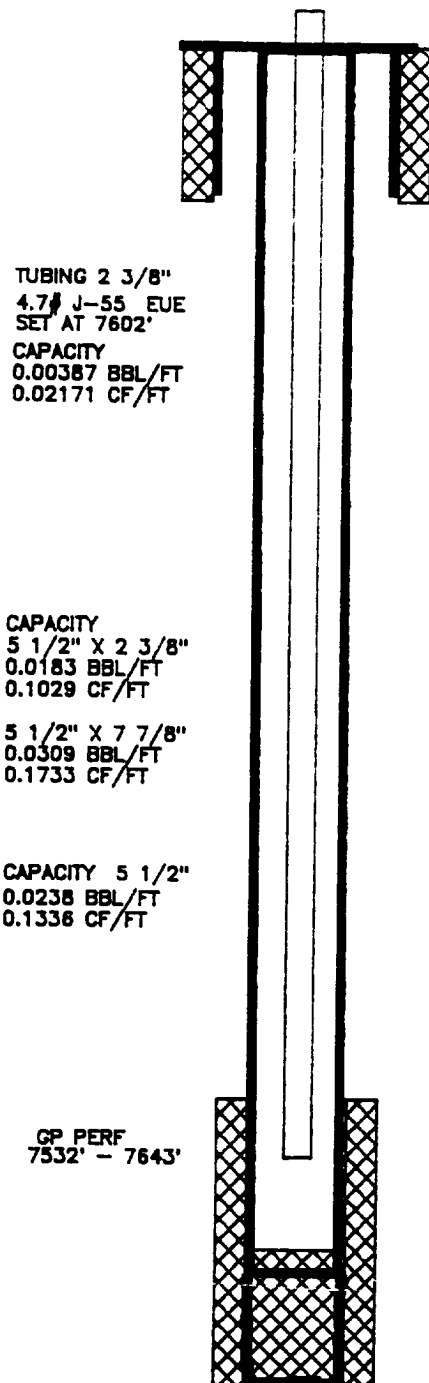

8/28/89

PROPOSED

9 5/8" 32.3# H-40
SET AT 257'
CMT TO SURFACE

